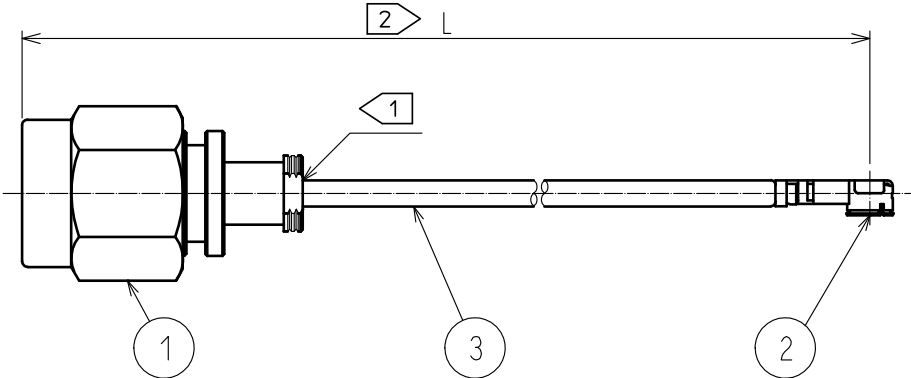
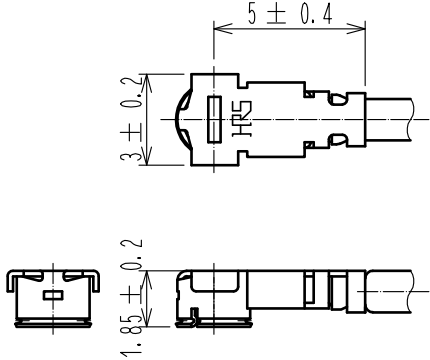
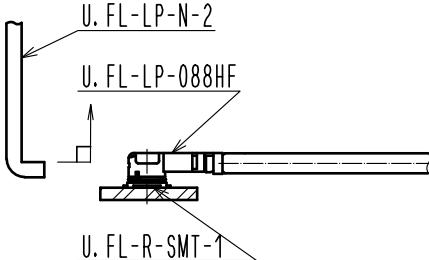



1		2		3		4													
A		B		C		D													
																			
NOTE  Do not apply any excessive stress to the cable assembly position.																			
NOTE  We indicate the length of the harness on the last of product name. 'L' part.																			
<table border="1"><thead><tr><th colspan="2">Tolerance for [L]</th></tr><tr><th>Length L [mm]</th><th>Tolerance [mm]</th></tr></thead><tbody><tr><td>$\triangle 50 \leq L \leq 200$</td><td>$\pm 4$</td></tr><tr><td>$200 < L \leq 500$</td><td>$\pm 8$</td></tr><tr><td>$500 < L \leq 1000$</td><td>$\pm 12$</td></tr><tr><td>$1000 < L$</td><td>$\pm 1.5\%$</td></tr></tbody></table>								Tolerance for [L]		Length L [mm]	Tolerance [mm]	$\triangle 50 \leq L \leq 200$	± 4	$200 < L \leq 500$	± 8	$500 < L \leq 1000$	± 12	$1000 < L$	$\pm 1.5\%$
Tolerance for [L]																			
Length L [mm]	Tolerance [mm]																		
$\triangle 50 \leq L \leq 200$	± 4																		
$200 < L \leq 500$	± 8																		
$500 < L \leq 1000$	± 12																		
$1000 < L$	$\pm 1.5\%$																		
3. Specifications are subject to change without notice.																			
[DIMENSIONS OF CONNECTOR]  [PRECAUTIONS FOR HANDLING] ◆ Connector insertion and extraction a. Connector shall be extracted vertically by specialised extraction JIG. Part No. : U.FL-LP-N-2 (CL Code: CL331-0494-5) Never hold the cable when extracting the cable because it damages the connector. b. Insert the connector as perpendicularly to the mating surface as possible by aligning the mating axes of both connectors. Do not excessively slant the connectors when inserting. ◆ Allowable loads on the cable after the connectors are mated. The figures below show the maximum allowable loads on the cable. Do not apply loads exceeding these values to the cable. 																			
2		U.FL-LP-088HF(06)		CL331-0560-8-06															
1		HRM-200-088PBN(40)		CL323-0800-5-40		3													
N o.		PART NO.		CODE NO.		N o.													
UNITS mm				SCALE FREE		COUNT 													
				DESCRIPTION OF REVISIONS DIS-D-00003732		DESIGNED NK. OOSAWA													
						CHECKED TO. KATAYAMA													
						DATE 20181206													
F		HRS HIROSE ELECTRIC CO., LTD.		APPROVED : TO. KATAYAMA 20180627		DRAWING NO.													
				CHECKED : TO. KATAYAMA 20180627		PART NO.													
				DESIGNED : YI. FUNADA 20180627		CODE NO.													
				DRAWN : YI. FUNADA 20180627		1/1													
						HRMP-UFLHF6-088N*T-ALRS													

FORM HC0011-5-51

2

3

4