

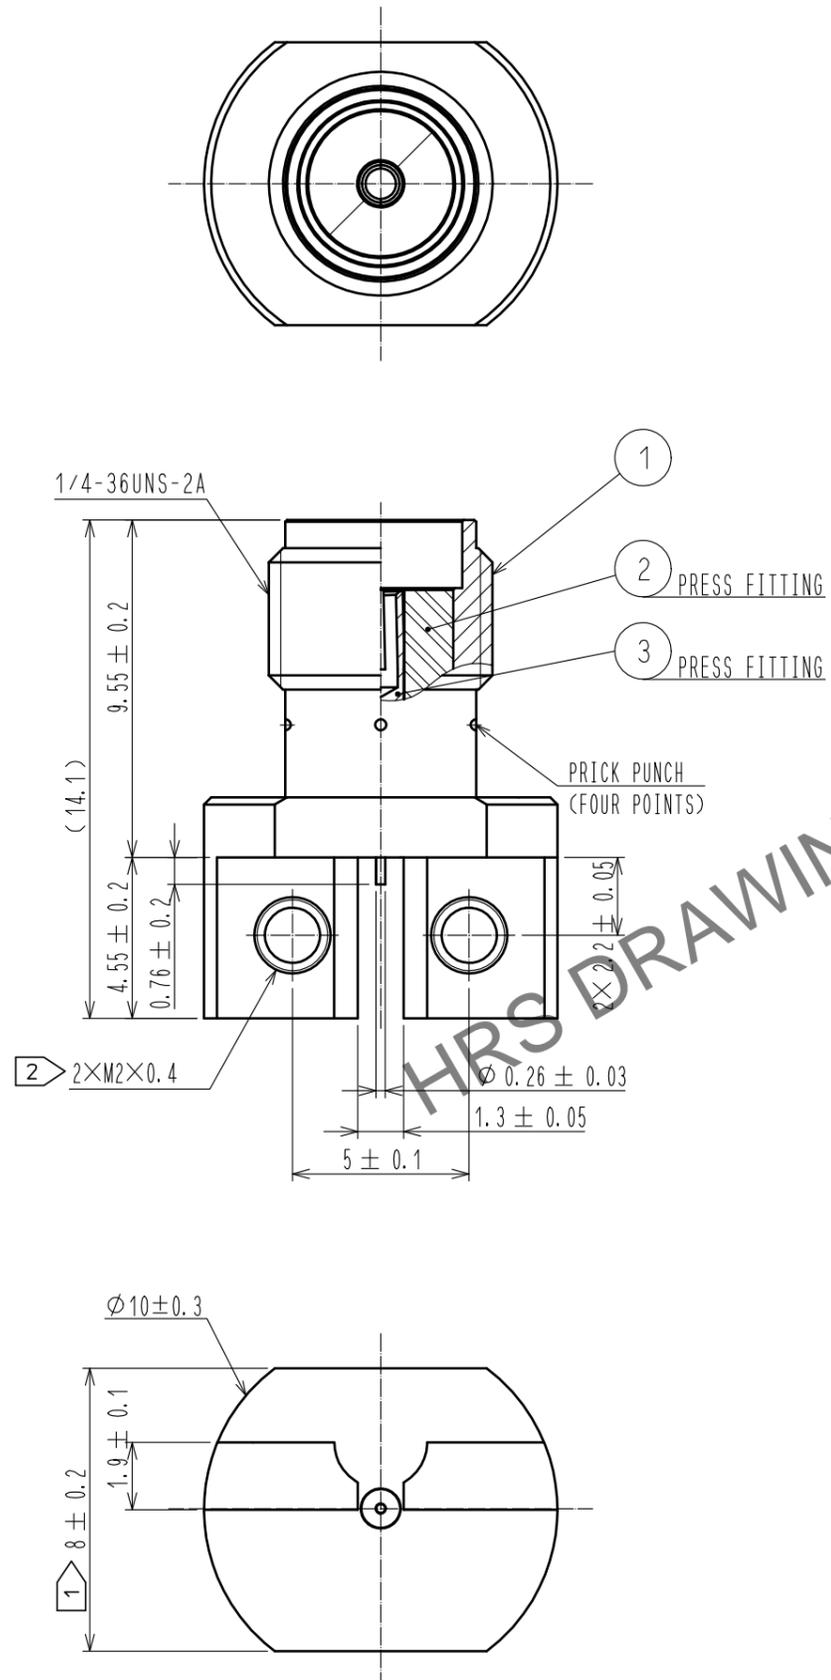


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

Metric screw thread type

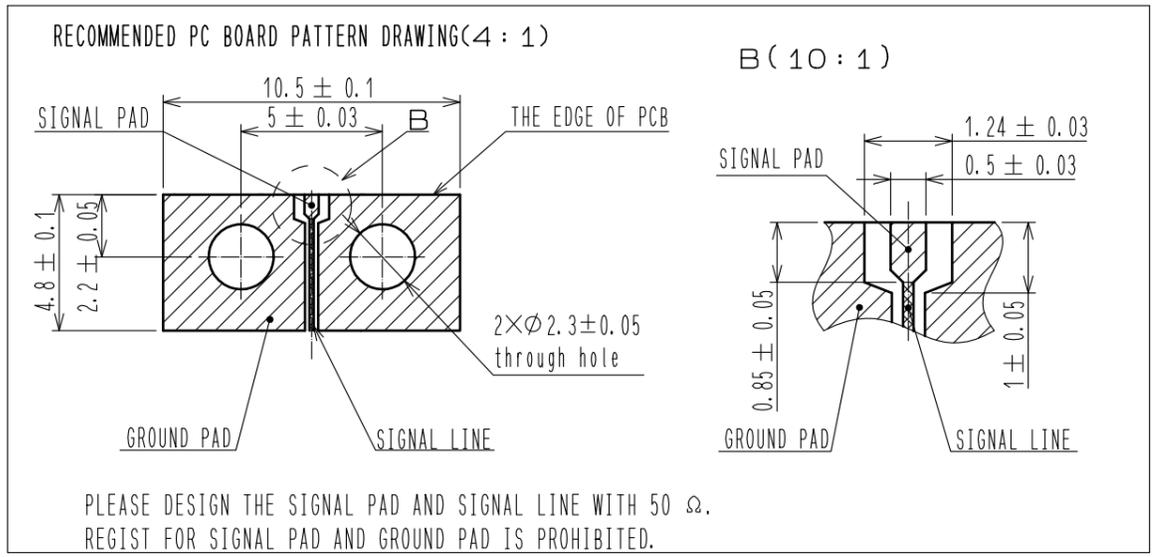

- NOTES
- 1 WHEN THE MATING CONNECTOR, PLEASE HOLD MILLING AREA OF 8 ± 0.2 WITH A WRENCH.
 - 2 $M2 \times 0.4$ SCREW TIGHTENING TORQUE IS $0.18 \text{ N} \cdot \text{m}$
PLEASE TIGHTEN THE SCREWS EVENLY WHEN MOUNTING THE CONNECTORS TO ENSURE STABLE ELECTRICAL CONTACT.
 - 3 PLEASE USE A PCB MOUNTING SCREW OF THE LENGTH OF $L(\text{mm})$.
THE LENGTH OF $L(\text{mm})$ IS PCB THICKNESS $t1(\text{mm})$ + SPRING WASHER THICKNESS $t2(\text{mm})$ + $2(\text{mm})$.
PLEASE USE A SCREW WITH SPRING WASHER.
 - 4 THIS PRODUCT IS A SOLDERLESS MOUNTED CONNECTOR FOR PROTOTYPE EVALUATION OF HIGH SPEED TRANSMISSION BOARDS.
IT IS NOT RECOMMENDED FOR USE IN ACTUAL COMMERCIAL EQUIPMET.

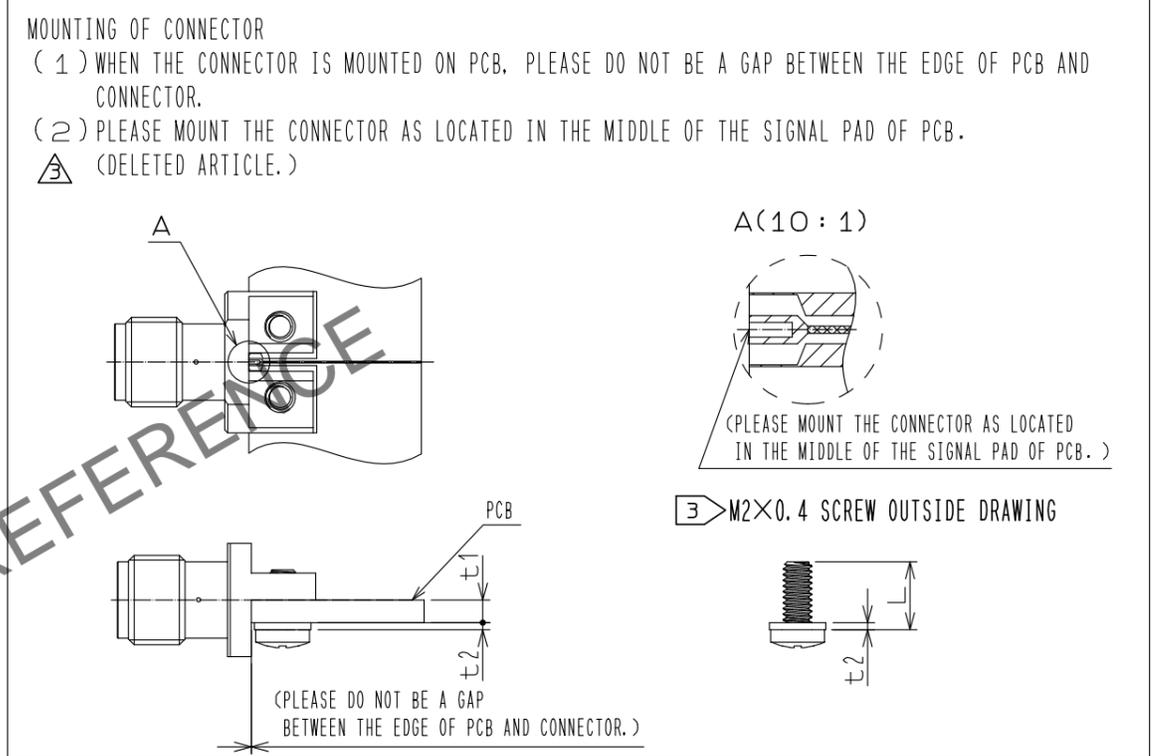

RoHS COMPLIANT

2	PTFE						
1	BRASS	GOLD PLATING	3	BERYLLIUM COPPER	GOLD PLATING		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED
mm		5 : 1	2	DIS-D-00016447		NM. TORIUMI	TS. KANEKO
APPROVED : KY. SHIMIZU		20150117	DRAWING NO.		EDC-339102-00-00		
CHECKED : KY. SHIMIZU		20150117	PART NO.		HRM(G)-300-467B-2		
DESIGNED : RO. YOKOYAMA		20150117	CODE NO.		CL0323-0923-5-00		
DRAWN : RO. YOKOYAMA		20150117					