

Mar. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
2	RE-5-1567	N.J.W	S.H.C	17.02.06	2	RE-5-2935	K.C.J	A.B.H	23.01.11
9	RE-5-1840	K.C.J	A.B.H	17.12.12	2	RE-5-3141	K.G.J	Y.W.S	24.04.05
2	RE-5-2221	K.C.J	A.B.H	19.06.24					

APPLICABLE STANDARD				
RATING	OPERATING TEMPERATURE RANGE	-40°C ~ 85°C (NOTE1)	STORAGE TEMPERATURE RANGE	-10°C TO 60°C(WITH PACKING)
	VOLTAGE	AC 10V	OPERATING OR STORAGE HUMIDITY RANGE	95% MAX (NON-CONDENSING)
	CURRENT	0.5A		

SPECIFICATIONS				
ITEM	TEST METHOD	REQUIREMENTS	QT	AT
CONSTRUCTION				
GENERAL EXAMINATION	VISUALLY AND BY MEASURING INSTRUMENT	ACCORDING TO DRAWING	X	X
MARKING			X	X
ELECTRICAL CHARACTERISTICS				
CONTACT RESISTANCE MILLIVOLT LEVEL METHOD IEC60512-2-1	100mA MAX (DC or 1000Hz)	INITIALLY 100mΩ MAX (NOTE2)	X	-
INSULATION RESISTANCE IEC60512-3-1	MEASURE WITHIN 1 MINUTE AFTER APPLYING 500V DC	INITIALLY 1000MΩ MIN	X	-
VOLTAGE PROOF IEC60512-4-1	500Vrms AC IS APPLIED FOR 1 MINUTE	① NO FLASHOVER OR BREAKDOWN ② CURRENT LEAKAGE 1mA MAX	X	X
MECHANICAL CHARACTERISTICS				
MECHANICAL OPERATION [OFFICE ENVIRONMENT] EIA364B class 1.1	5,000 TIMES INSERTION AND WITHDRAWAL SHALL BE MADE AT THE CYCLE RATE LESS THAN 10 CYCLES PER 1MINUTE NOTE : AFTER EACH 10 CYCLES STOP THE INSERTION AND REST THE CONNECTOR FOR 5 TO 10 MINUTES. CARD SURFACE SHALL BE CLEANED BY AIR BLOW: AT EACH 100 CYCLES INTERVAL(10 TIMES) FROM START TO 1,000 CYCLES. AT EACH 1,000 CYCLES INTERVAL(4 TIMES) FROM 1,001 CYCLES TO 5,000CYCLES.	① CONTACT RESISTANCE: AFTER TEST 50mΩ MAX CHANGE ② NO MECHANICAL DAMAGE SHALL OCCUR ON THE PARTS.	X	-
CARD INSERTION FORCE	MEASURED BY APPLICABLE CARD AT 25±	3 TO 7N (NOTE3)	X	-
CARD EJECTION FORCE	3mm/min			
VIBRATION AND HIGH FREQUENCY IEC60512-6-4	FREQUENCY 10 TO 55 TO 10 Hz/min, SINGLE AMPLITUDE 0.75mm FOR 2h IN X,Y,Z 3 DIRECTIONS, TOTAL 6h	① NO ELECTRICAL DISCONTINUITY OF 1us ② NO MECHANICAL DAMAGE SHALL OCCUR ON THE PARTS.	X	-
SHOCK IEC60512-6-3	ACCELERATION 490m/s ² STANDARD HOLDING TIME 11ms, SEMI-SINE WAVE FOR 3 TIMES IN 3 DIRECTIONS, TOTAL 18 TIMES.	③ CONTACT RESISTANCE AFTER TEST 50mΩ MAXIMUM CHANGE	X	-


REFERENCE DRAWING				
--------------------------	--	--	--	--


REMARKS	DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
(NOTE1) : INCLUDE THE TEMPERATURE RISE BY CURRENT (NOTE2) : CONTACT RESISTANCE INCLUDES CONDUCTOR RESISTANCE UNLESS OTHERWISE SPECIFIED. THE TEST SHOULD BE DONE UNDER TEMP 15 TO 35°C. AIR PRESSURE 86 TO 106kPA, RESLATIVE HUMIDITY 25 TO 85%. (NOTE3) : IT MAY BE CHANGED ACCORDING TO THE TRAY/CARD MATERIAL AND DIMENSIONS.	C.K.KIM 14.06.30	C.K.KIM 14.06.30	C.K.KIM 14.06.30	H.C.SONG 14.06.30	<div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 40px; margin: 0 auto;"> ENG 24.04.11 DEPT </div>

NOTE QT: QUALIFICATION TEST AT: ASSURANCE TEST X: APPLICABLE TEST				
HIROSE KOREA CO.,LTD.		SPECIFICATION SHEET		PART NO. KP13B-SF-PEJ(800)
CODE NO.(OLD) CL	DRAWING NO. ELC4-631768	CODE NO. CL 6530-0002-9-800	1 2	

Mar.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

SPECIFICATIONS

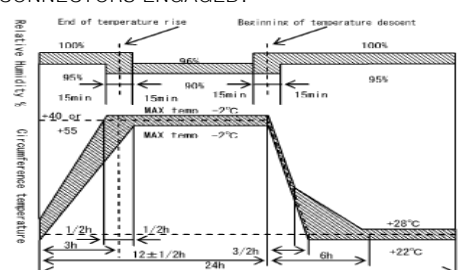ITEM	TEST METHOD	REQUIREMENTS	QT	AT
ENVIRONMENTAL CHARACTERISTICS				
DAMP HEAT CYCLE IEC60512-11-12	10 CYCLES(1CYCLE=24HOURS)WITH CONNECTORS ENGAGED. 		X	-
RAPID CHANGE OF TEMPERATURE IEC60512-11-4	5 CYCLES(1CYCLE=1HOUR) WITH CARD MATED CONDITION (TEMPERATURE : -55°C TO 85°C, RELOCATION TIME TO CHAMBER : WITHIN 5MIN)	① CONTACT RESISTANCE : AFTER TEST 50mΩ MAX CHANGE	X	-
DRY HEAT IEC60512-11-9	EXPOSED AT 85°C FOR 96 HOURS WITH CARD MATED CONDITION	② INSULATION RESISTANCE : AFTER TEST 100MΩ MIN	X	-
COLD IEC60512-11-10	EXPOSED AT -40°C FOR 96 HOURS WITH CARD MATED CONDITION	③ NO MECHANICAL DAMAGE OR HEAVY CORROSION SHALL OCCUR ON THE PARTS.	X	-
DAMP HEAT STEADY STATE IEC60512-11-3	EXPOSED AT 40°C, 90 TO 95%RH, 96 HOURS WITH CARD MATED CONDITION		X	-
HYDROGEN SULPHIDE JEIDA 38	EXPOSED IN 3 PPM HYDROGEN SULPHIDE, APPROX. 40°C, 80%RH, 96HOURS WITH CARD MATED CONDITION		X	-
CORROSION SALT MIST IEC60068-2-11	EXPOSED AT 35±2°C, 5% SALT WATER SPRAY FOR 48Hr		X	-
RESISTANCE TO SOLDERING HEAT	SEE THE FOLLOWING CONDITION, NUMBER OF CYCLE 1 TIME (NOTE4)	NO MECHANICAL DAMAGE OR HEAVY CORROSION SHALL OCCUR ON THE PARTS.	X	-

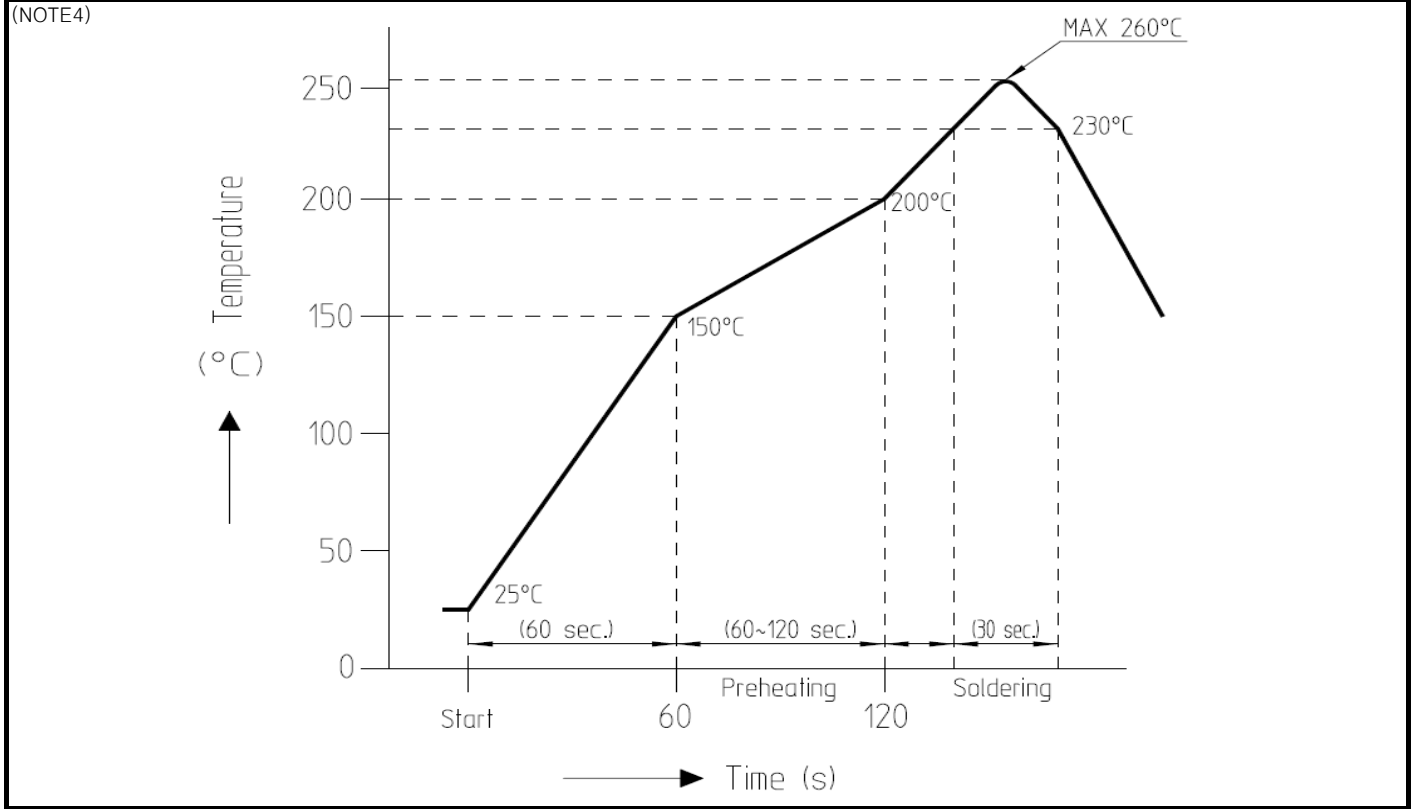

REFERENCE DRAWING

NOTE QT: QUALIFICATION TEST AT: ASSURANCE TEST X: APPLICABLE TEST				
HIROSE KOREA CO.,LTD.	SPECIFICATION SHEET	PART NO. KP13B-SF-PEJ(800)		
CODE NO.(OLD) CL	DRAWING NO. ELC4-631768	CODE NO. CL 6530-0002-9-800	2	2