

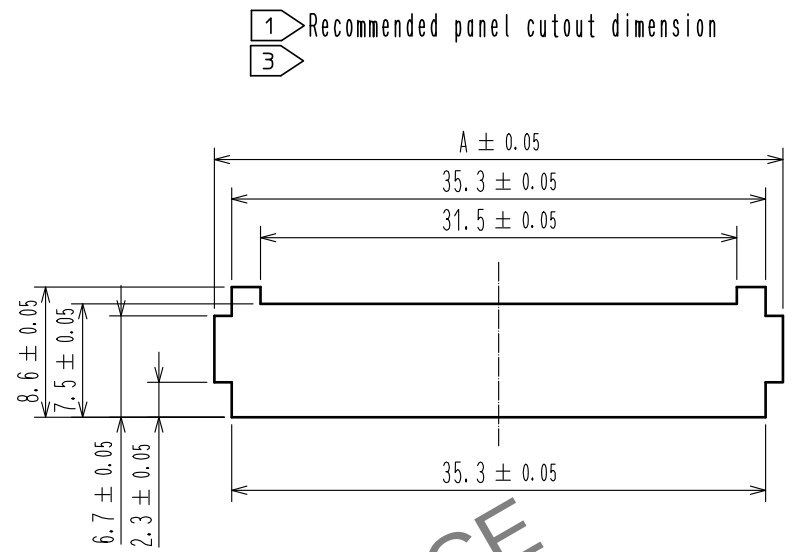
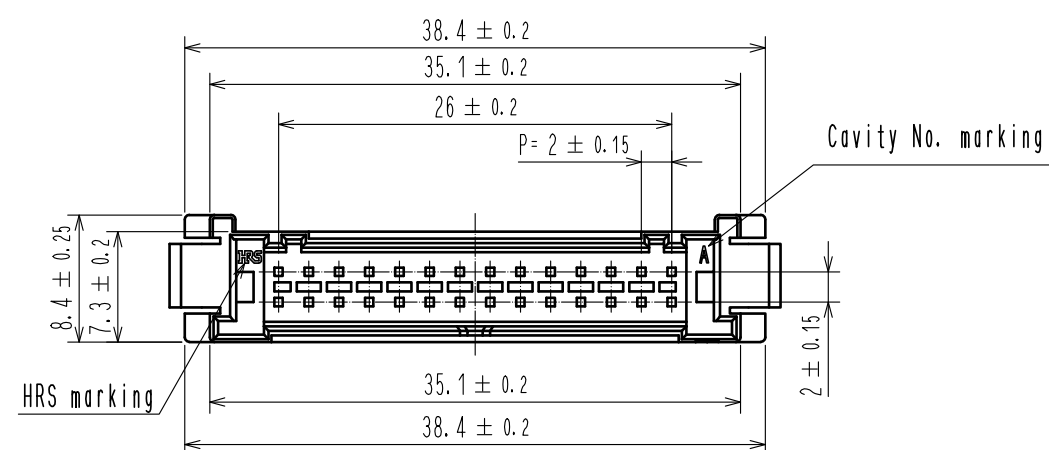
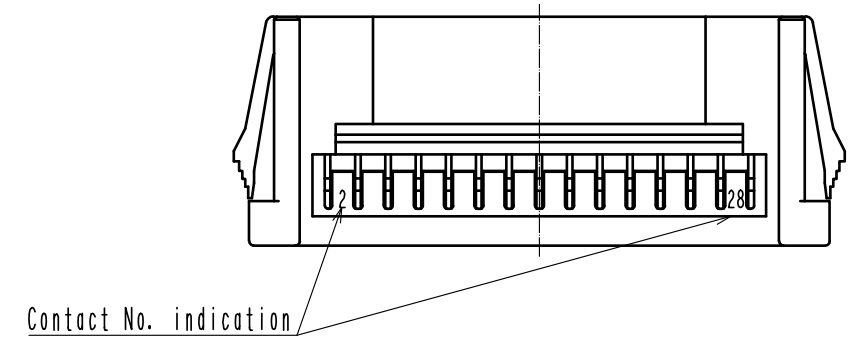


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.




Panel thickness	A
0.5~0.8	37.6
0.9~1.3	38.1
1.4~1.8	38.5
1.9~2.3	38.9

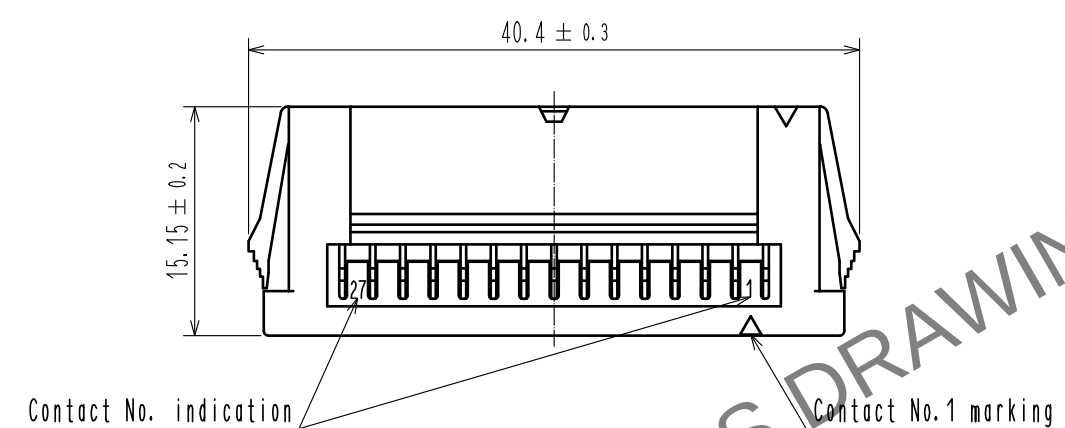

- Note
- 1 Please use non-radius side for the panel hooking area.
 - 2 Applicable panel thicknessing is 2.3 to 0.5 mm.
 - 3 Consult hirose for the other panel cutout designs than recommended one.
 - 4. Per pack : 100 pieces.
 - 5. UL(File No.E52653),
C-UL(File No.E52653) authorization article



NO.		MATERIAL		FINISH . REMARKS				1		PBT		UL94V-0. BLACK							
NO.		MATERIAL		FINISH . REMARKS				NO.		MATERIAL		FINISH . REMARKS							
UNITS mm				SCALE 2 : 1				COUNT 1		DESCRIPTION OF REVISIONS DIS-H-00004547				DESIGNED TS.MIYAKI		CHECKED SZ.ONO		DATE 20181225	
 HIROSE ELECTRIC CO., LTD.				APPROVED : HS. OKAWA				20160601		DRAWING NO.		EDC-366294-00-00							
				CHECKED : YN. TAKASHITA				20160601		PART NO.		DF51-28DEP-2C							
				DESIGNED : TT. OHSAKO				20160601		CODE NO.		CL543-5083-0-00							
				DRAWN : TT. OHSAKO				20160601				 1 / 1							