

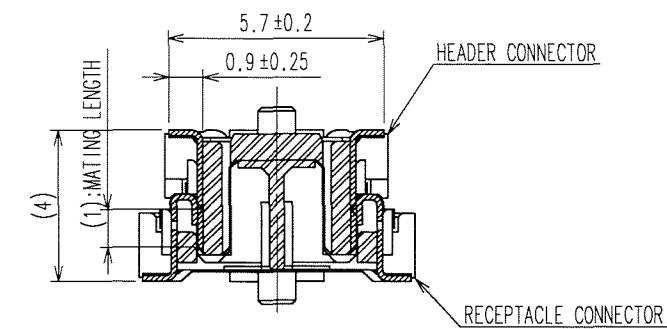

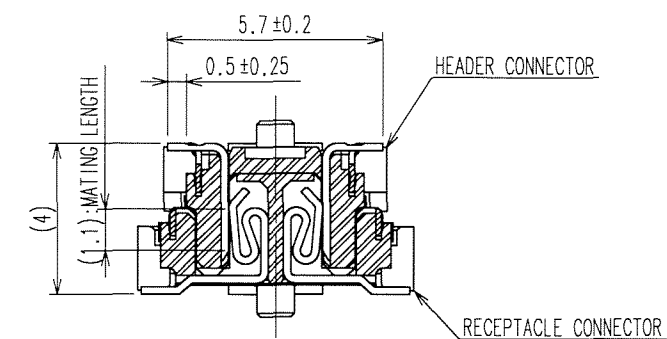



	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE		COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△					. .	△					. .
△					. .	△					. .
△					. .	△					. .

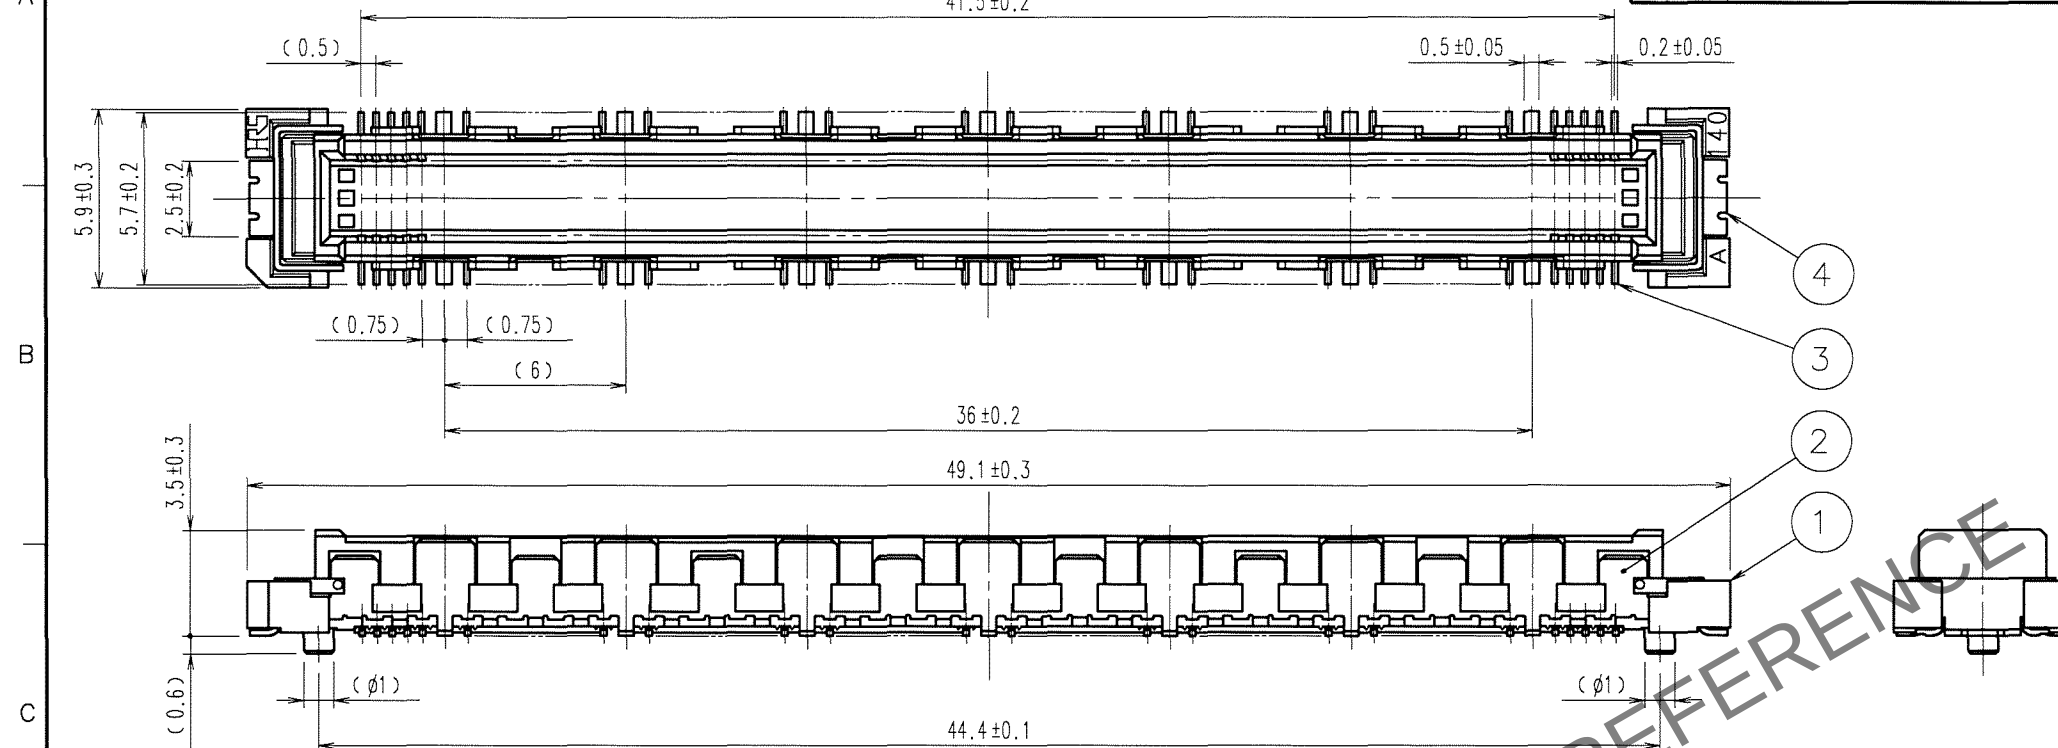


RECOMMENDED LAND PATTERN DIMENSION OF POE

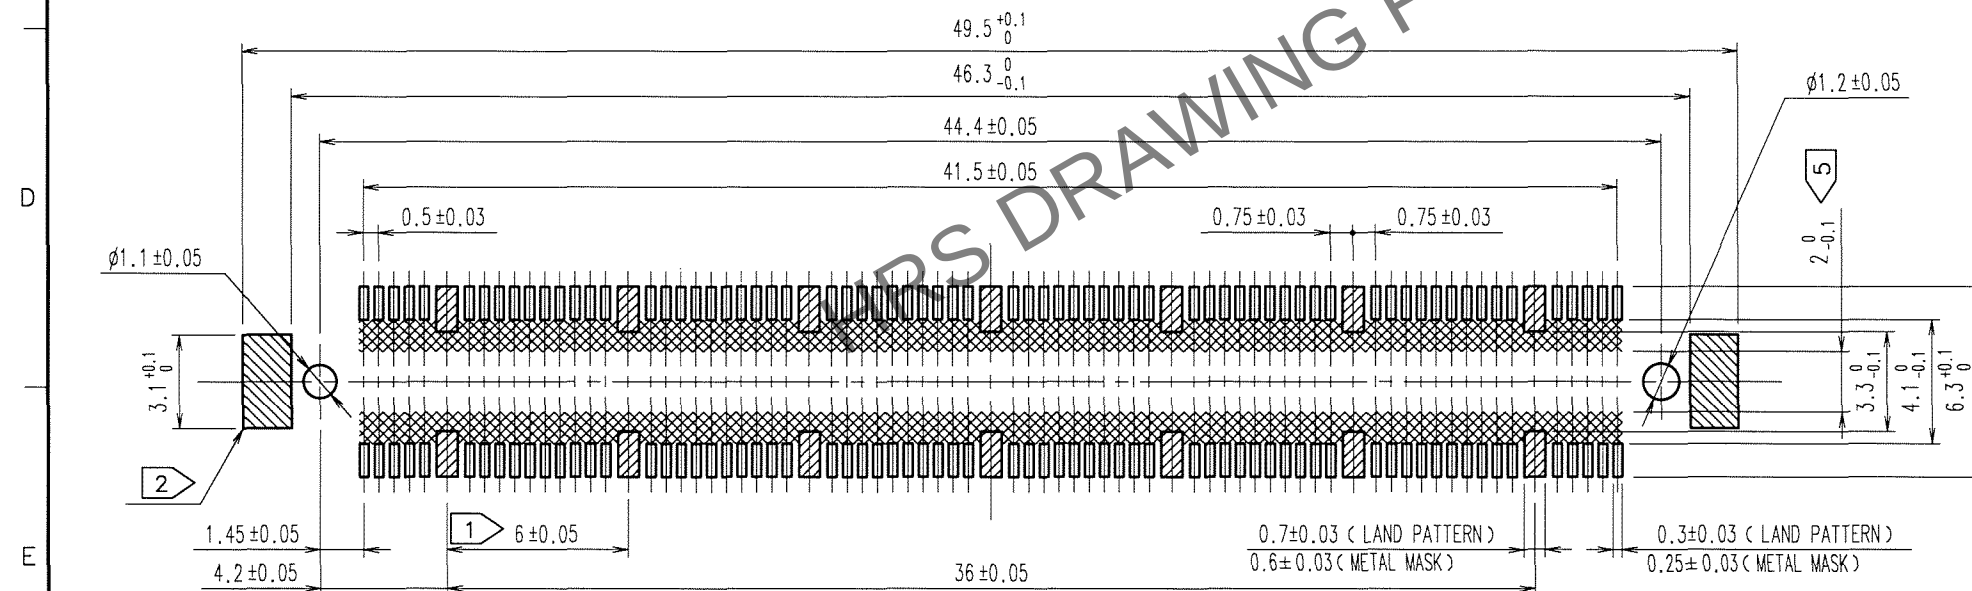

NOTES

- 1 14 HATCHED  PARTS:GROUND CIRCUIT.
- 2 2 HATCHED  PARTS:GROUND CIRCUIT.
- 3 SMT LEAD-COPLANARITY:0.1 MAX.
- 4 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
- 5 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND,OR LEAD MAY TOUCH PATTERN.(THIS APPLIES TO HATCHED  AREA.)
- 6 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

2	PHOSPHOR BRONZE	TIN-PLATING	3	PHOSPHOR BRONZE	LEAD AREA : TIN-PLATING 1μm min.
1	LCP	BEIGE UL94V-0			UNDER PLATING : NICKEL 1μm min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL		DRAWN A. SUZUKAWA 06.12.01	DESIGNED <i>H Nakamura</i> 06.12.01	CHECKED <i>K. Ogawa</i> 06.12.04	APPROVED <i>H. Okawa</i> 06.12.04	RELEASED . .
 SCALE 4 : 1 UNITS mm		DRAWING NO. EDC3-151947-25		PART NO. FX10A-140P/12-SV(71)		
 HIROSE ELECTRIC CO., LTD		CODE NO. CL570-0004-3-71				1/1

TO
PCK