

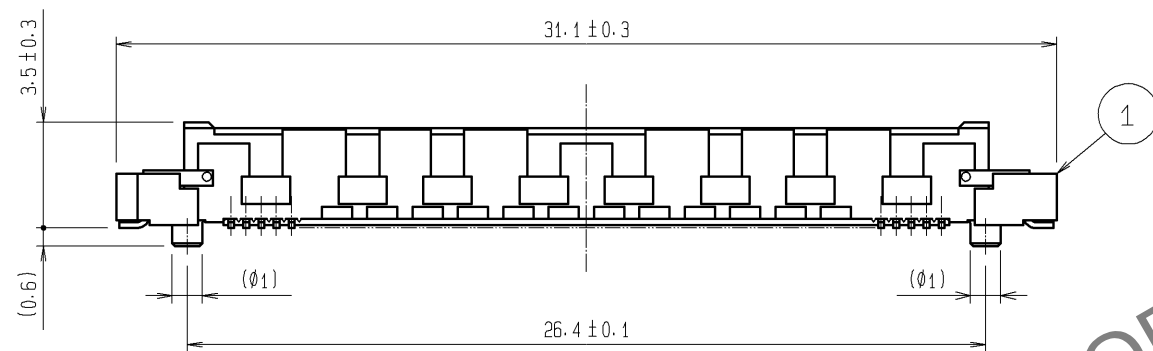



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

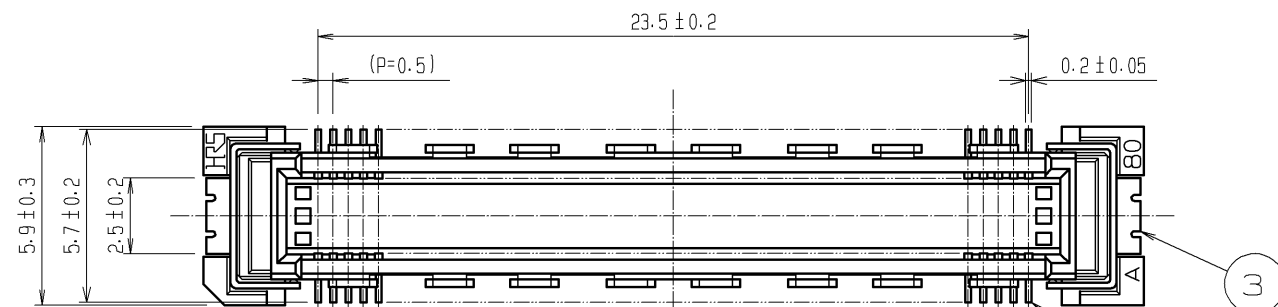


RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

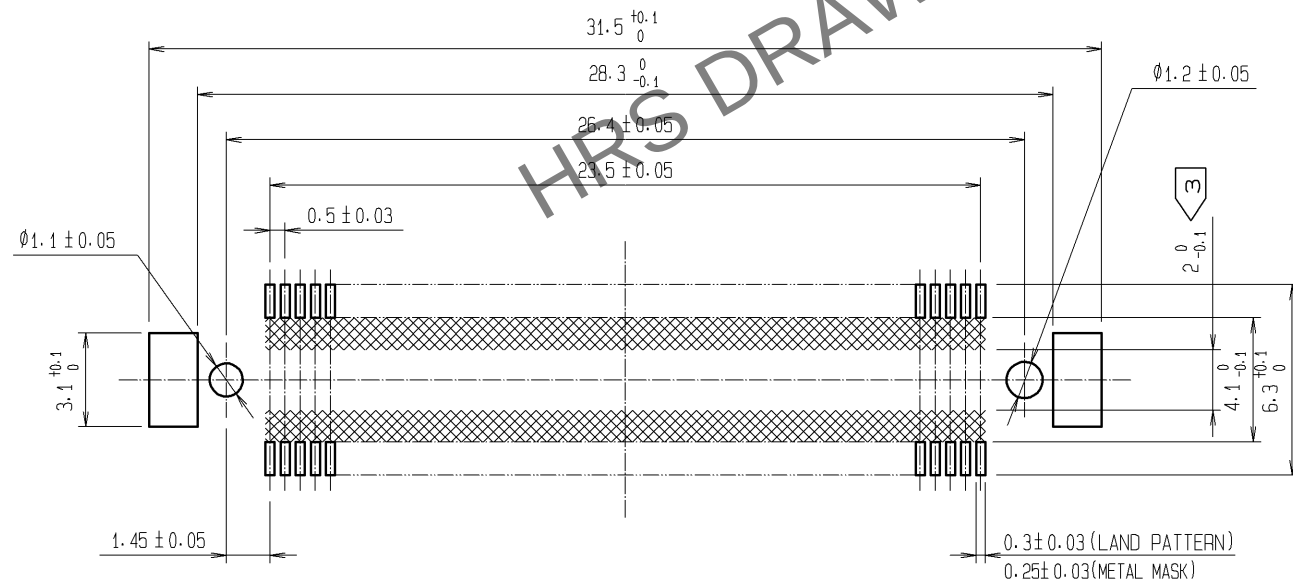

- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

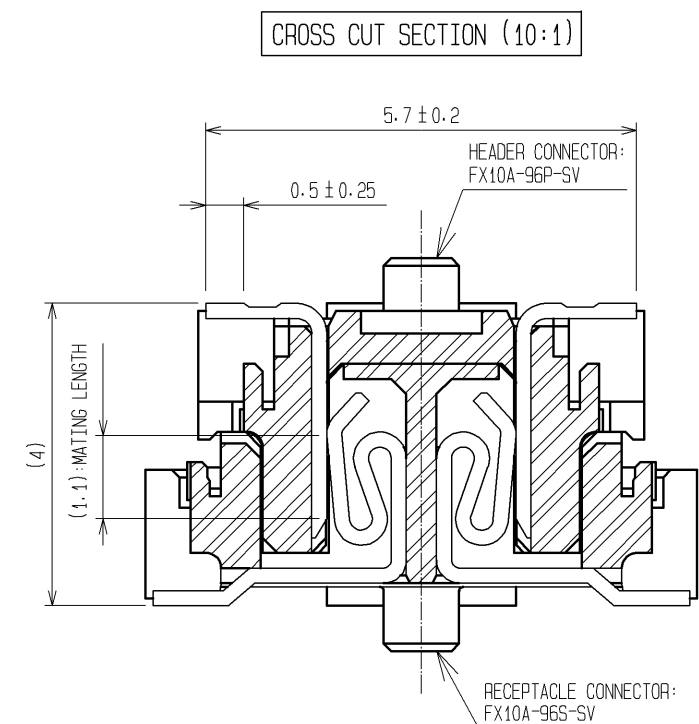

				3	PHOSPHOR BRONZE	TIN-PLATING					
				2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.					
						LEAD AREA:TIN-PLATING 1μm min.					
						UNDER PLATING:NICKEL 1μm min.					
1	LCP	BEIGE UL94V-0									
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS					
UNITS mm				SCALE 4 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		08.07.23		DRAWING NO.		EDC3-151952-25			
		CHECED : HT. YAMAGUCHI		08.07.23		PART NO.		FX10A-96P-SV (71)			
		DESIGNED : SY. KAMIGA		08.07.22		CODE NO.		CL570-0041-0-71			
		DRAWN : HK. SUNADORI		08.07.22				 1/1			