

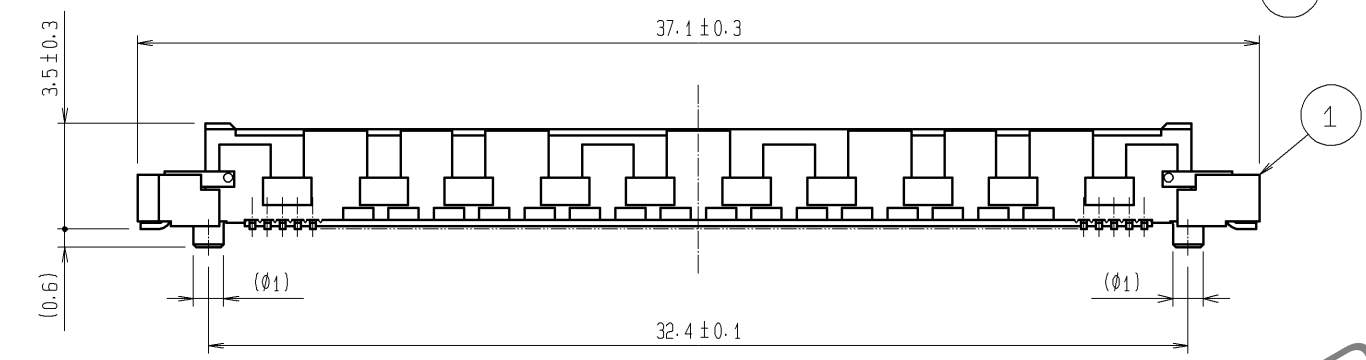
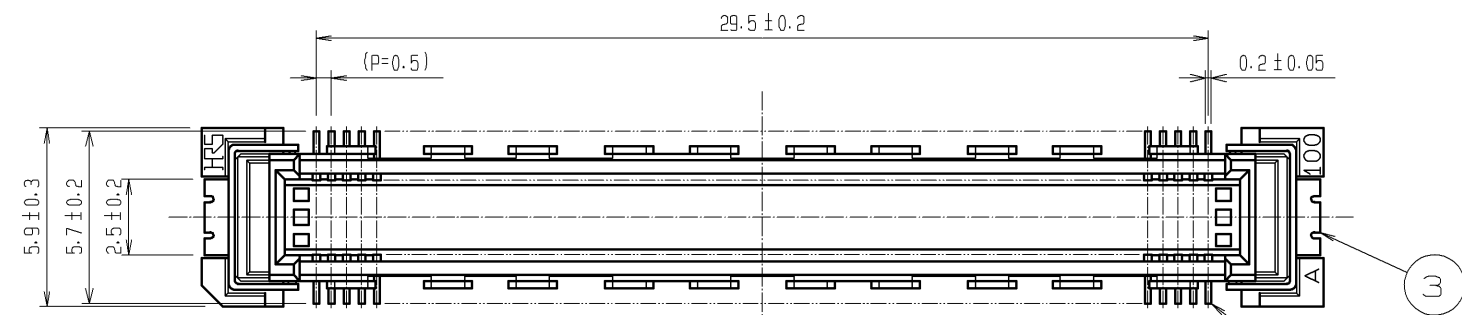


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

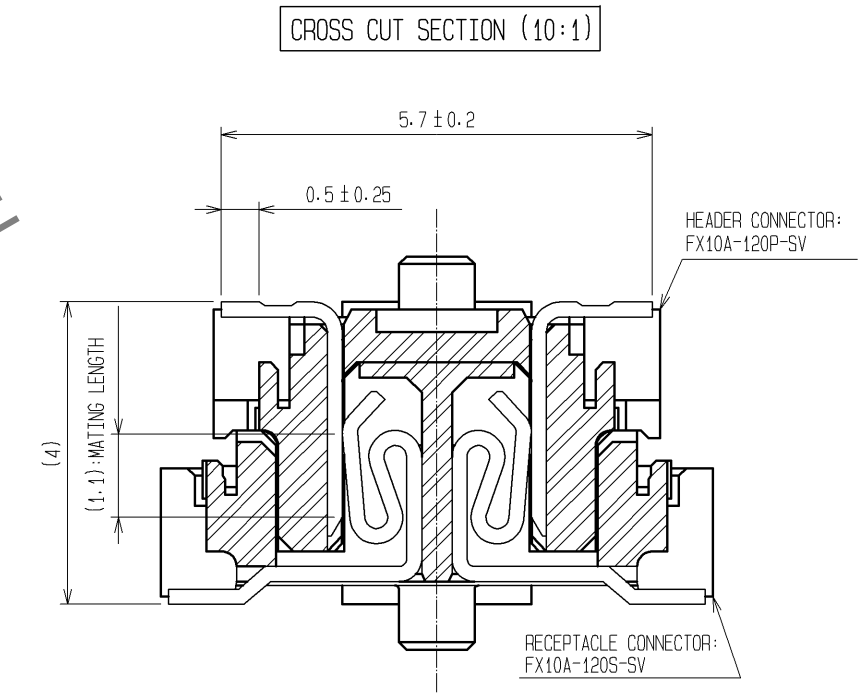

RECOMMENDED LAND PATTERN DIMENSION OF PCB
(RECOMMENDED METAL MASK THICKNESS: 0.15mm)

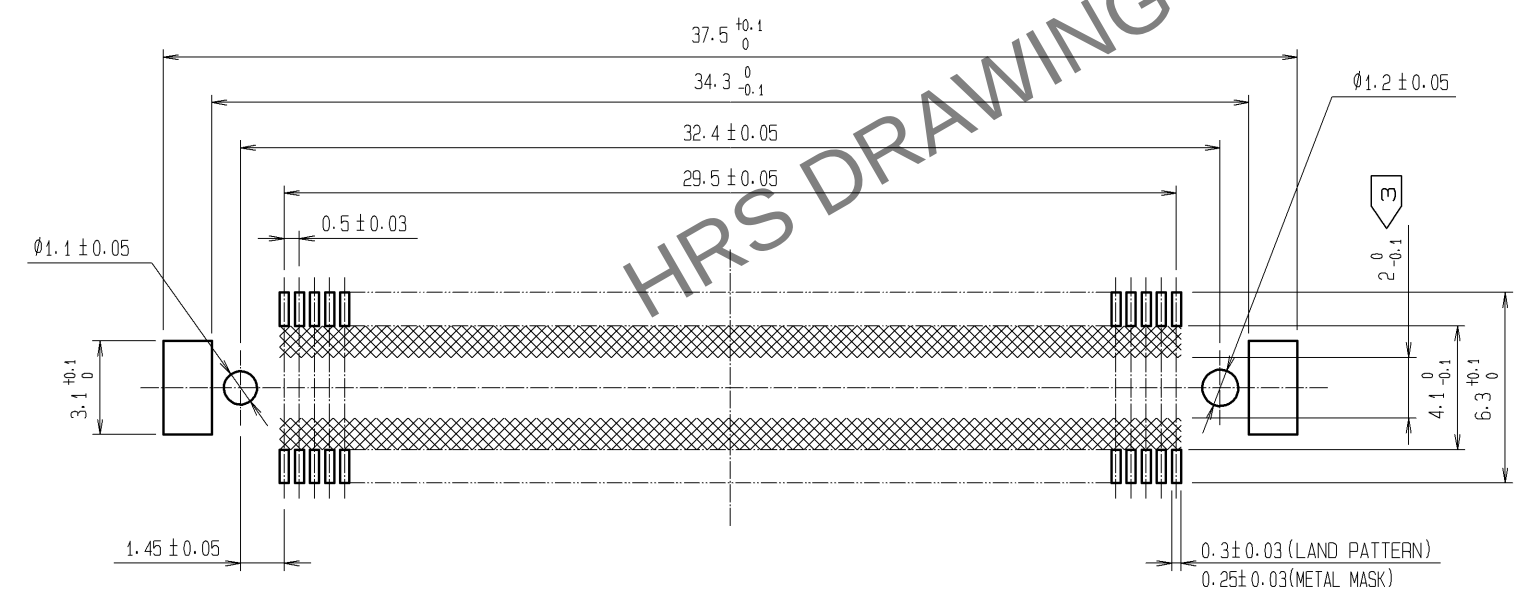

- NOTES
- 1 SMT LEAD-COPLANARITY: 0.1 MAX.
 - 2 THIS PRODUCT HAS NO POLARITY TO PATTERN FOR MOUNTING.
 - 3 MAKE SURE WIDTH OF PATTERN IS WITHIN THAT OF LAND, OR LEAD MAY TOUCH PATTERN. (THIS APPLIES TO HATCHED AREA.)
 - 4 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

				3	PHOSPHOR BRONZE	TIN-PLATING							
				2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.1μm min.							
						LEAD AREA:TIN-PLATING 1μm min.							
							UNDER PLATING:NICKEL 1μm min.						
1	LCP	BEIGE			UL94V-0								
NO.	MATERIAL		FINISH ,			REMARKS			NO.	MATERIAL	FINISH ,	REMARKS	
UNITS mm				SCALE 4 : 1		COUNT	DESCRIPTION OF REVISIONS			DESIGNED		CHECKED	DATE
HIROSE ELECTRIC CO., LTD.				APPROVED : HS. OKAWA		09. 04. 14		DRAWING NO.		EDC3-151953-25			
				CHECED : HT. YAMAGUCHI		09. 04. 14		PART NO.		FX10A-120P-SV (71)			
				DESIGNED : SY. KAMIGA		09. 04. 14		CODE NO.		CL570-0042-2-71			
				DRAWN : HK. SUNADORI		09. 04. 13							