

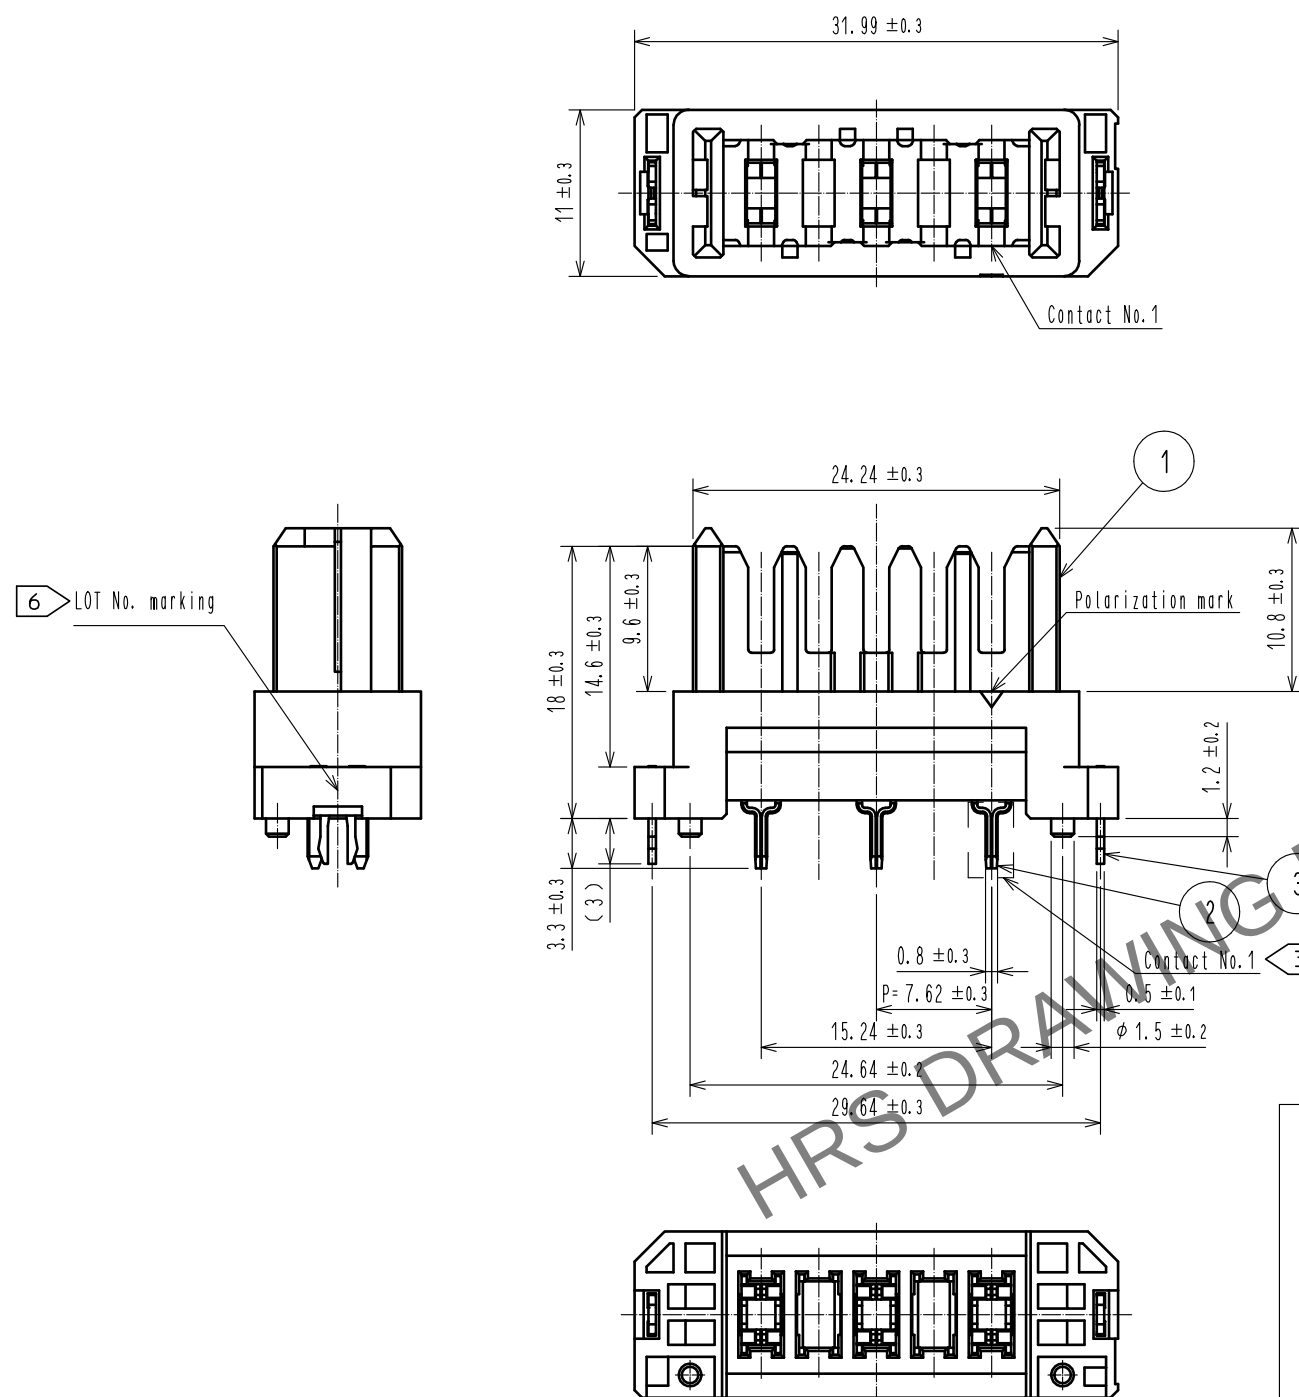
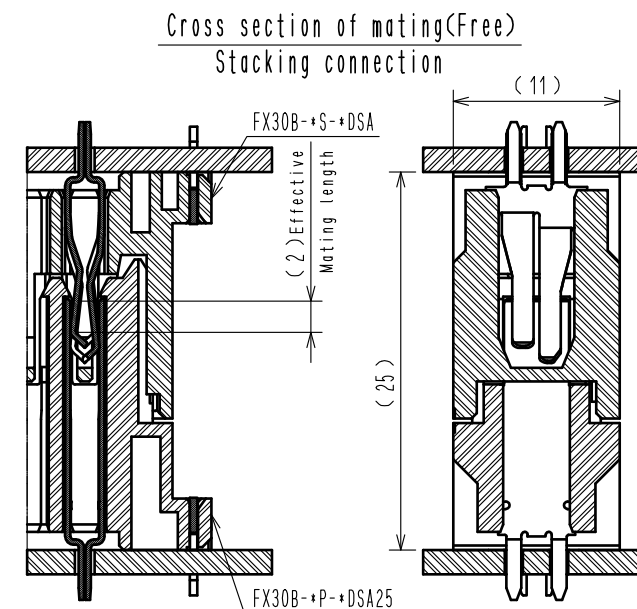


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

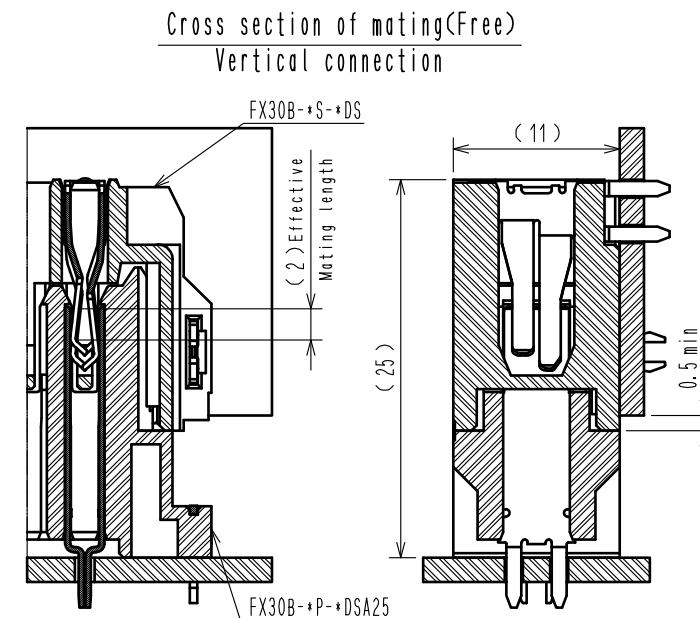

- Note
- 1 This product is packaged in tray. (35 pcs/tray)
 - 2 Blemish and hit mark can be occurred through out the manufacturing process which doesn't affect quality level. Also, black spot could be observed on the surface of housing.
 - 3 For the contact No., adjacent two pairs of leads placed back-to-back (4 leads in total) compose one line.
 - 4 Misalignment absorbing range: ± 0.3 mm max.
 - 5 The dimension in parentheses are for references.
 - 6 Lot No. is indicated at either one of the position as shown.
 - 7 UL (File No. E52653)
C-UL (File No. E52653)
TUV (Certificate No. R50275872) authorization article.



2	Copper alloy	Contact area:Gold-plating 0.1㎍m		4	Polystyrene						
		Lead area:Tin-plating 1.0㎍m									
		Under plating:Nickel 1.0㎍m									
1	Polyamide	Black UL94V-0		3	Phosphor bronze	Tin-plating 3.0㎍m					
						Under plating:Nickel 1.0㎍m					
NO.	MATERIAL	FINISH . REMARKS			NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-F-00006019		DESIGNED AK. IWAHORI	CHECKED HT. YAMAGUCHI	DATE 20200406
 HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA		20140912		DRAWING NO. EDC3-359160-00					
		CHECKED : KN. SHIBUYA		20140912		PART NO. FX30B-3P-7. 62DSA25					
		DESIGNED : DK. AIMOTO		20140912		CODE NO. CL570-3206-4-00					
		DRAWN : DK. AIMOTO		20140912		 					

