
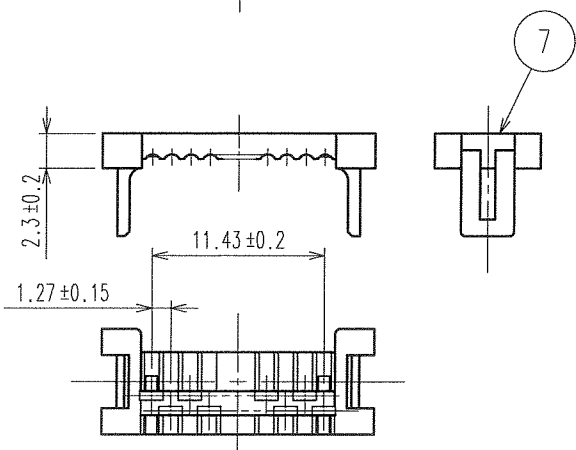
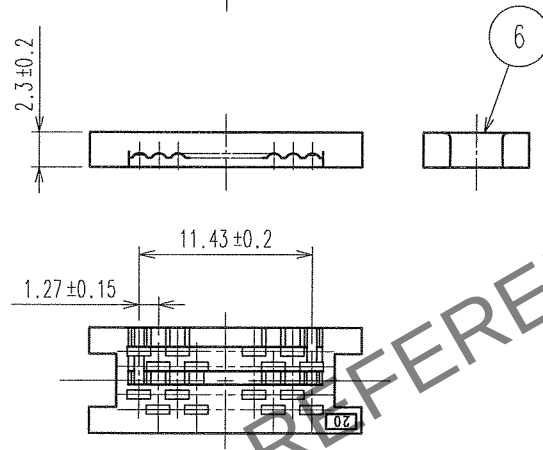
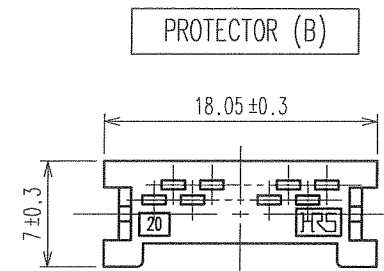
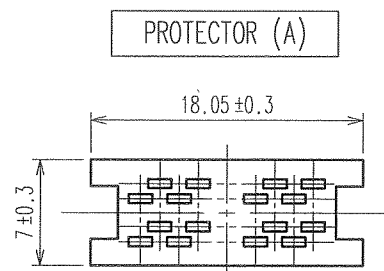


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

1 2 3 4 5 6 7 8

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
△				..	△				..
△				..	△				..
△				..	△				..

A
B
C
D
E
F

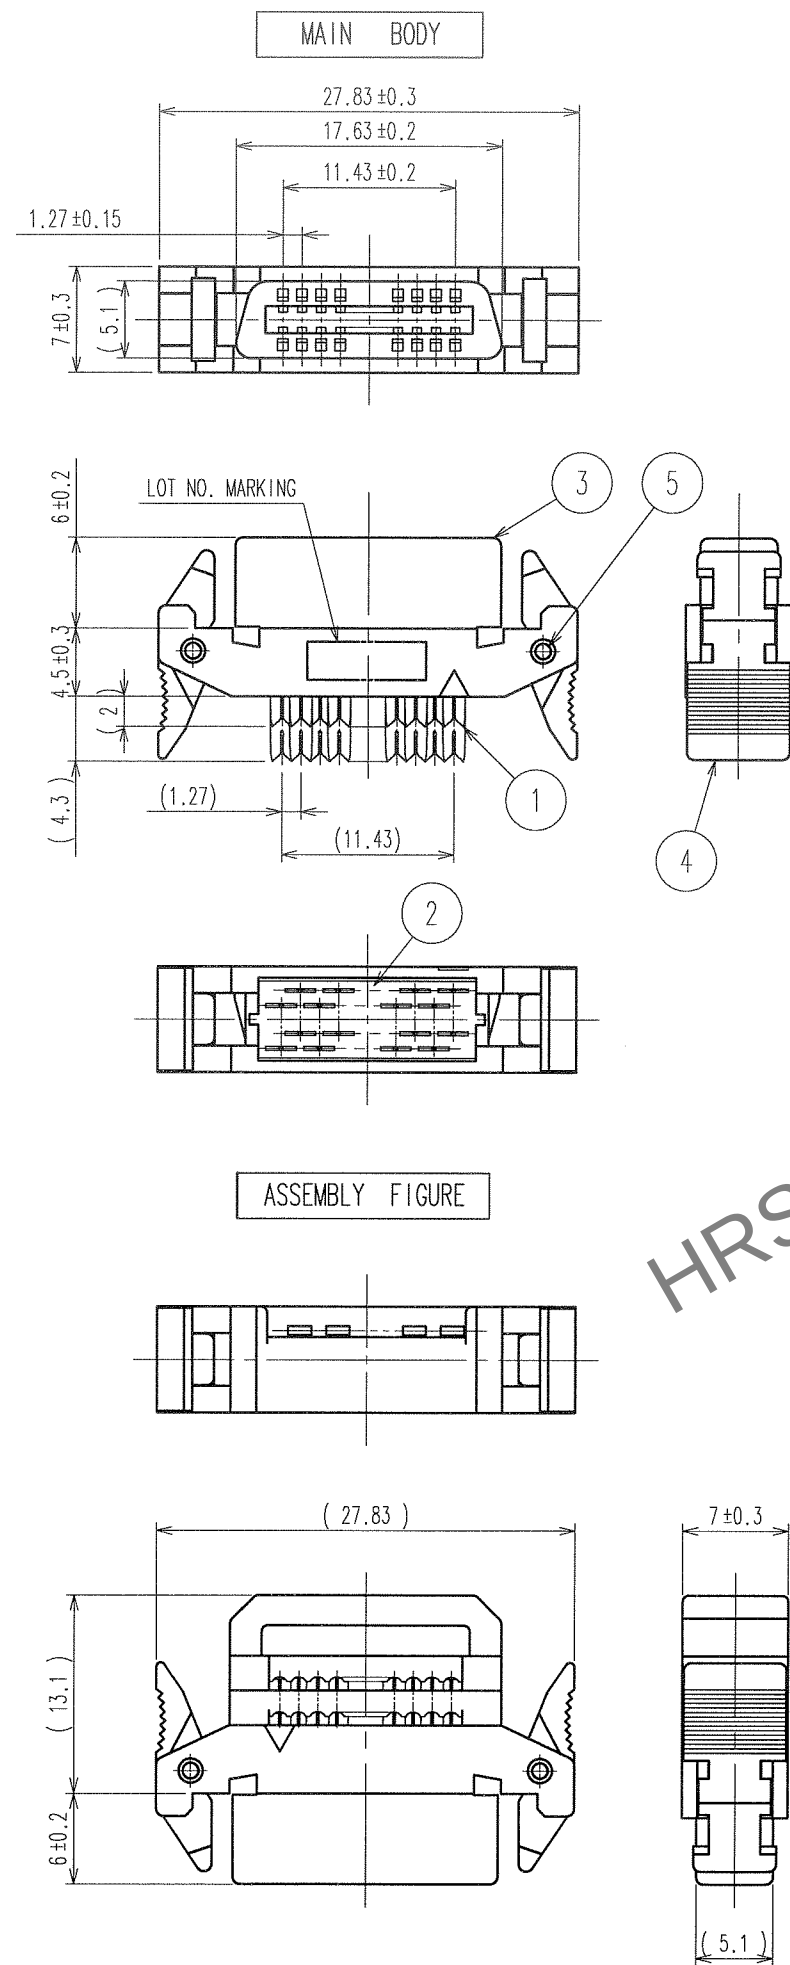

NOTE 1 COMPONENTS OF REF. NO.6~8 ARE APPENDED PRODUCTS.
2 THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

8	PA	BLACK UL94V-0
6,7	PBT	BLACK UL94V-0
5	STAINLESS STEEL	
2~4	PBT	BLACK UL94V-0
1	PHOSPHOR BRONZE	CONTACT AREA:GOLD FLASH UNDER PLATING:NICKEL 1μm min.
NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD) CL	DRAWN A. SUZUKAWA 06.05.18	DESIGNED <i>A. Nakamura</i> 06.05.20	CHECKED <i>(Signature)</i> 06.05.20	APPROVED <i>H. Okawa</i> 06.05.20	RELEASED ..
SCALE 2:1 UNITS mm	DRAWING NO. EDC3-150610 HRS HIROSE ELECTRIC CO., LTD	PART NO. FX2B-20SA-1.27R	CODE NO. CL572-0621-2	1/1	

TO
PCK

1 2 3 4 5 6 7 8