




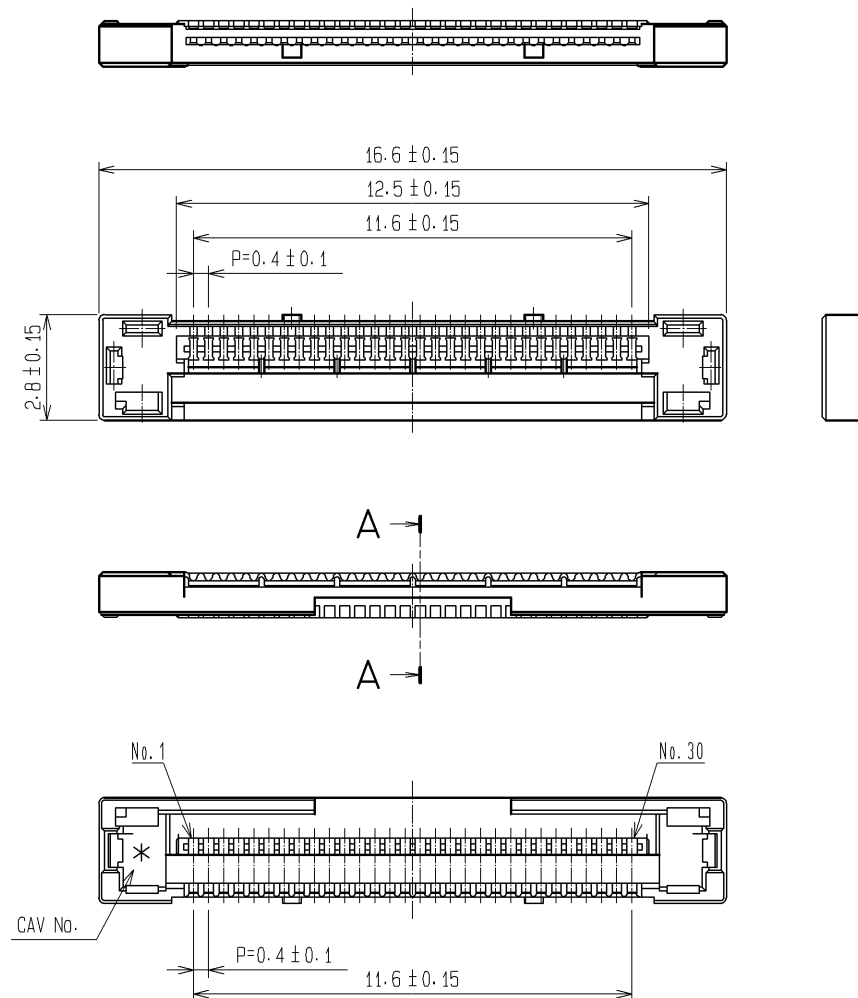


RECOMMENDED CABLE SUBASSEMBLY

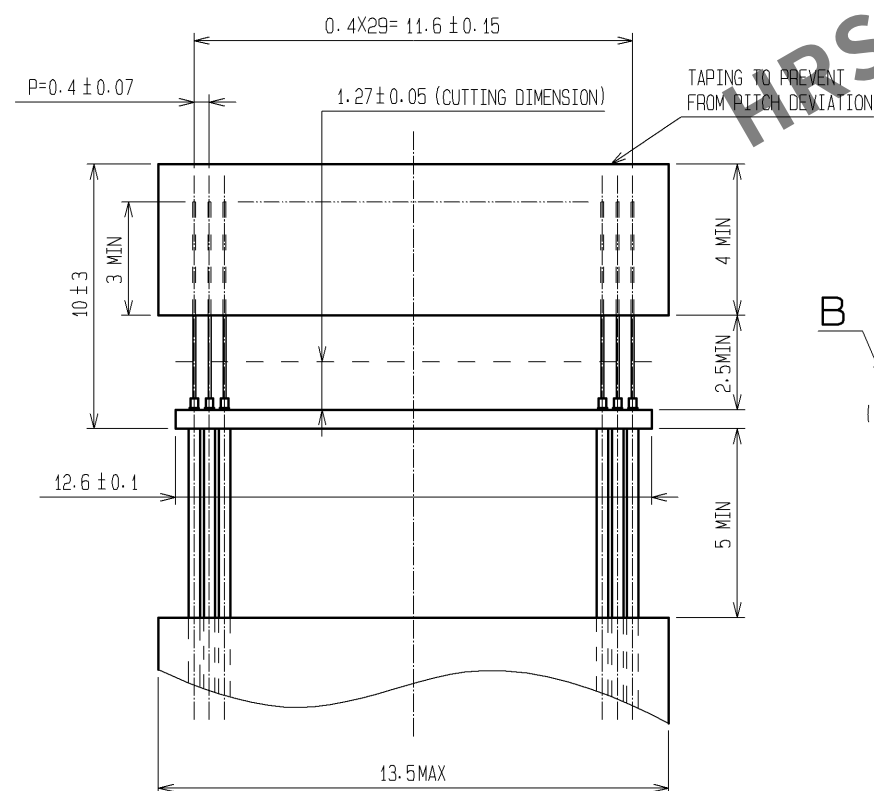


B (FREE)

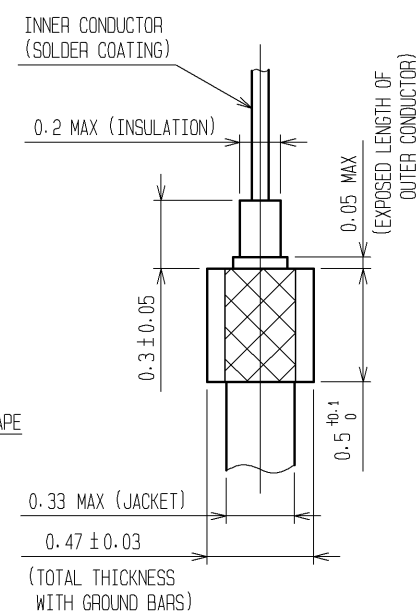

A-A (FREE)

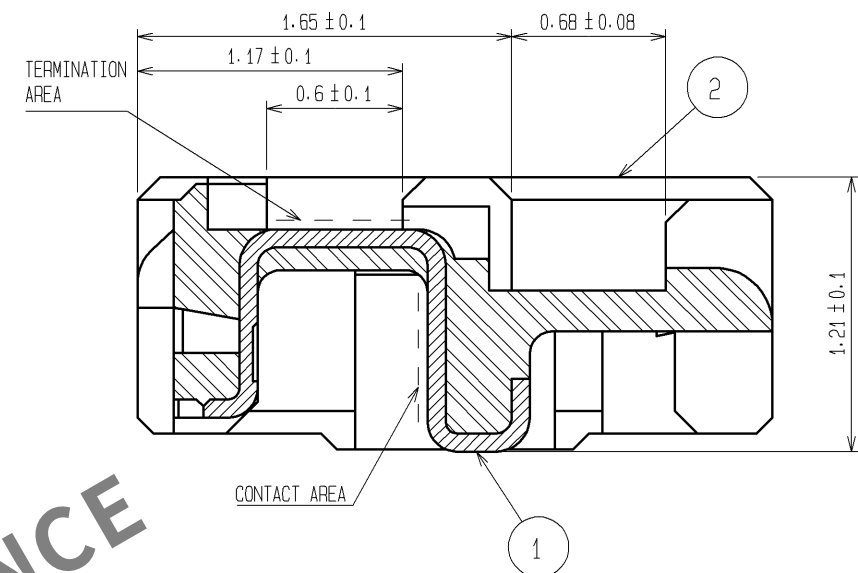


CABLE TERMINATION FIGURE(FREE)

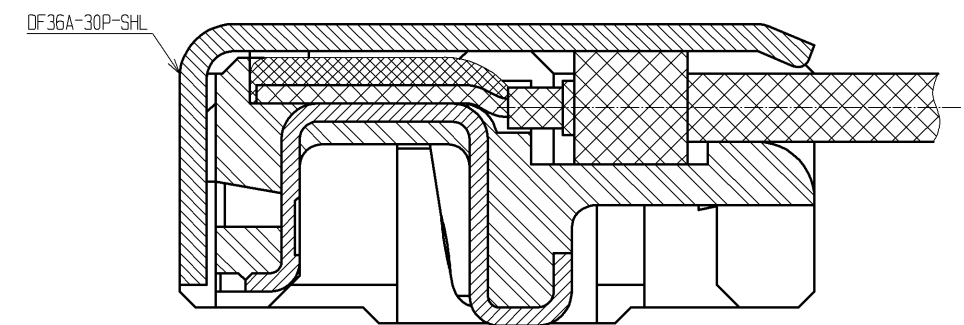

- NOTES 1. APPLICABLE CABLE: THIN COAXIAL CABLE (AWG#42-AWG#46)
2. THIS CONNECTOR IS NOT HOT PLUGGABLE. MATE AND UNMATE WHILE THE POWER IS OFF.
3. THE ASSEMBLY IS COMPLETED BY COMBINING TWO PARTS 'CONNECTOR UNIT AND METAL SHIELDING'.
REFER TO THE TABLE FOR EACH ITEM No., PART NAME, PART No. AND CODE No.

ITEM No.	PART NAME	PART No.	CODE No.
1, 2	CONNECTOR UNIT	DF36-30P-0.4SD(55)	CL662-4018-3-55
-	METAL SHIELDING	DF36A-30P-SHL	CL662-4019-6-00

			5	PS	BLACK			
			4	POLYESTER	CLEAR			
1	PHOSPHOR BRONZE	CONTACT AREA : GOLD PLATING 0.1μm min TERMINATION AREA : GOLD PLATING 0.1μm min UNDER PLATING : NICKEL PLATING 1μm min	3	PS	CLEAR			
			2	LCP	UL94V-0 . BLACK			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE	COUNT		DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
		5 : 1						
 HIROSE ELECTRIC CO., LTD.	APPROVED : MH. YAMANE		14. 05. 27		DRAWING NO. EDC3-315347-03			
	CHECKED : MH. TSUCHIDA		14. 05. 27		PART NO. DF36-30P-0. 4SD<55>			
	DESIGNED : AH. MIYAZAKI		14. 05. 26		CODE NO. CL662-4018-3-55			
	DRAWN : AH. MIYAZAKI		14. 05. 26					
								

HRS HIROSE ELECTRIC CO., LTD.

