


Jan.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

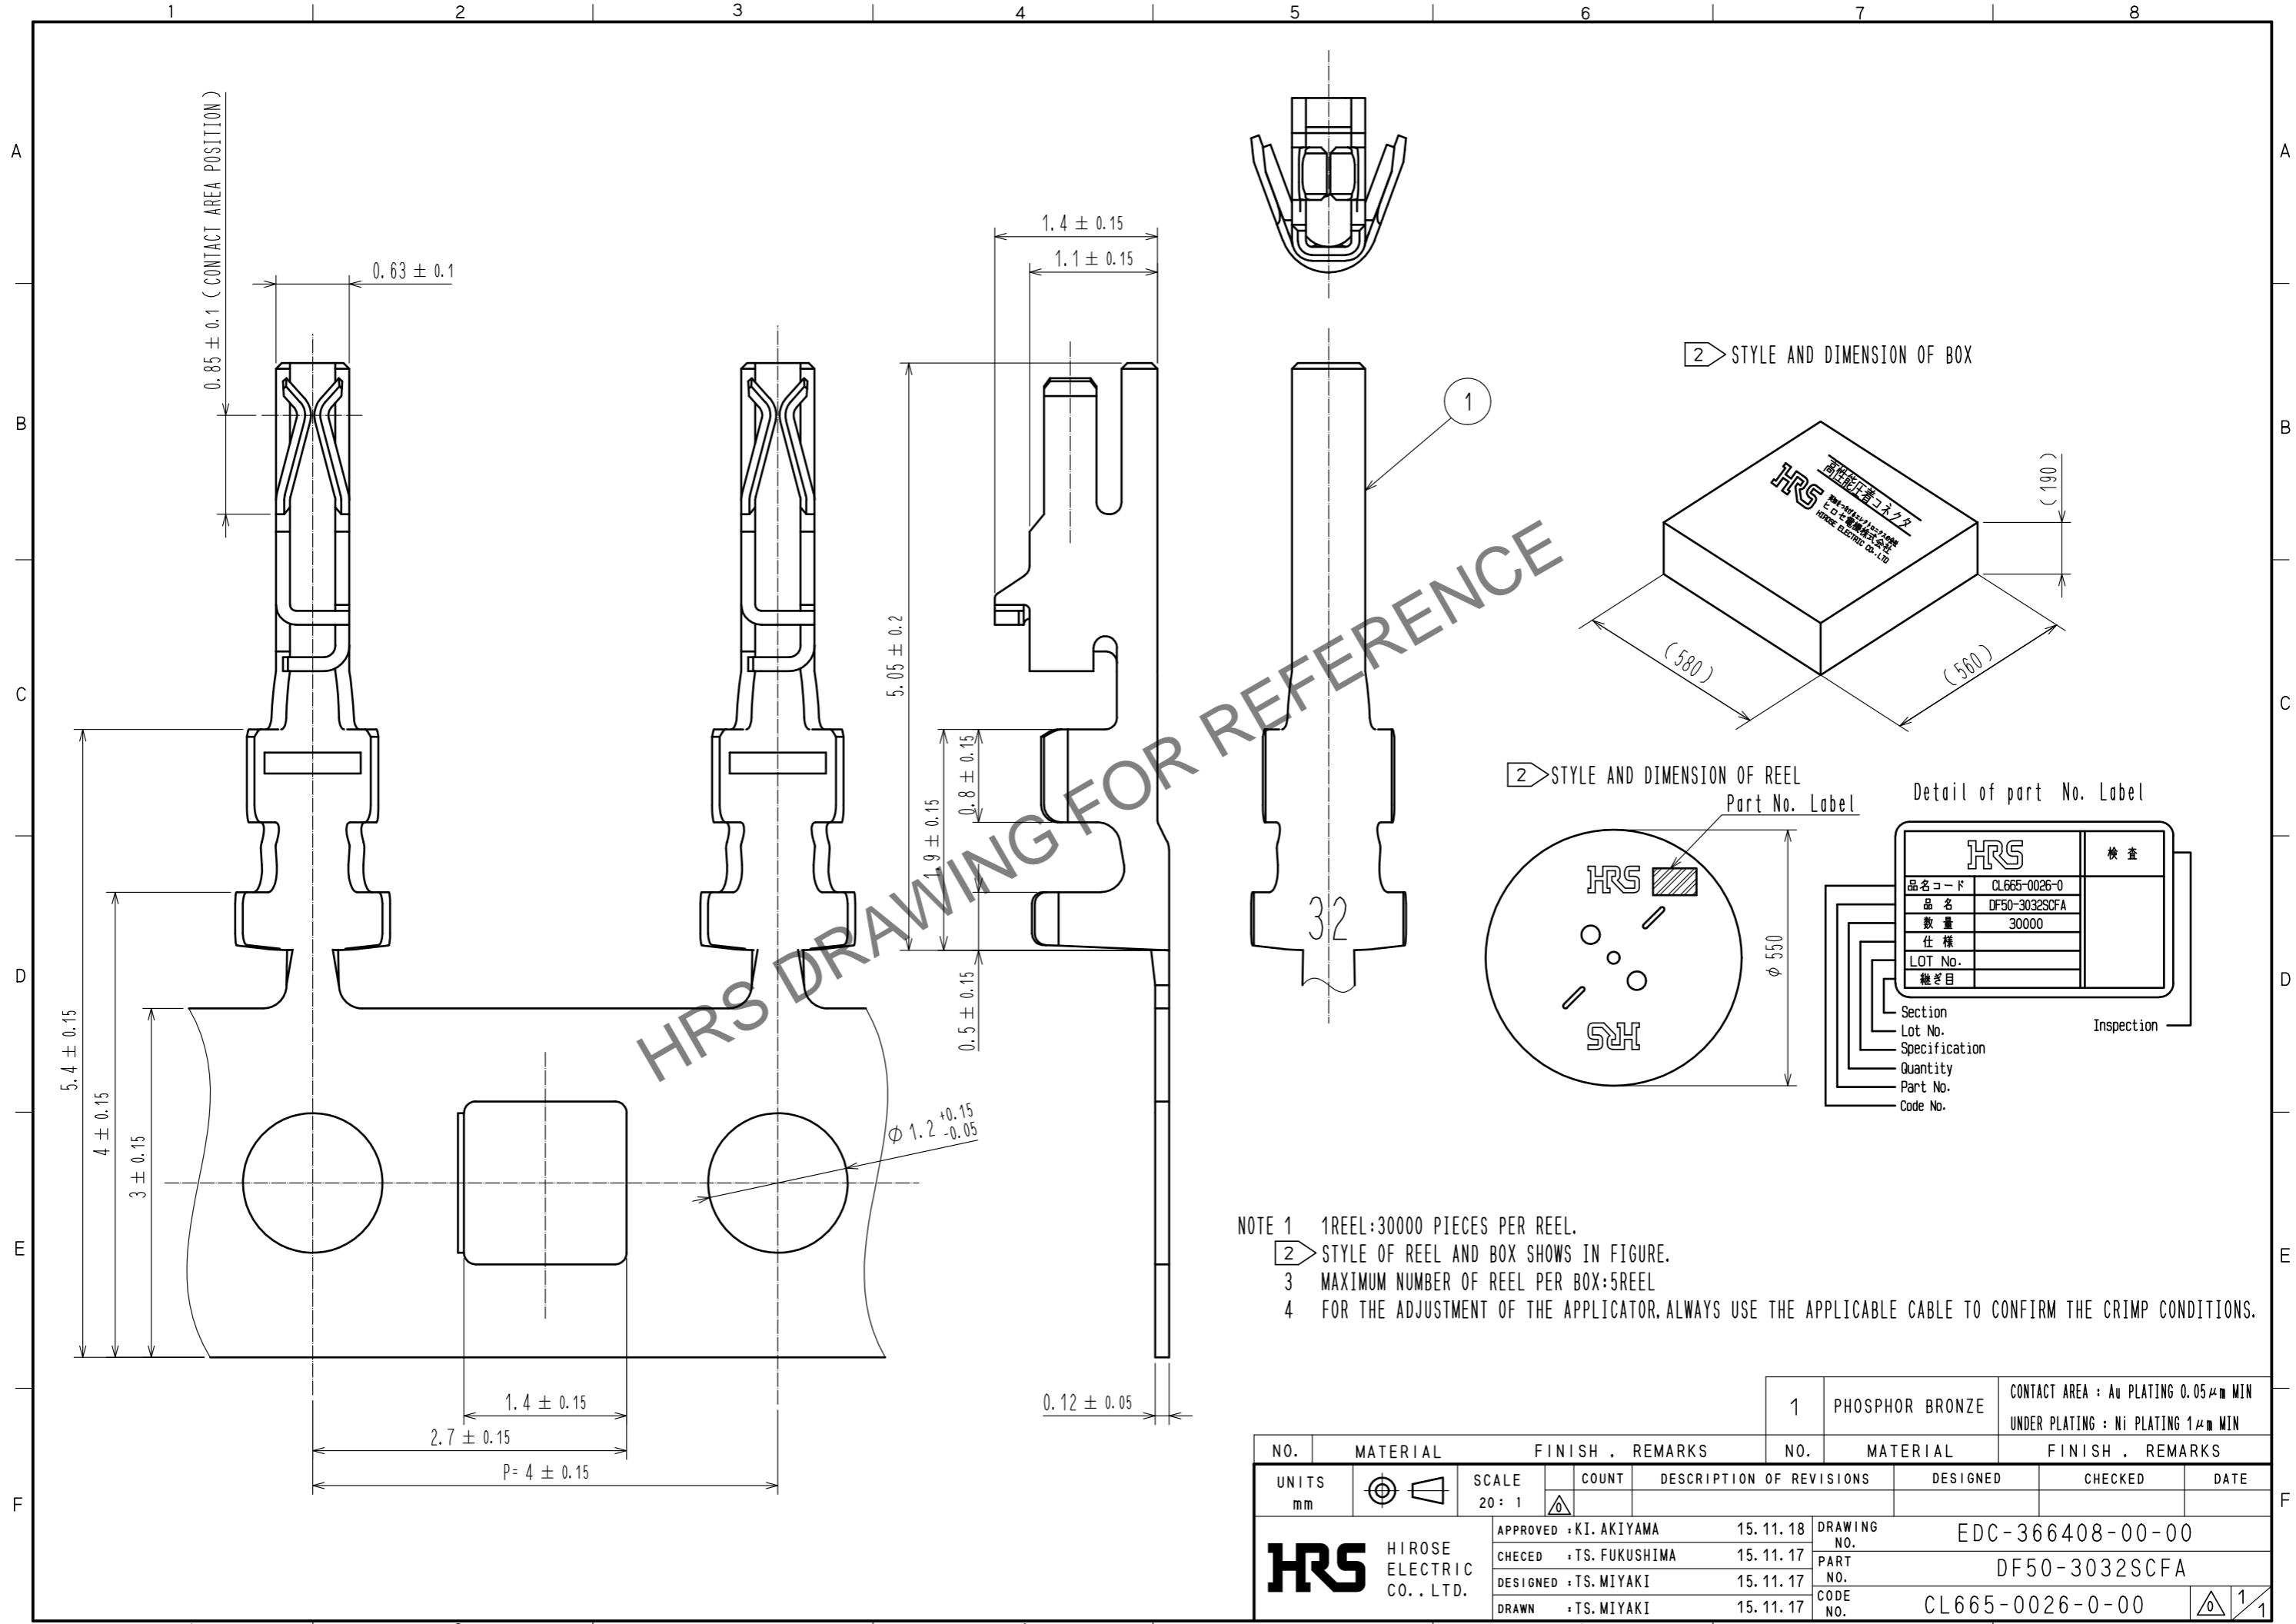

- NOTE 1 1REEL:30000 PIECES PER REEL.
 2 STYLE OF REEL AND BOX SHOWS IN FIGURE.
 3 MAXIMUM NUMBER OF REEL PER BOX:5REEL
 4 FOR THE ADJUSTMENT OF THE APPLICATOR, ALWAYS USE THE APPLICABLE CABLE TO CONFIRM THE CRIMP CONDITIONS.

NO.		MATERIAL		FINISH . REMARKS		NO.		MATERIAL		FINISH . REMARKS	
		1		PHOSPHOR BRONZE				CONTACT AREA : Au PLATING 0.05μm MIN		UNDER PLATING : Ni PLATING 1μm MIN	
UNITS		SCALE		COUNT		DESCRIPTION OF REVISIONS		DESIGNED		CHECKED	
mm		20 : 1		△							
APPROVED : KI. AKIYAMA		15.11.18		DRAWING NO.		EDC-366408-00-00					
CHECKED : TS. FUKUSHIMA		15.11.17		PART NO.		DF50-3032SCFA					
DESIGNED : TS. MIYAKI		15.11.17		CODE NO.		CL665-0026-0-00					
DRAWN : TS. MIYAKI		15.11.17									