

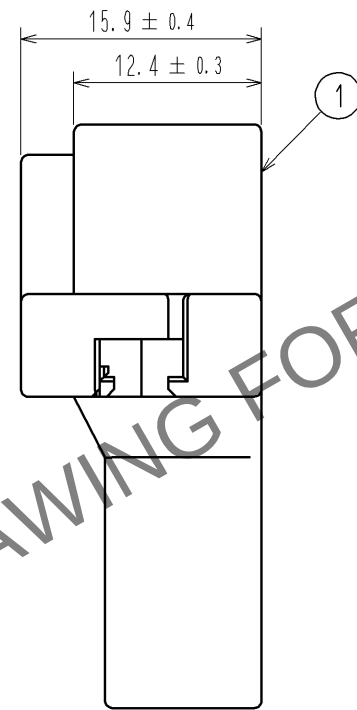
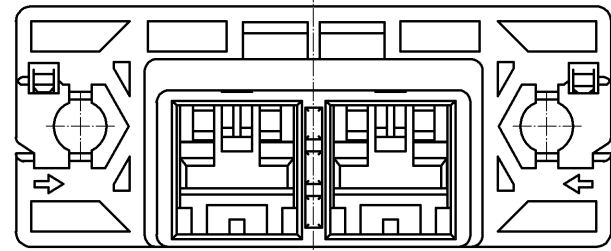
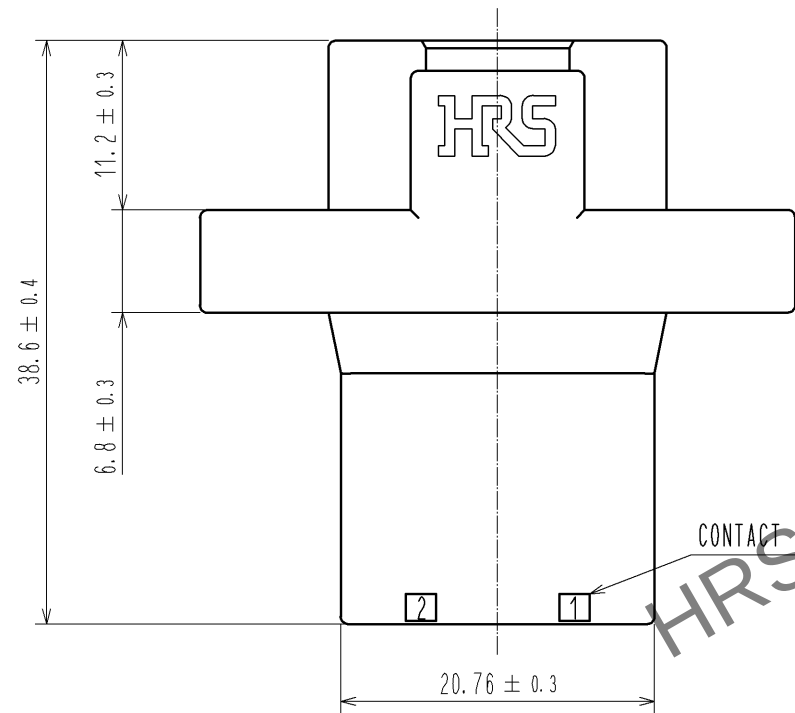



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

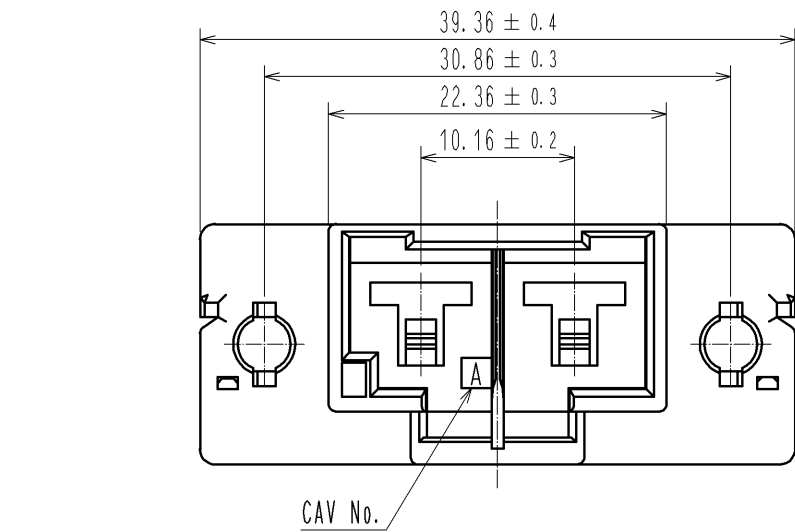

RECOMMENDED PANEL CUT OUT DIMENSION

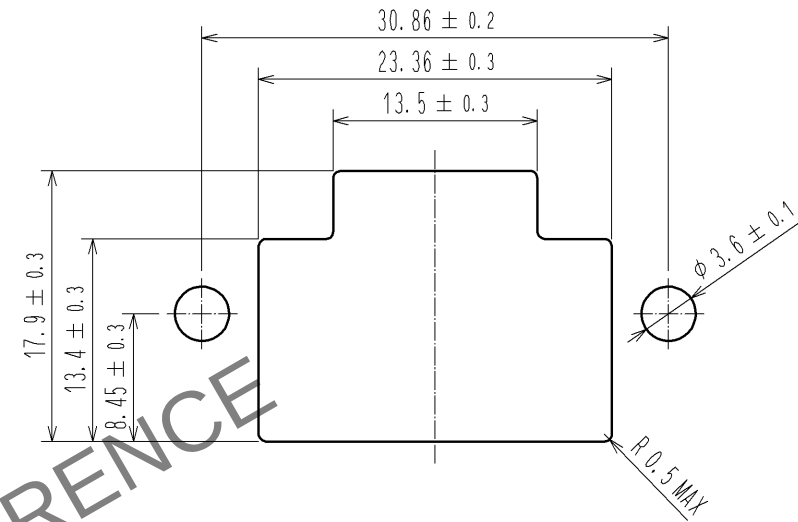

MATING FIGURE

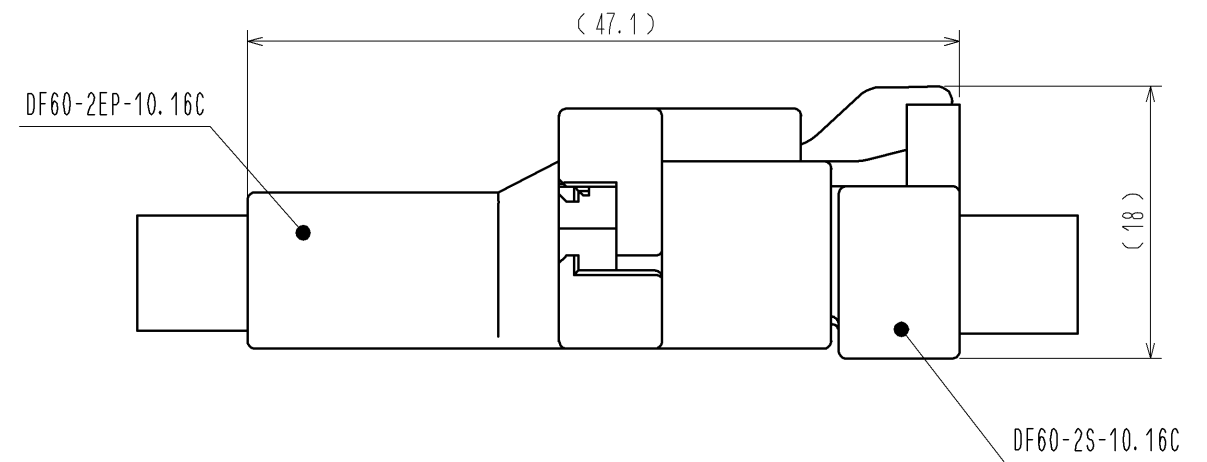


NOTE 1. PER PACK : 100 PIECES.

NO.				1				PBT				BLACK , UL94V-0			
MATERIAL				FINISH , REMARKS				MATERIAL				FINISH , REMARKS			
UNITS				SCALE				COUNT				DESCRIPTION OF REVISIONS			
mm				2 : 1				△				DESIGNED			
HRS				HIROSE ELECTRIC CO., LTD.				APPROVED : KI. AKIYAMA				13.12.03			
								CHECKED : HK. UMEHARA				13.12.03			
								DESIGNED : TS. KUMAZAWA				13.12.03			
								DRAWN : TS. KUMAZAWA				13.12.03			
								DRAWING NO.				EDC3-344821-01			
								PART NO.				DF60-2EP-10.16C			
								CODE NO.				CL680-3025-5-00			
												△ 1/2			


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

DF60 IN-LINE TYPE RECOMMENDED PANEL MOUNTING MANUAL (WHEN NUTS USES)


NUT INSTALLATION PROCESS

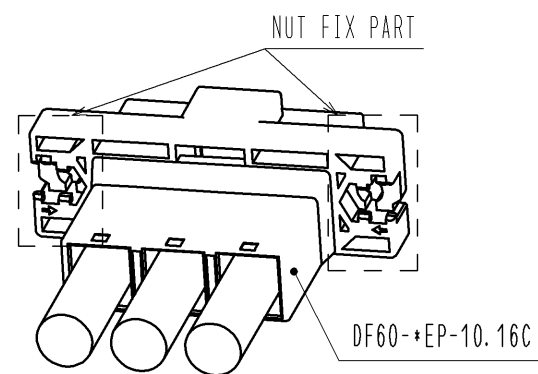

1. SLIDE A NUT (SIZE:M3) TO NUT FIX PART.

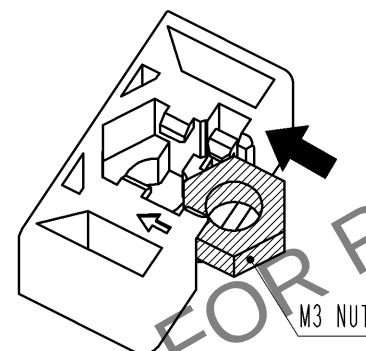


2. PRESS DOWN THE NUT UNTIL IT CLICKS,
THEN THIS SOUND MEANS THE NUT HAS INSERTED
INTO NUT HOLDER.

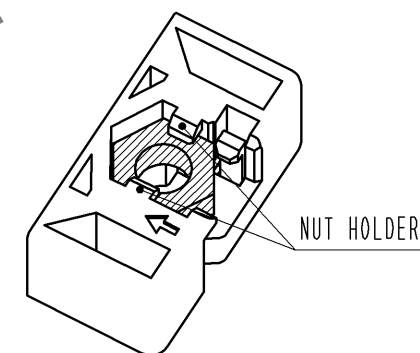


PANEL MOUNTING PROCESS

1. INSERT CONNECTOR INTO PANEL CUT OUT PART.

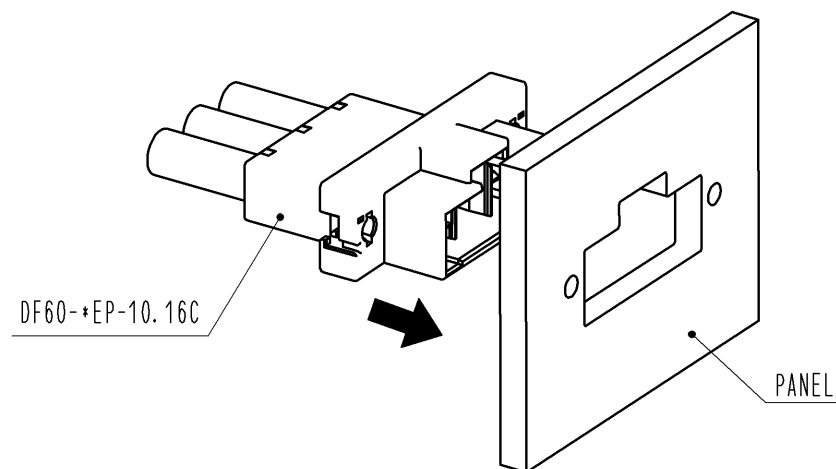

2. TIGHTEN A SCREW (SIZE:M3) TO FIX WITH PANEL.
RECOMMENDED TORQUE : LESS THAN 49N · cm

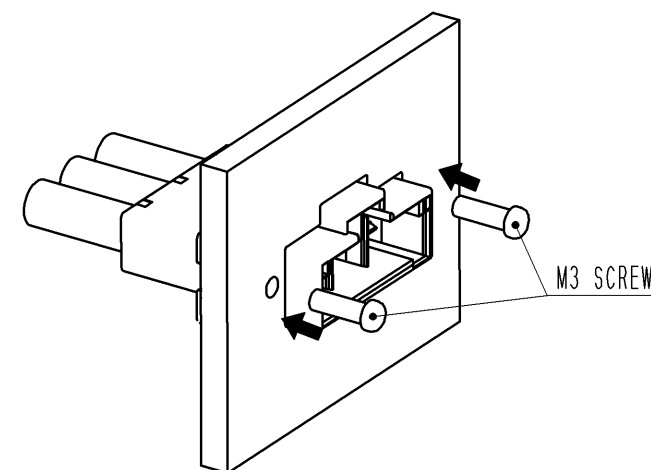

HRS

DRAWING NO.	EDC3-344821-01
PART NO.	DF60-2EP-10.16C
CODE NO.	CL680-3025-5-00

2/2