

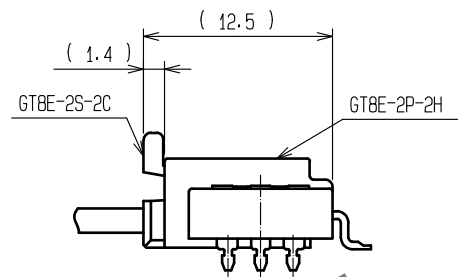
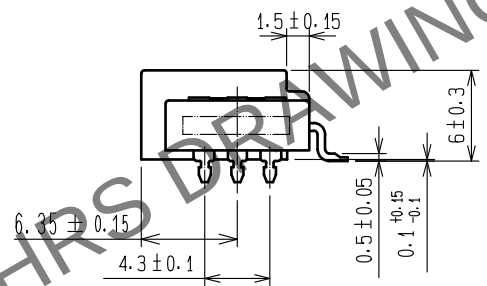
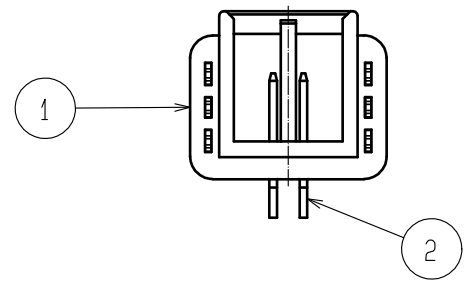
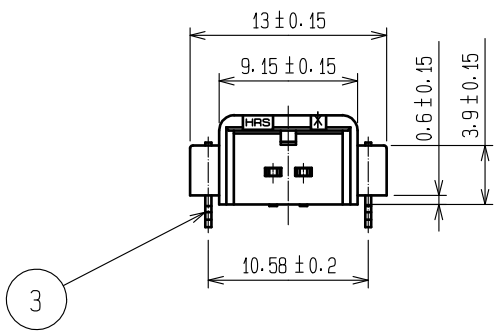
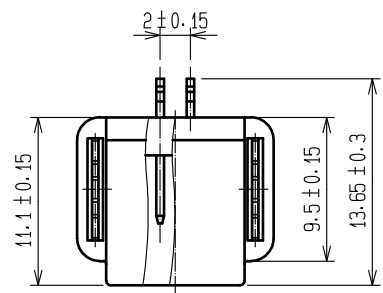


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV. RoHS COMPLIANT




MATED CONNECTORS

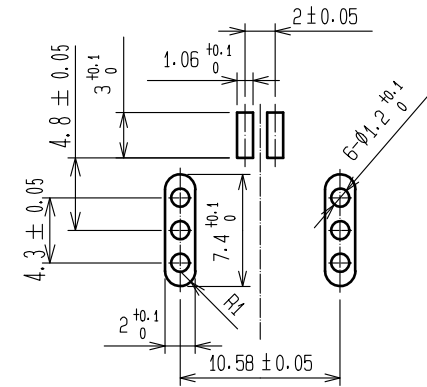


RECOMMENDED PC BOARD PATTERN

NOTE1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW
(REFER TO RIGHT FIG.)
USED REFLOW SYSTEM
: IR IN THE AIR OR NITROGEN
NO. OF CYCLES : 2 MAX
PEAK : 250°C
OVER 230°C : 20~40s
PREHEAT : 150~180°C
60~120s

2. CO-PLANARITY SHALL BE 0.1 MAX.
3. MATING HALF: GT8E-2S-2C (CL758-0030-6)



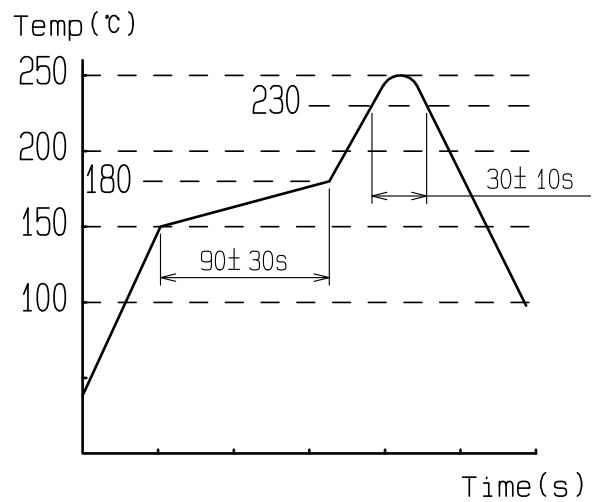


2	BRASS	TIN PLATING							
1	PPS	BLACK		3	BRASS	TIN PLATING			
NO.	MATERIAL	FINISH , REMARKS		NO.	MATERIAL	FINISH , REMARKS			
UNITS mm		SCALE 2 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-T-00011544		DESIGNED AN. SAIKI	CHECKED HH. TSUKUMO	DATE 20220214
 HIROSE ELECTRIC CO., LTD.			APPROVED : HH. TSUKUMO		20200729	DRAWING NO. EDC-166400-57-00			
			CHECKED : HH. TSUKUMO		20200729	PART NO. GT8E-2P-2H(57)			
			DESIGNED : DONGCHAN KIM		20200729	CODE NO. CL0758-0032-1-57			
			DRAWN : YK. MITSUISHI		20200729	 1/2			


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV. RoHS COMPLIANT

TOP COVER TAPE
EMBOSED CARRIER TAPE
GT8E-2P-2H

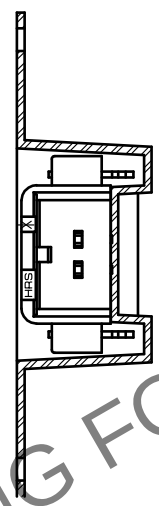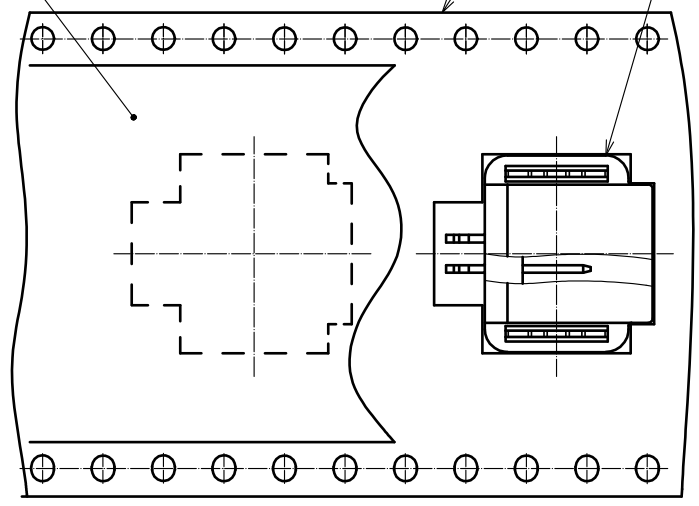

HRS DRAWING FOR REFERENCE

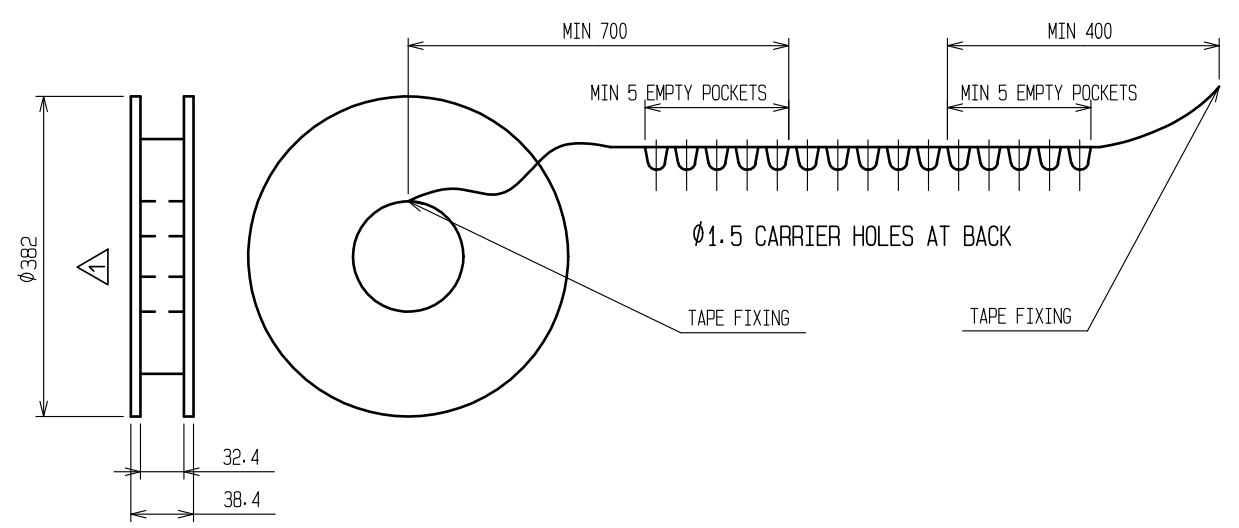

NOTE1. PACKING TYPE:TAPE AND REEL. 500 PCS PER REEL.

HRS	DRAWING NO.	EDC-166400-57-00		
	PART NO.	GT8E-2P-2H(57)		
	CODE NO.	CL0758-0032-1-57	1	2