






ELV, RoHS COMPLIANT

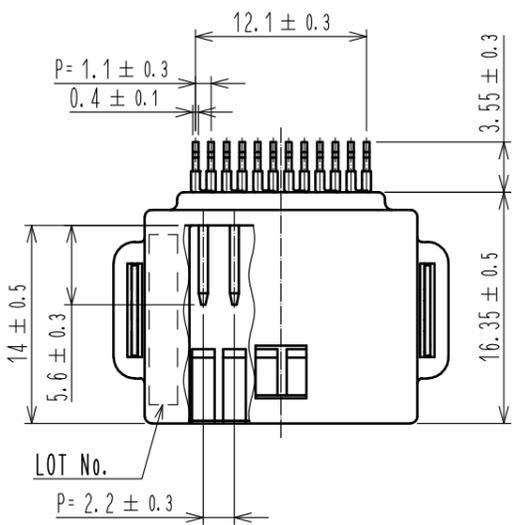


PIN ASSIGNMENT

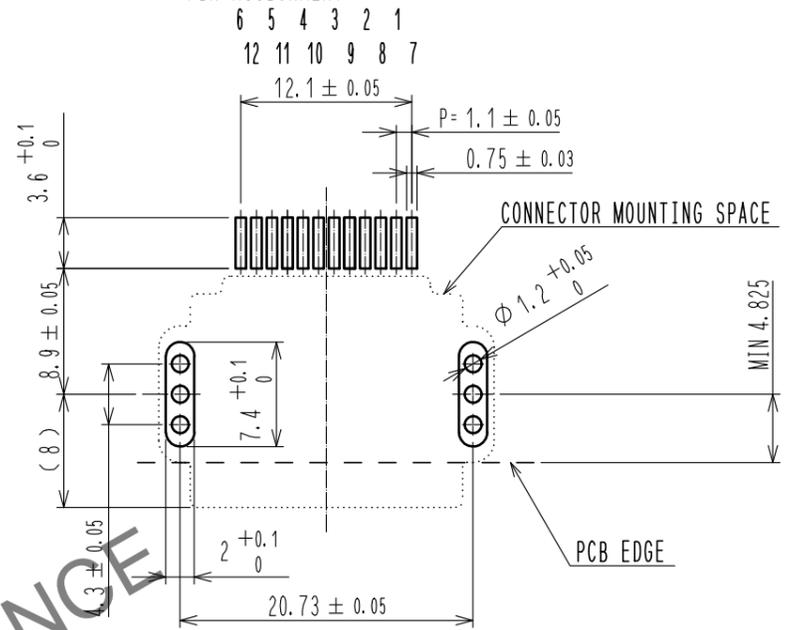

RECOMMENDED PCB PATTERN

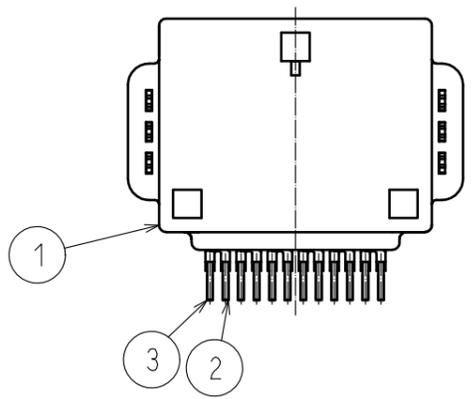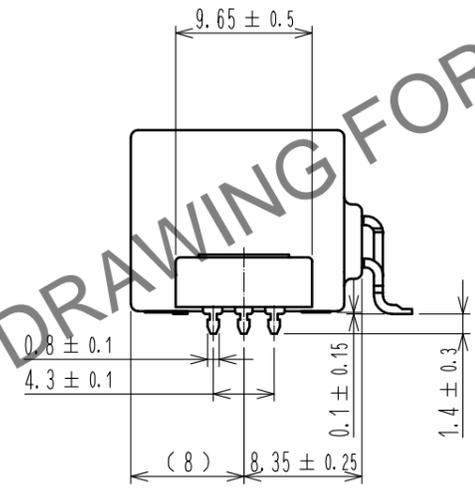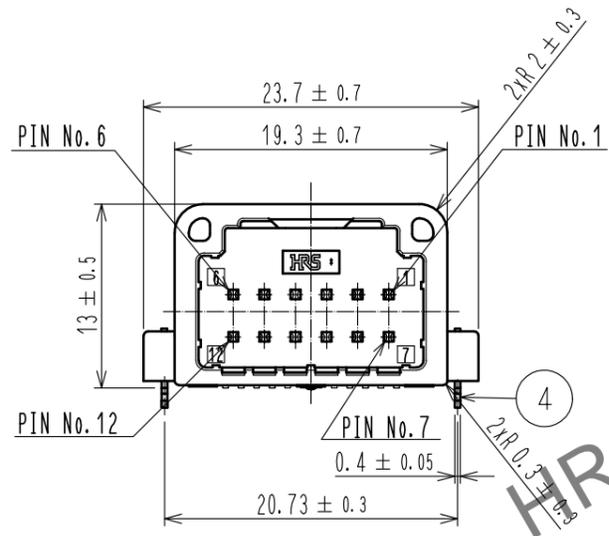

- NOTE 1. RECOMMENDED TEMPERATURE PROFILE FOR REFLOW (REFER TO RIGHT FIG.)  
 USED REFLOW SYSTEM : IR IN THE AIR OR NITROGEN  
 NO. OF CYCLES : 2 MAX  
 PEAK : 250°C  
 OVER 230°C : 20~40s  
 PREHEAT : 150~180°C  
 60~120s  
 2. TEMPERATURE FOR SOLDERING IRON : 280~300°C WITHIN 2s  
 3. CO-PLANARITY SHALL BE 0.1mm MAX.  
 4. RECOMMENDED PCB THICKNESS IS 1.6mm.  
 5. RECOMMENDED SOLDER THICKNESS IS 0.15mm.

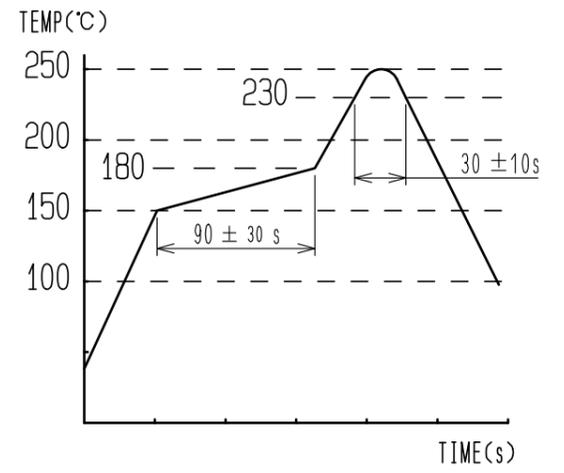


3	BRASS	TIN PLATED T=0.64	6	PET				
2	BRASS	TIN PLATED T=0.64	5	PS				
1	PPS	BLACK	4	BRASS	TIN PLATED T=0.4			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS			
UNITS	mm	SCALE	2 : 1	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
<b>HRS</b> HIROSE ELECTRIC CO., LTD.		APPROVED : NH. NAKATA	16.02.29	DRAWING NO. EDC-361744-00-00				
		CHECKED : HS. OZAWA	16.02.29	PART NO. GT25H2-12DP-2.2H				
		DESIGNED : TK. SHISHIKURA	16.02.26	CODE NO. CL775-0092-9-00				
		DRAWN : TK. SHISHIKURA	16.02.26					

In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.


# PACKAGING SPECIFICATION

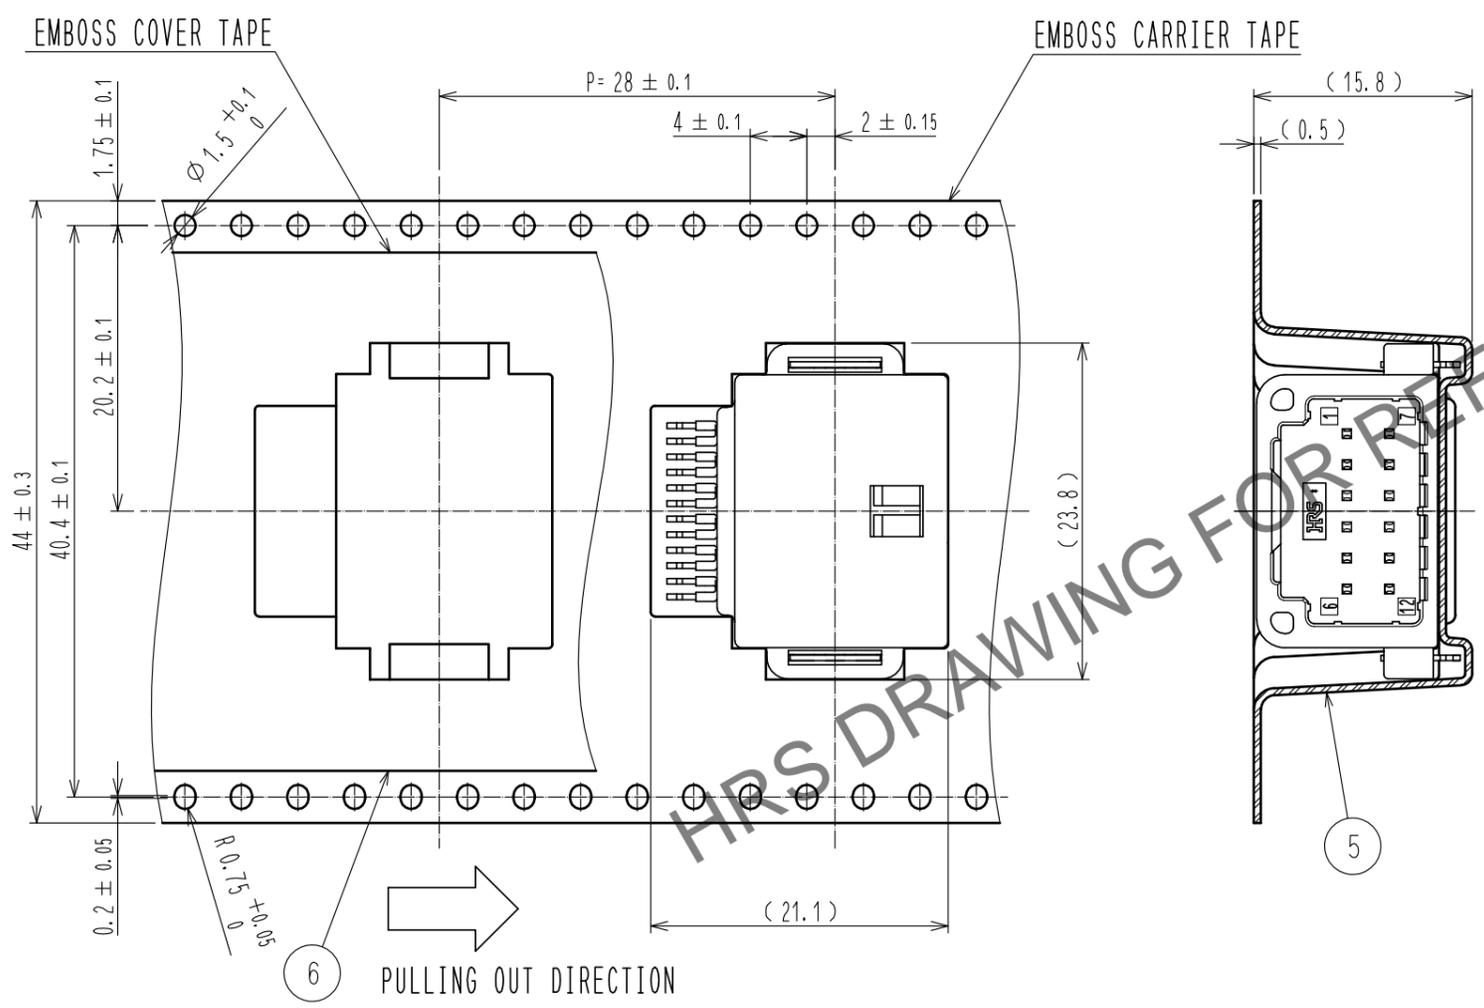

## REEL DIMENSION(FREE)

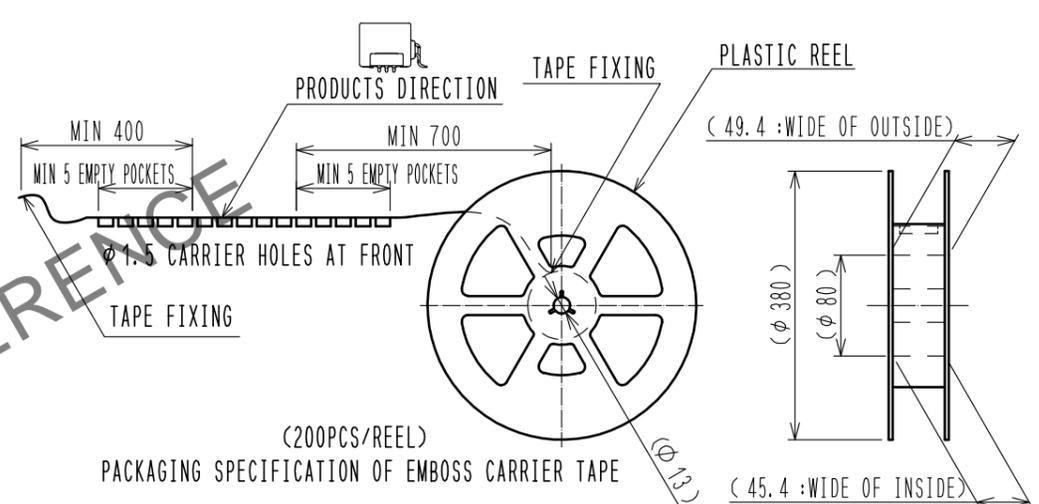

## CARDBOARD DIMENSION(FREE)

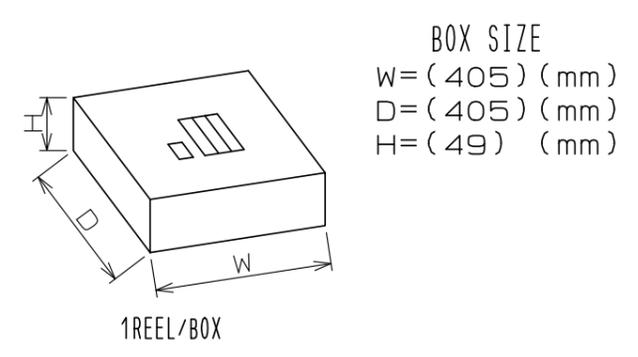

<b>HRS</b>	DRAWING NO.	EDC-361744-00-00
	PART NO.	GT25H2-12DP-2.2H
	CODE NO.	CL775-0092-9-00
		2/2