
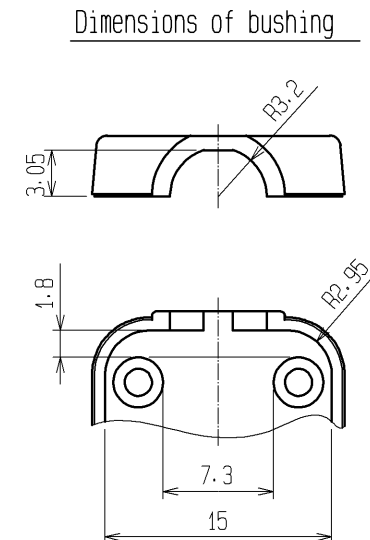
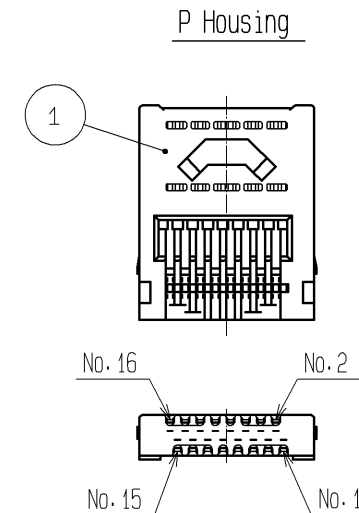
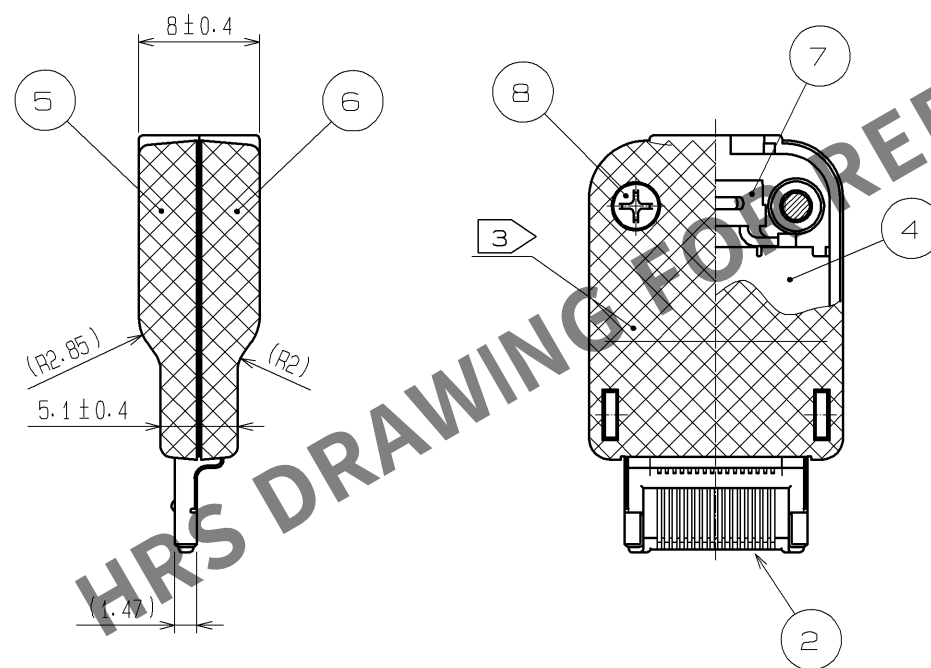
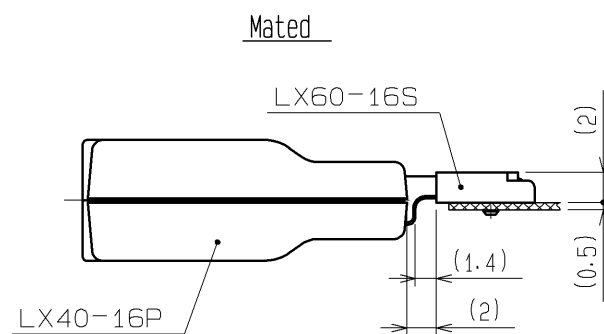
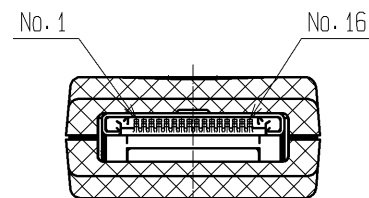
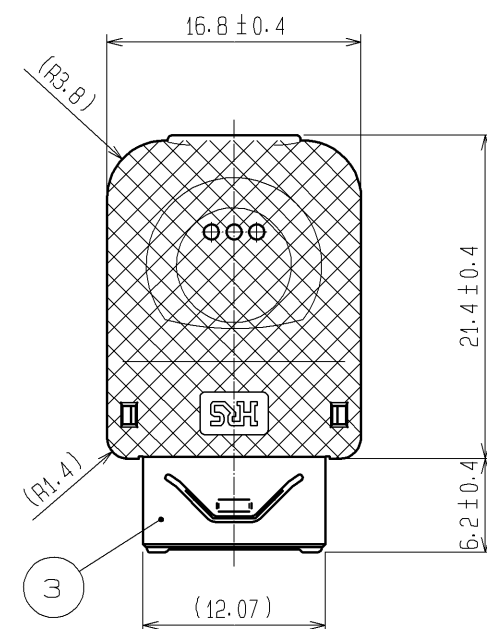
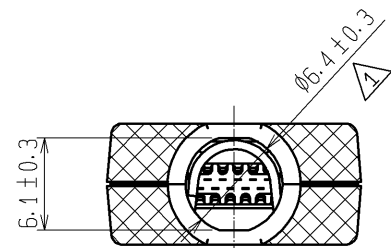




- Notes) 1. Cable is to be fixed firmly by a bushing or one-piece molded cable bushing, and use non color migrant resin as material for bushing.
2. Components are packed separately by the types of parts with cross-carved tapping screws attached.
- 3 Oblique-Hatched area  is Matte-Finished.
4. Procedure of connecting wires is shown in ATAD-E2746 or ATAD-E2444.

4	Stainless steel		8	Steel	
3	Stainless steel		7	Brass	
2	Copper Alloy	Contact: Selective gold plating (0.3μm) Terminal area: Selective gold flush plating	6	PC	Color: Black UL94V-0
1	PA9T(9TNylon)	Color: Black UL94V-0	5	PC	Color: Black UL94V-0
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-E-002250	DESIGNED S.J. SHIMIZU
 HIROSE ELECTRIC CO., LTD.		APPROVED : H.O. MIWA	05.01.05	DRAWING NO.	EDC3-124883-00
		CHECKED : Y.H. ENAMI	05.01.05	PART NO.	LX40-16P
		DESIGNED : T.U. TANIGUCHI	05.01.05	CODE NO.	CL245-0002-3-00
		DRAWN : T.U. TANIGUCHI	05.01.05		
					DATE 08.04.14