


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

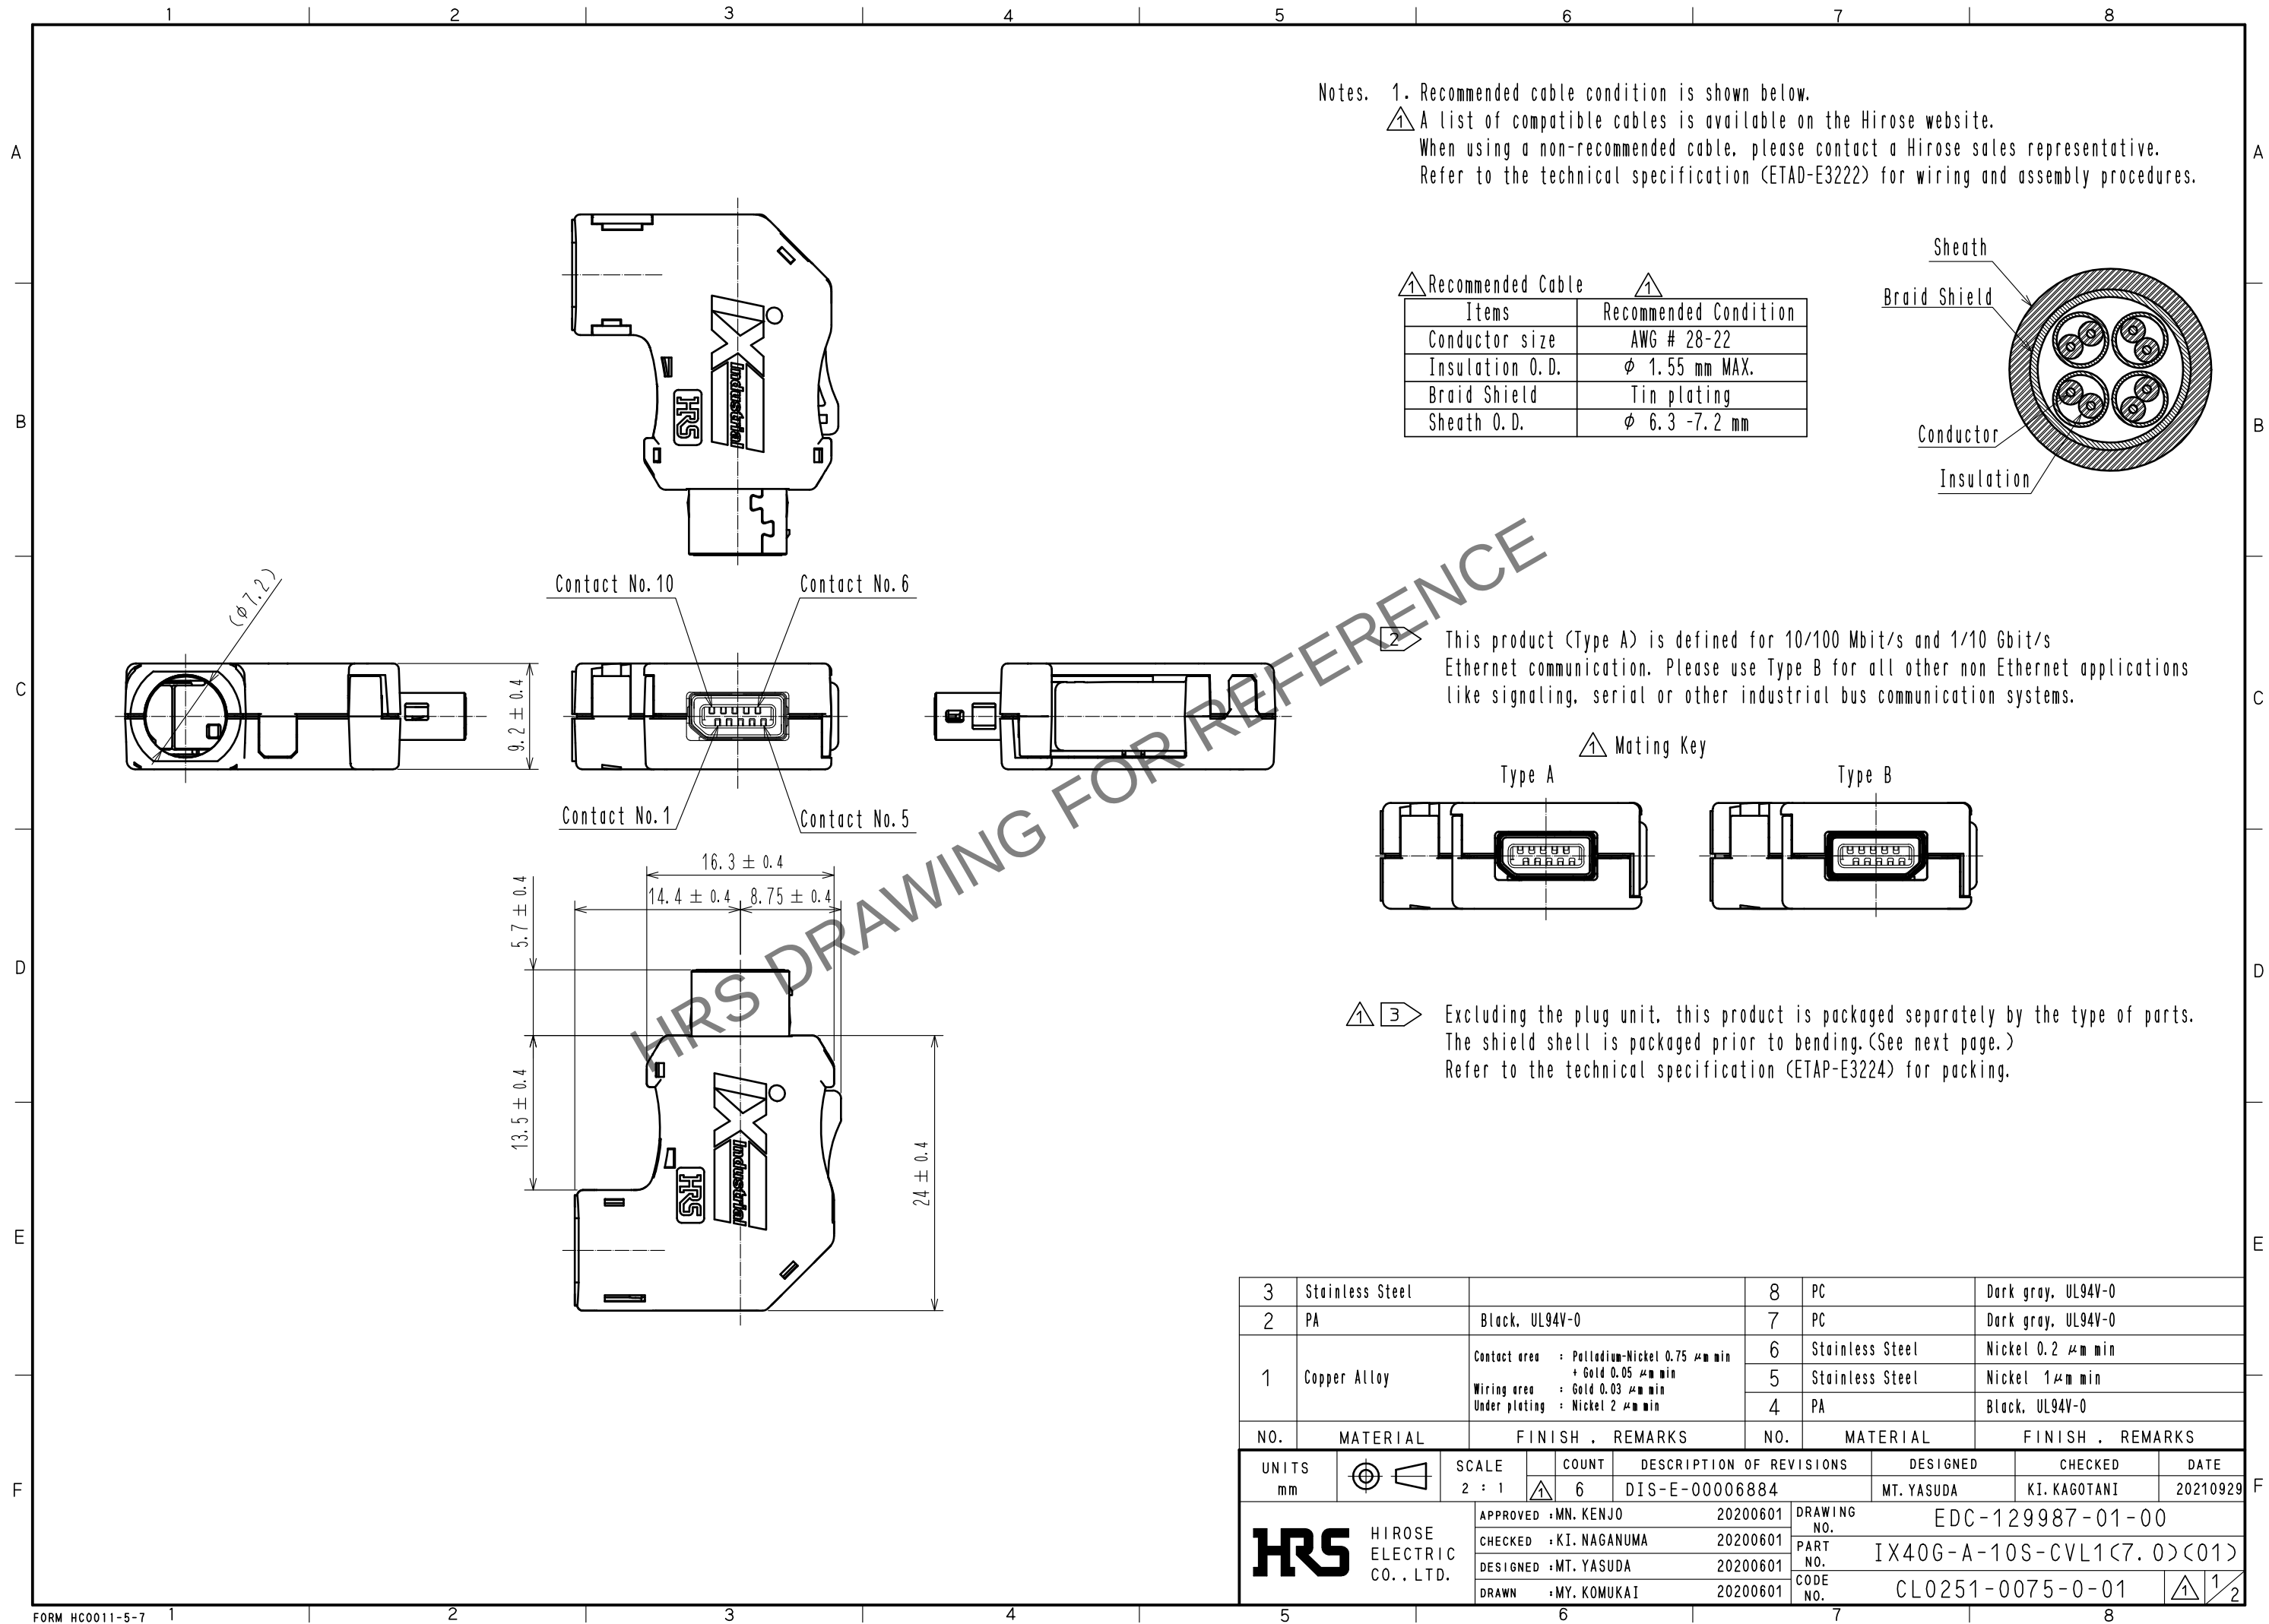


3	Stainless Steel		8	PC	Dark gray, UL94V-0					
2	PA	Black, UL94V-0	7	PC	Dark gray, UL94V-0					
1	Copper Alloy	Contact area : Palladium-Nickel 0.75 μm min + Gold 0.05 μm min	6	Stainless Steel	Nickel 0.2 μm min					
		Wiring area : Gold 0.03 μm min	5	Stainless Steel	Nickel 1 μm min					
		Under plating : Nickel 2 μm min	4	PA	Black, UL94V-0					
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS				
UNITS mm				SCALE 2 : 1		COUNT 6	DESCRIPTION OF REVISIONS DIS-E-00006884	DESIGNED MT. YASUDA	CHECKED KI. KAGOTANI	DATE 20210929
HIROSE ELECTRIC CO., LTD.				APPROVED : MN. KENJO 20200601		DRAWING NO. EDC-129987-01-00				
				CHECKED : KI. NAGANUMA 20200601		PART NO. IX40G-A-10S-CVL1(7.0)(01)				
				DESIGNED : MT. YASUDA 20200601		CODE NO. CL0251-0075-0-01				
				DRAWN : MY. KOMUKAI 20200601		1/2				

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



2 Pin Assignment For 10/100 Mbit/s And 1/10 Gbit/s Ethernet

Contact No.	Signal	
	10/100 Mbit/s	1/10 Gbit/s
1	TX+	BI_DA+
2	TX-	BI_DA-
3	N.C	N.C
4	N.C	BI_DC+
5	N.C	BI_DC-
6	RX+	BI_DB+
7	RX-	BI_DB-
8	N.C	N.C
9	N.C	BI_DD+
10	N.C	BI_DD-


3 Shield Shell Delivery Form

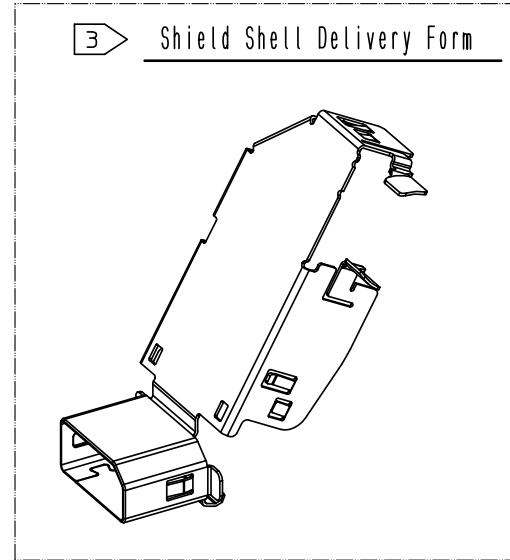

3 Product Structure

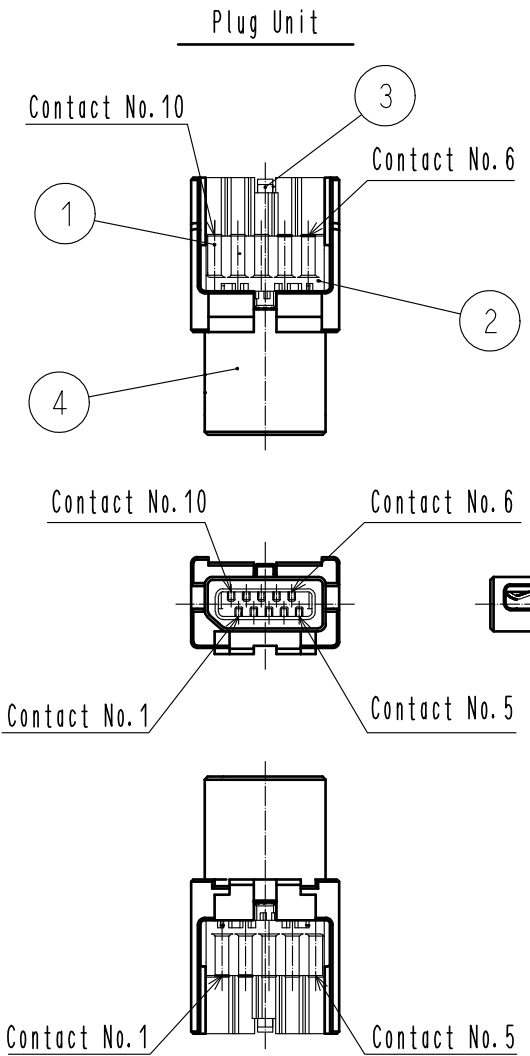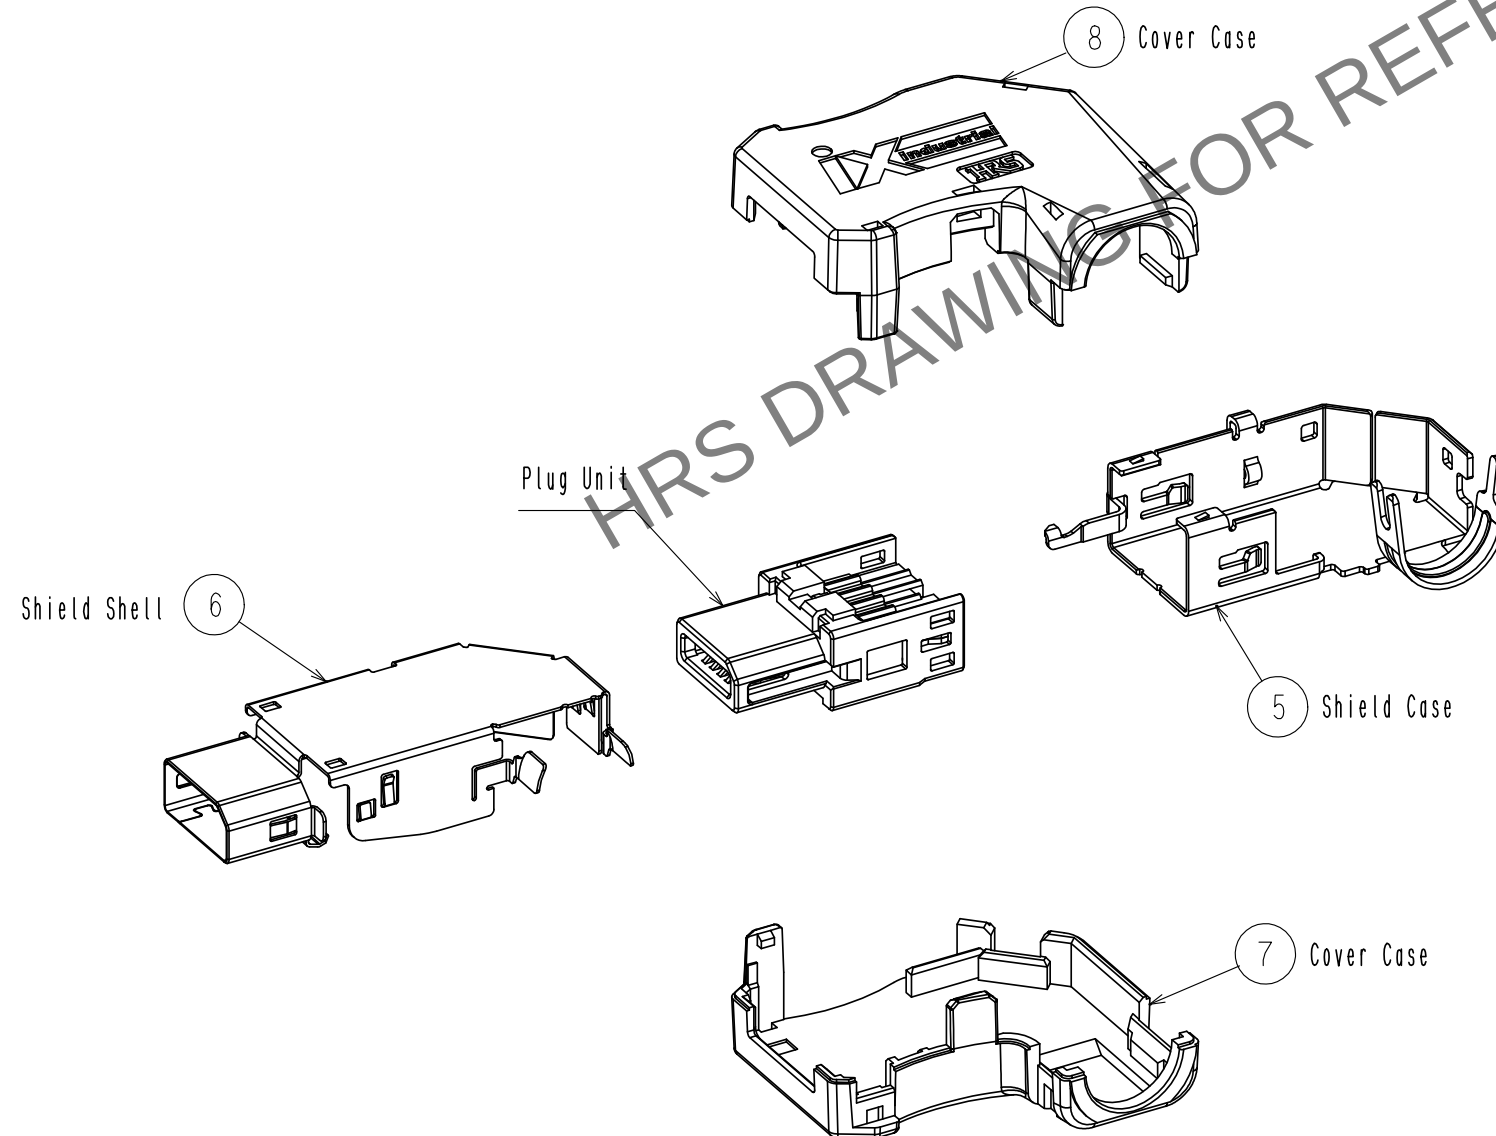

1 Mated Condition

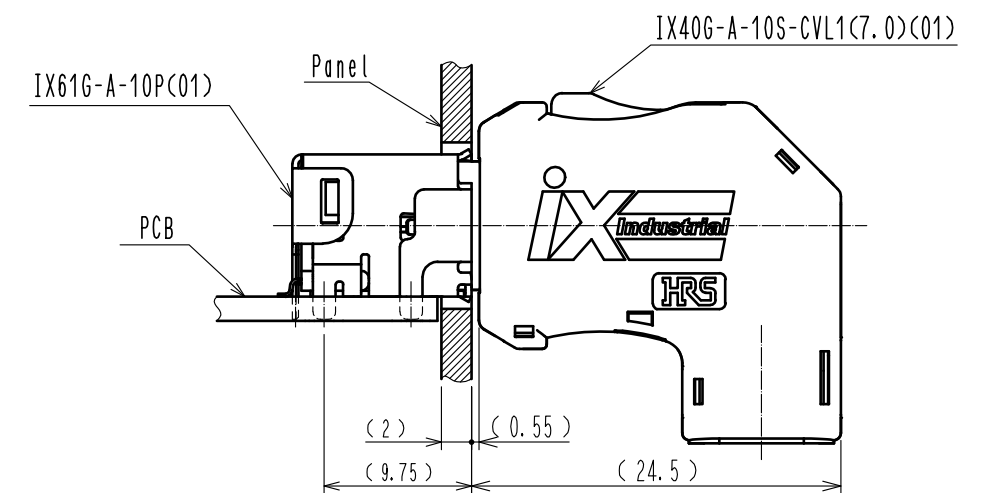

HRS

DRAWING NO.	EDC-129987-01-00
PART NO.	IX40G-A-10S-CVL1(7.0)(01)
CODE NO.	CL0251-0075-0-01

2/2