


Mar.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

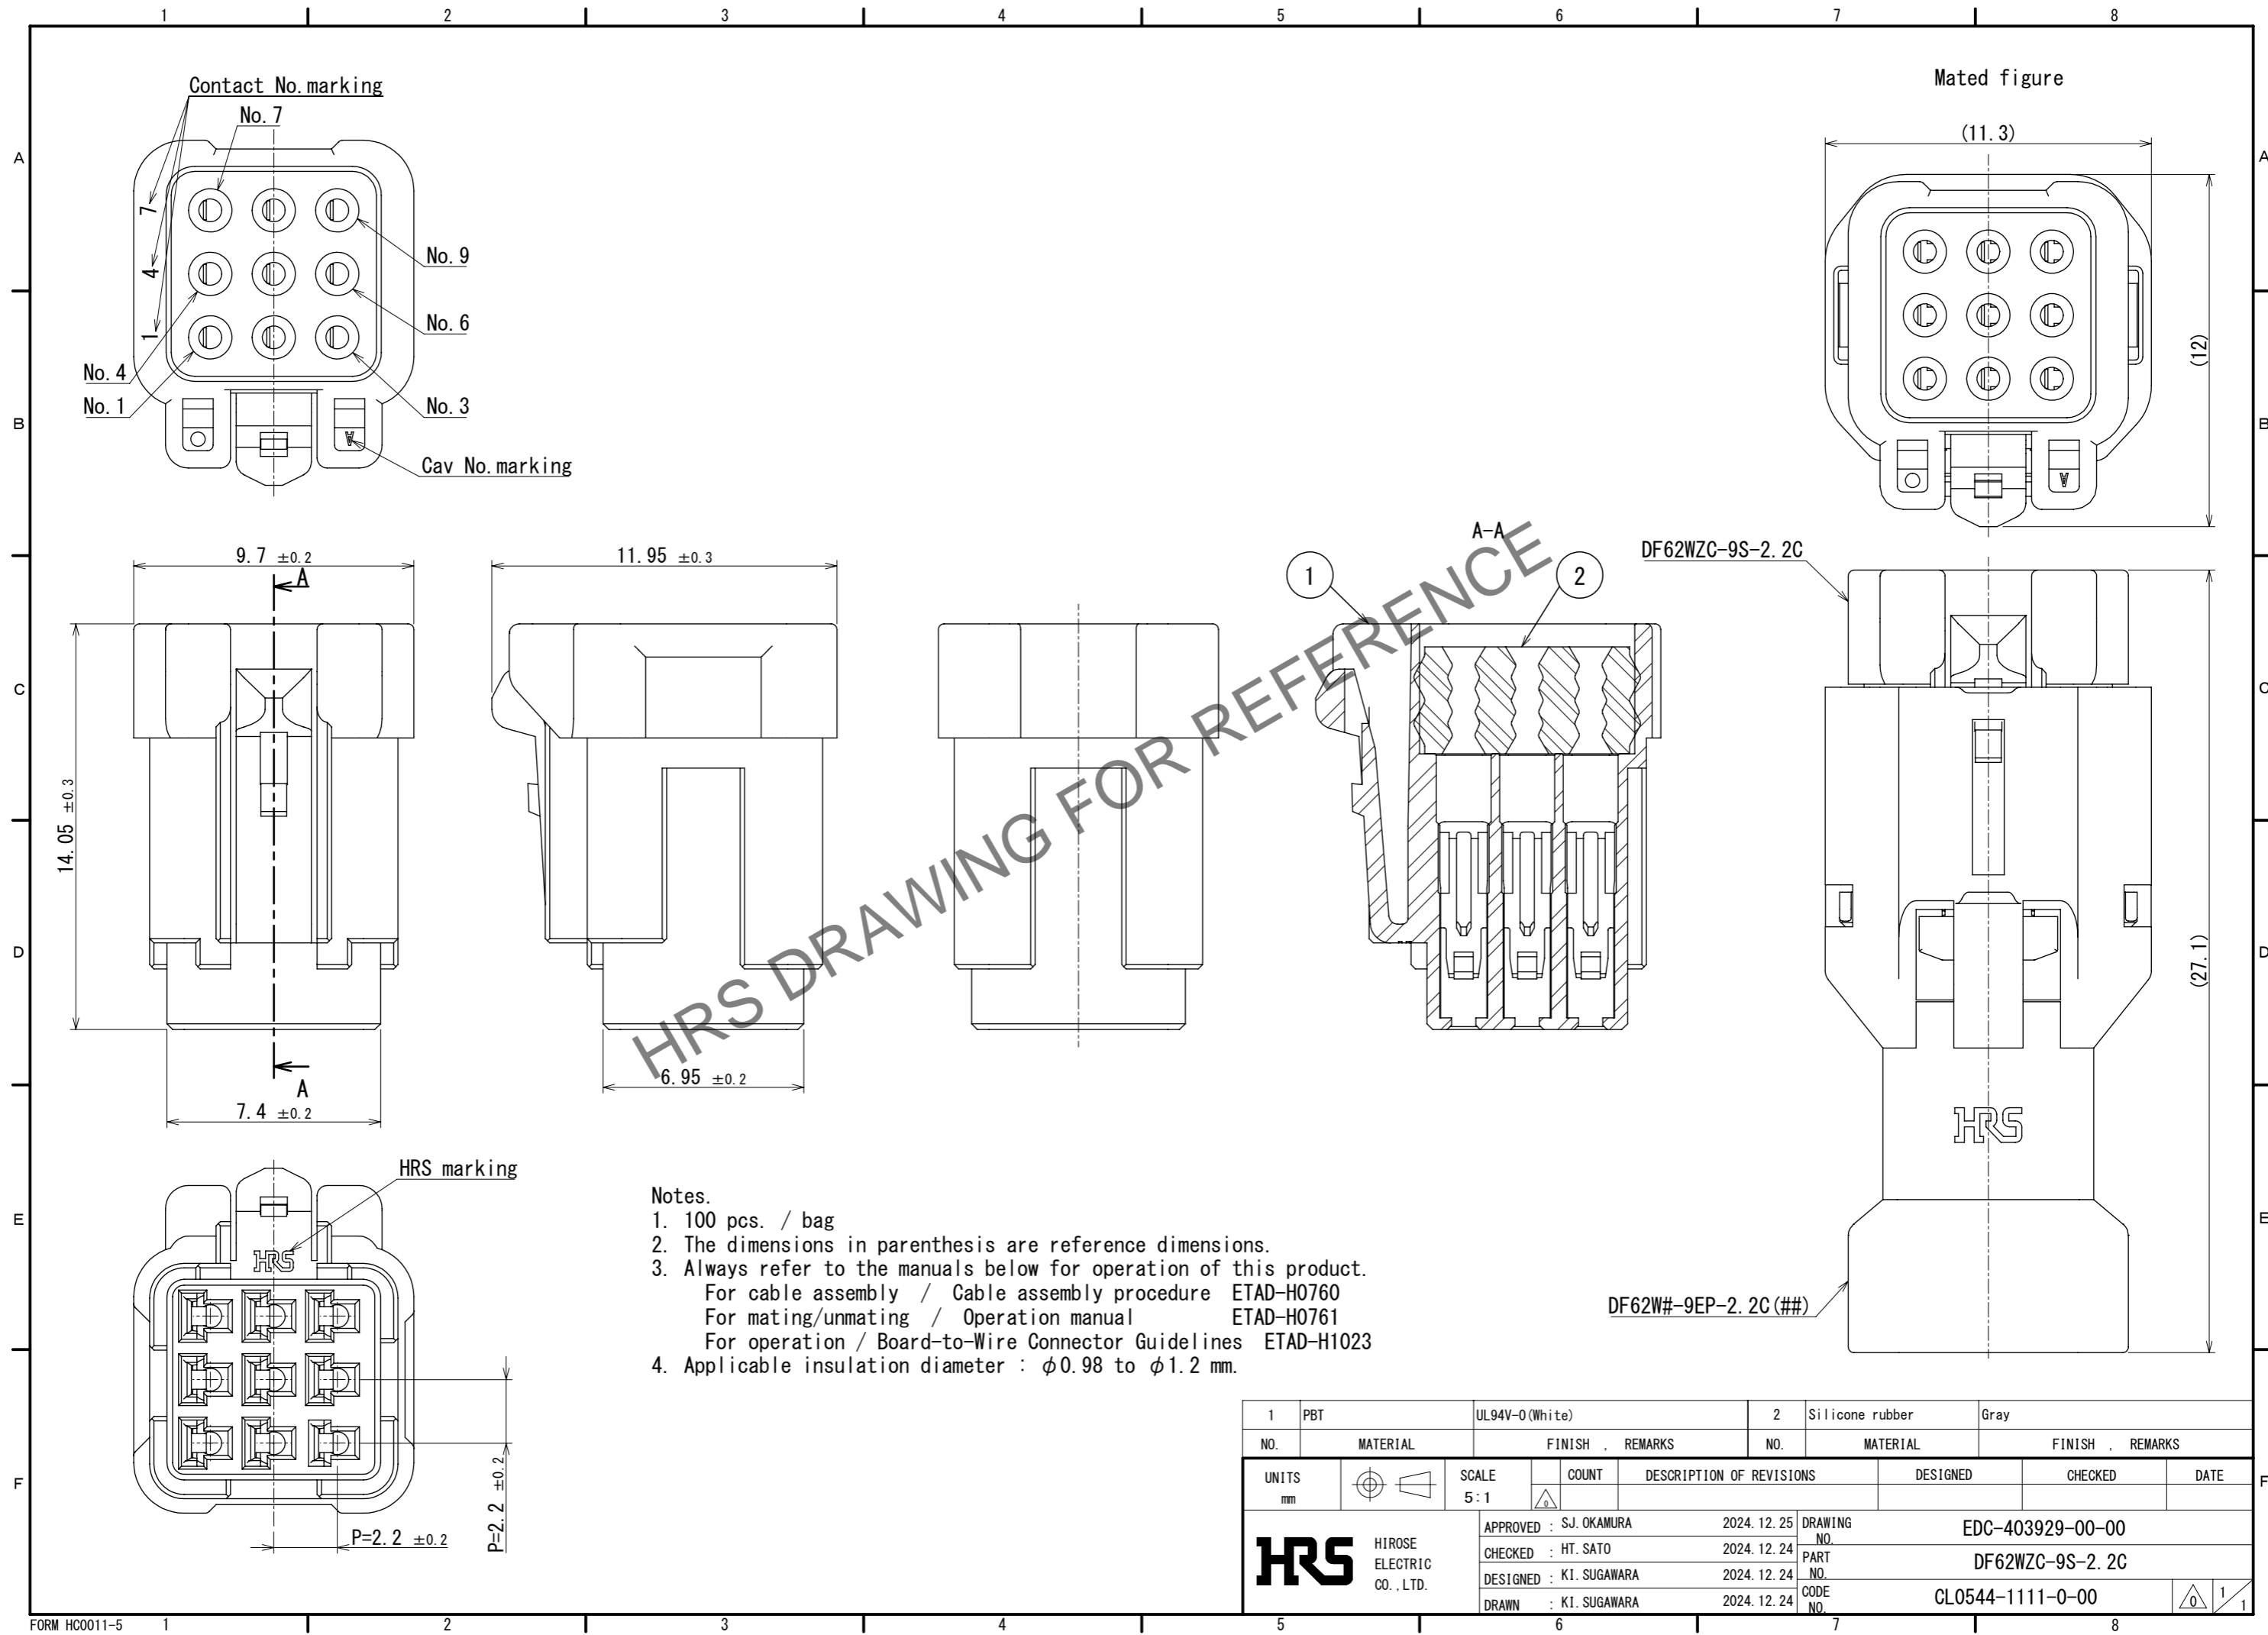

- Notes.**
- 100 pcs. / bag
 - The dimensions in parenthesis are reference dimensions.
 - Always refer to the manuals below for operation of this product.
 For cable assembly / Cable assembly procedure ETAD-H0760
 For mating/unmating / Operation manual ETAD-H0761
 For operation / Board-to-Wire Connector Guidelines ETAD-H1023
 - Applicable insulation diameter : $\phi 0.98$ to $\phi 1.2$ mm.

1	PBT	UL94V-0(White)	2	Silicone rubber	Gray			
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS	
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
mm		5:1	Δ					
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : SJ. OKAMURA	2024. 12. 25	DRAWING NO.		EDC-403929-00-00		
		CHECKED : HT. SATO	2024. 12. 24	PART NO.		DF62WZC-9S-2. 2C		
		DESIGNED : KI. SUGAWARA	2024. 12. 24	CODE NO.		CL0544-1111-0-00		
		DRAWN : KI. SUGAWARA	2024. 12. 24					