


Mar.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

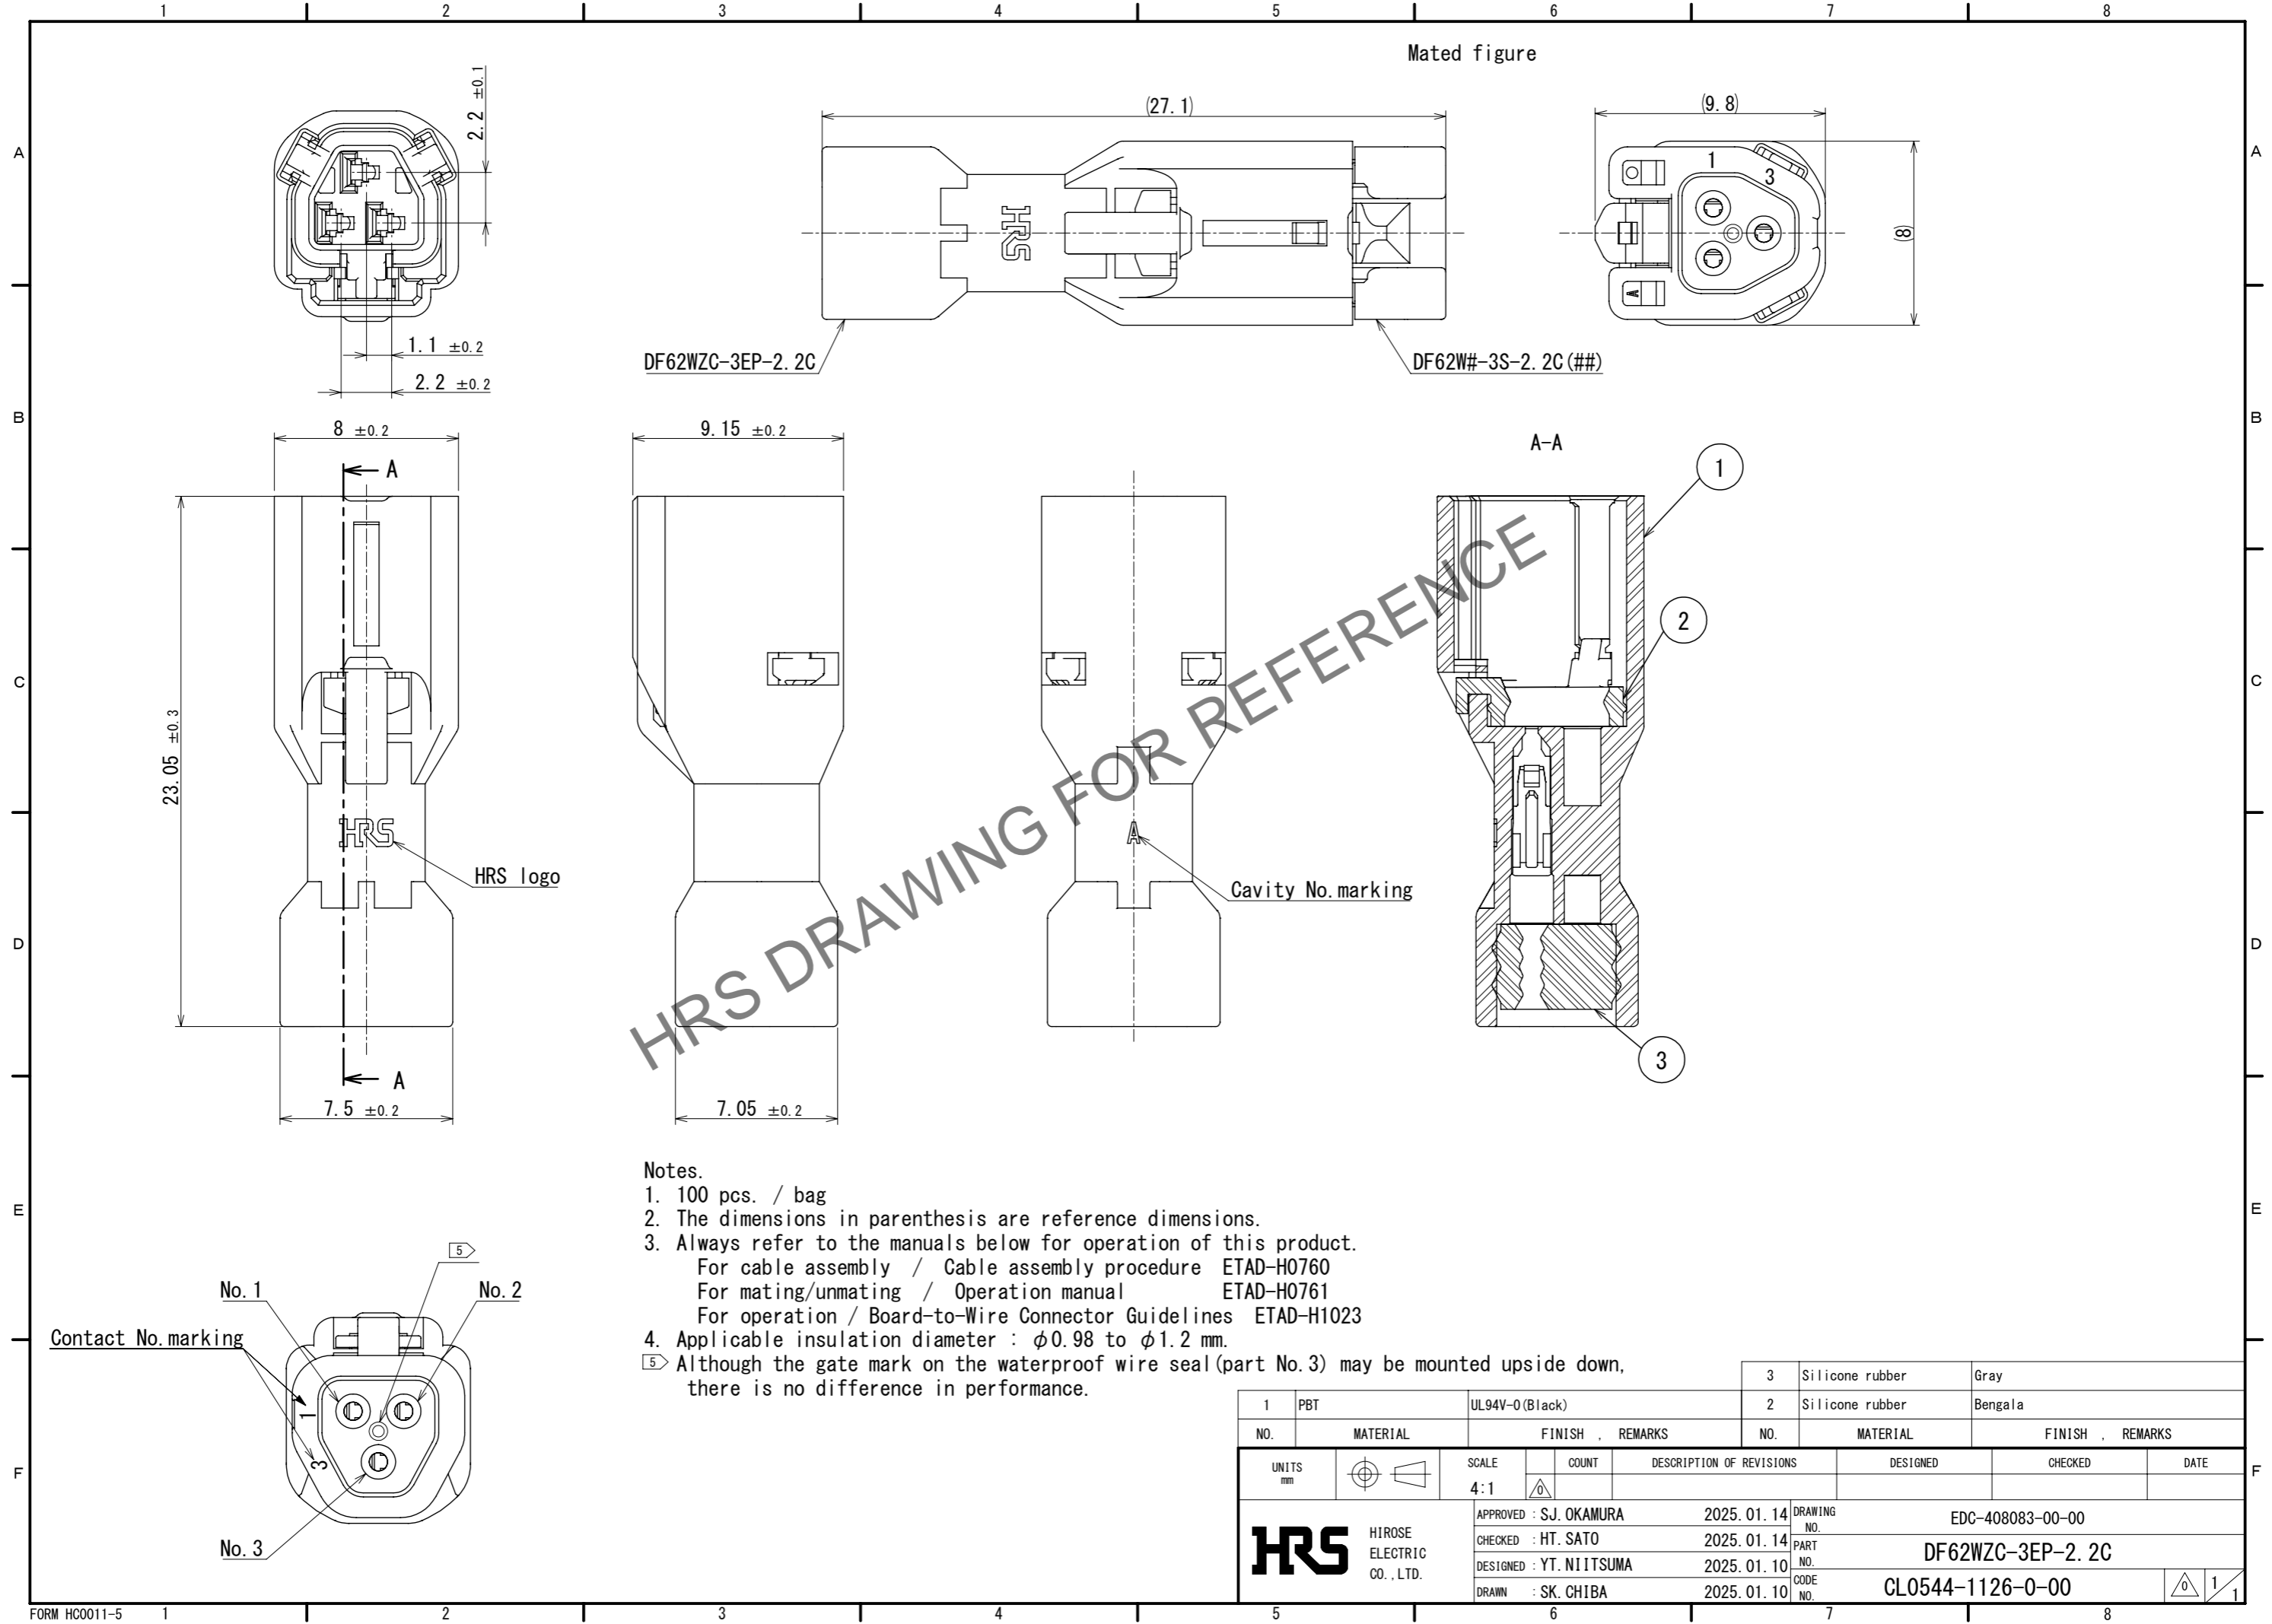

Notes.

1. 100 pcs. / bag
2. The dimensions in parenthesis are reference dimensions.
3. Always refer to the manuals below for operation of this product.
 For cable assembly / Cable assembly procedure ETAD-H0760
 For mating/unmating / Operation manual ETAD-H0761
 For operation / Board-to-Wire Connector Guidelines ETAD-H1023
4. Applicable insulation diameter : $\phi 0.98$ to $\phi 1.2$ mm.
- ⑤ Although the gate mark on the waterproof wire seal (part No.3) may be mounted upside down, there is no difference in performance.

1	PBT	UL94V-0(Black)	3	Silicone rubber	Gray		
2			2	Silicone rubber	Bengala		
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
	UNITS mm		SCALE 4:1	COUNT	DESCRIPTION OF REVISIONS		
					DESIGNED	CHECKED	DATE
APPROVED : SJ. OKAMURA 2025.01.14				DRAWING NO. EDC-408083-00-00			
CHECKED : HT. SATO 2025.01.14				PART NO. DF62WZC-3EP-2. 2C			
DESIGNED : YT. NIITSUMA 2025.01.10				CODE NO. CL0544-1126-0-00			
DRAWN : SK. CHIBA 2025.01.10							