

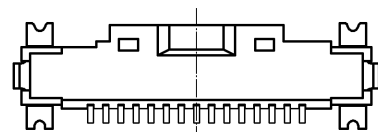
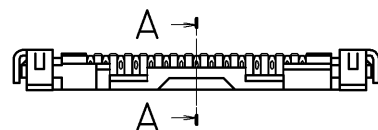



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

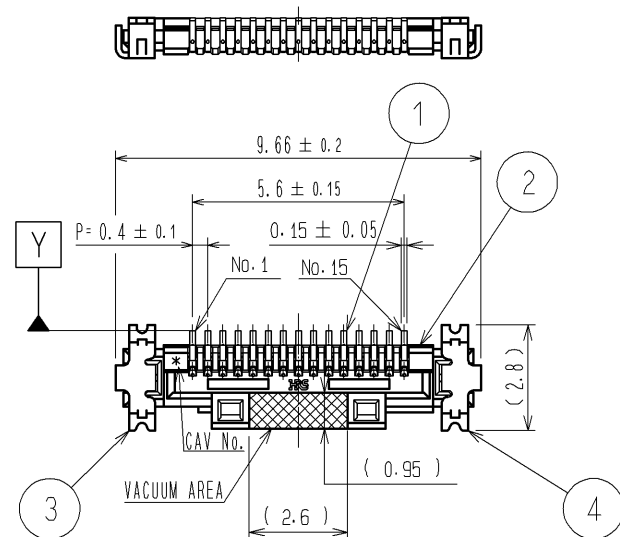


MATING FIGURE

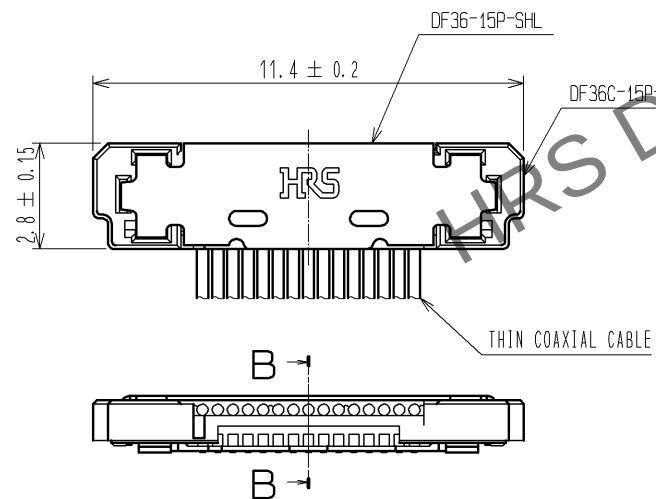

A-A (FREE)

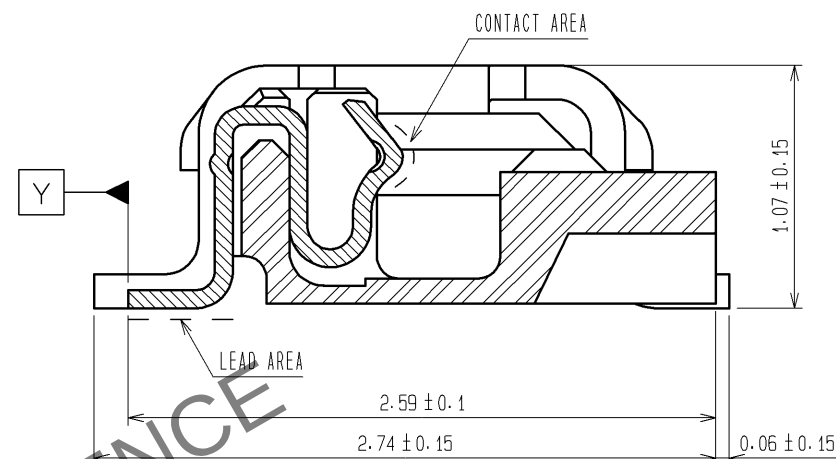

B-B (FREE)

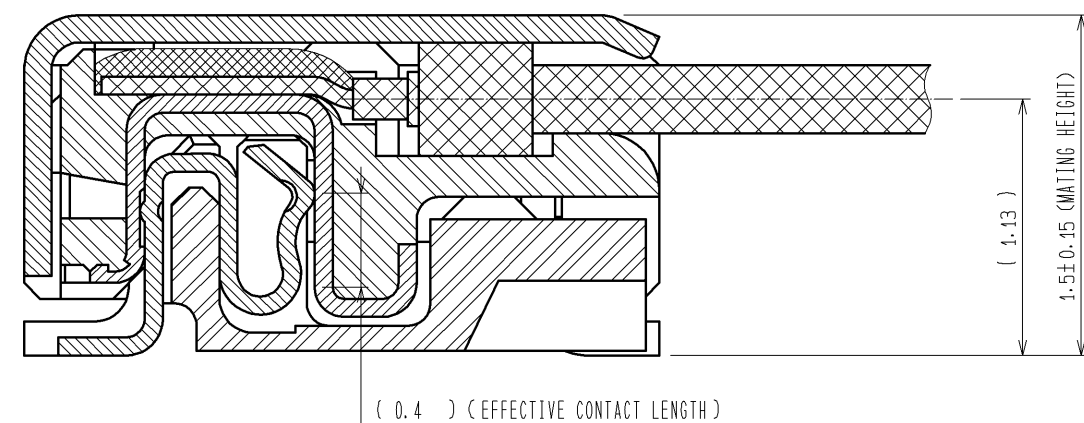

- NOTES
1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 2. STIFFENER IS REQUIRED FOR MOUNTING ONTO FPC IN ORDER TO AVOID STRESS BY FPC SLACKING TO MOUNTED CONNECTOR.
 3. UNMATING SHALL BE DONE WITH THE SPECIFIC EXTRACTION TOOL.

3	PHOSPHOR BRONZE	WHOLE AREA : Gold PLATING 0.1μm min UNDER PLATING : Nickel PLATING 2μm min	7	PS	BLACK
2	LCP	UL94V-0 , BLACK	6	POLYESTER	CLEAR
1	PHOSPHOR BRONZE	CONTACT AREA : Gold PLATING 0.3μm min LEAD AREA : Gold PLATING 0.1μm min UNDER PLATING : Nickel PLATING 2μm min	5	PS	CLEAR
4	PHOSPHOR BRONZE	WHOLE AREA : Gold PLATING 0.1μm min UNDER PLATING : Nickel PLATING 2μm min			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : KH. IKEDA		14.11.06	DRAWING NO.	EDC3-319532-02		
		CHECKED : MH. TSUCHIDA		14.11.06	PART NO.	DF36-15S-0.4V(55)		
		DESIGNED : IO. DENPOUYA		14.11.06	CODE NO.	CL662-4031-1-55		
		DRAWN : YJ. HAGA		14.10.23				1/1

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

