



May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

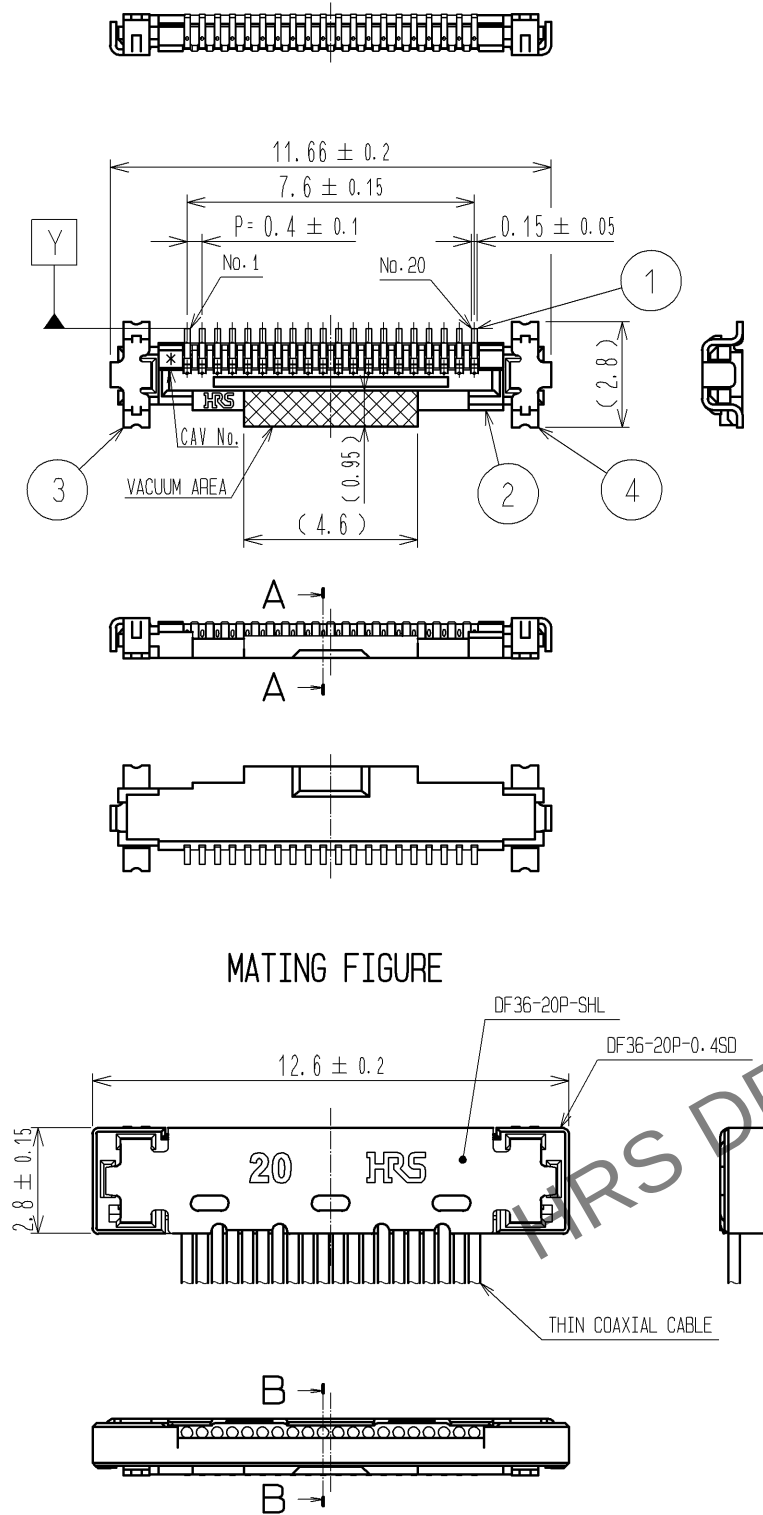


- NOTES
1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
 2. STIFFENER IS REQUIRED FOR MOUNTING ONTO FPC IN ORDER TO AVOID STRESS BY FPC SLACKING TO MOUNTED CONNECTOR.
 3. UNMATING SHALL BE DONE WITH THE SPECIFIC EXTRACTION TOOL.

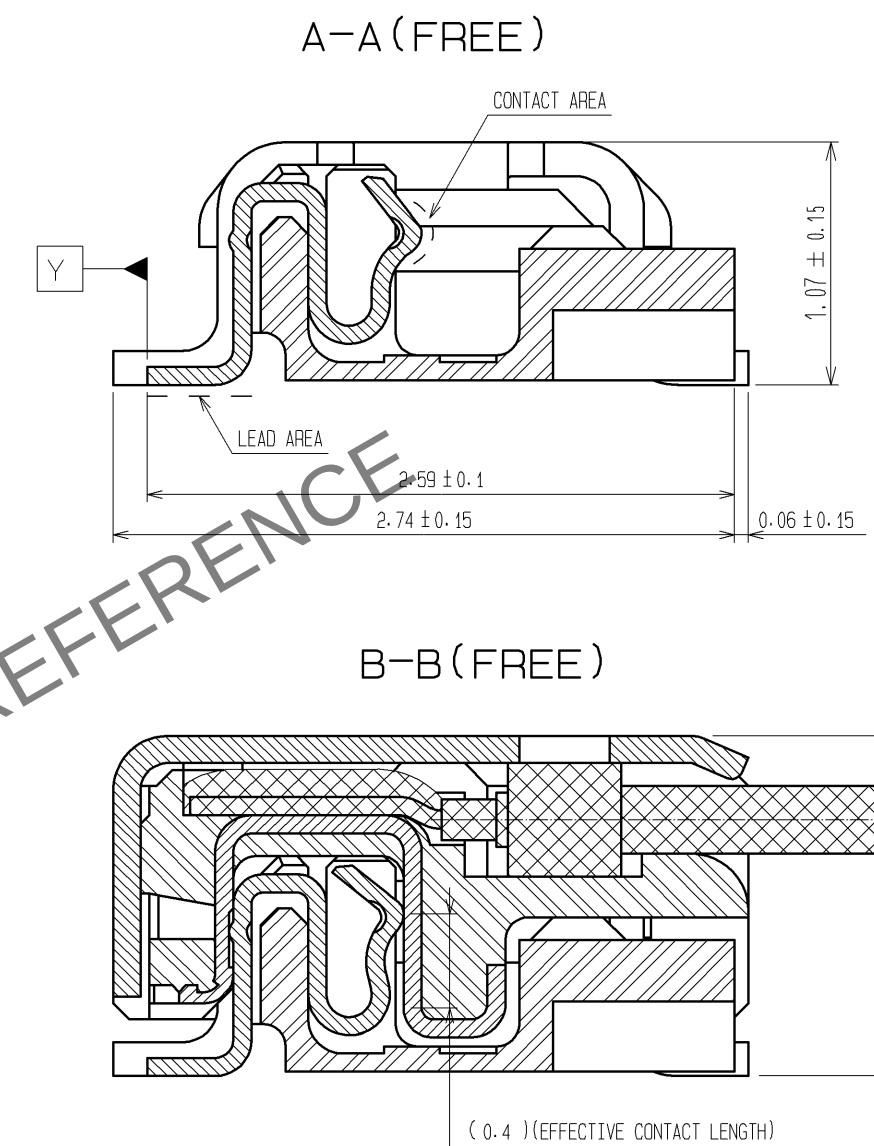

3	PHOSPHOR BRONZE	WHOLE AREA : Gold PLATING 0.1μm min UNDER PLATING : Nickel PLATING 2μm min	7	PS	BLACK
			6	POLYESTER	CLEAR
2	LCP	UL94V-0 . BLACK	5	PS	CLEAR
1	PHOSPHOR BRONZE	CONTACT AREA : Gold PLATING 0.3μm min LEAD AREA : Gold PLATING 0.1μm min UNDER PLATING : Nickel PLATING 2μm min	4	PHOSPHOR BRONZE	WHOLE AREA : Gold PLATING 0.1μm min UNDER PLATING : Nickel PLATING 2μm min
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS

UNITS mm		SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : KH. IKEDA	14.11.06	DRAWING NO.	EDC3-320369-01			
		CHECKED : MH. TSUCHIDA	14.11.06	PART NO.	DF36-20S-0.4V(55)			
		DESIGNED : IO. DENPOUYA	14.11.06	CODE NO.	CL662-4039-3-55			
		DRAWN : YJ. HAGA	14.10.23	 1/2				

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

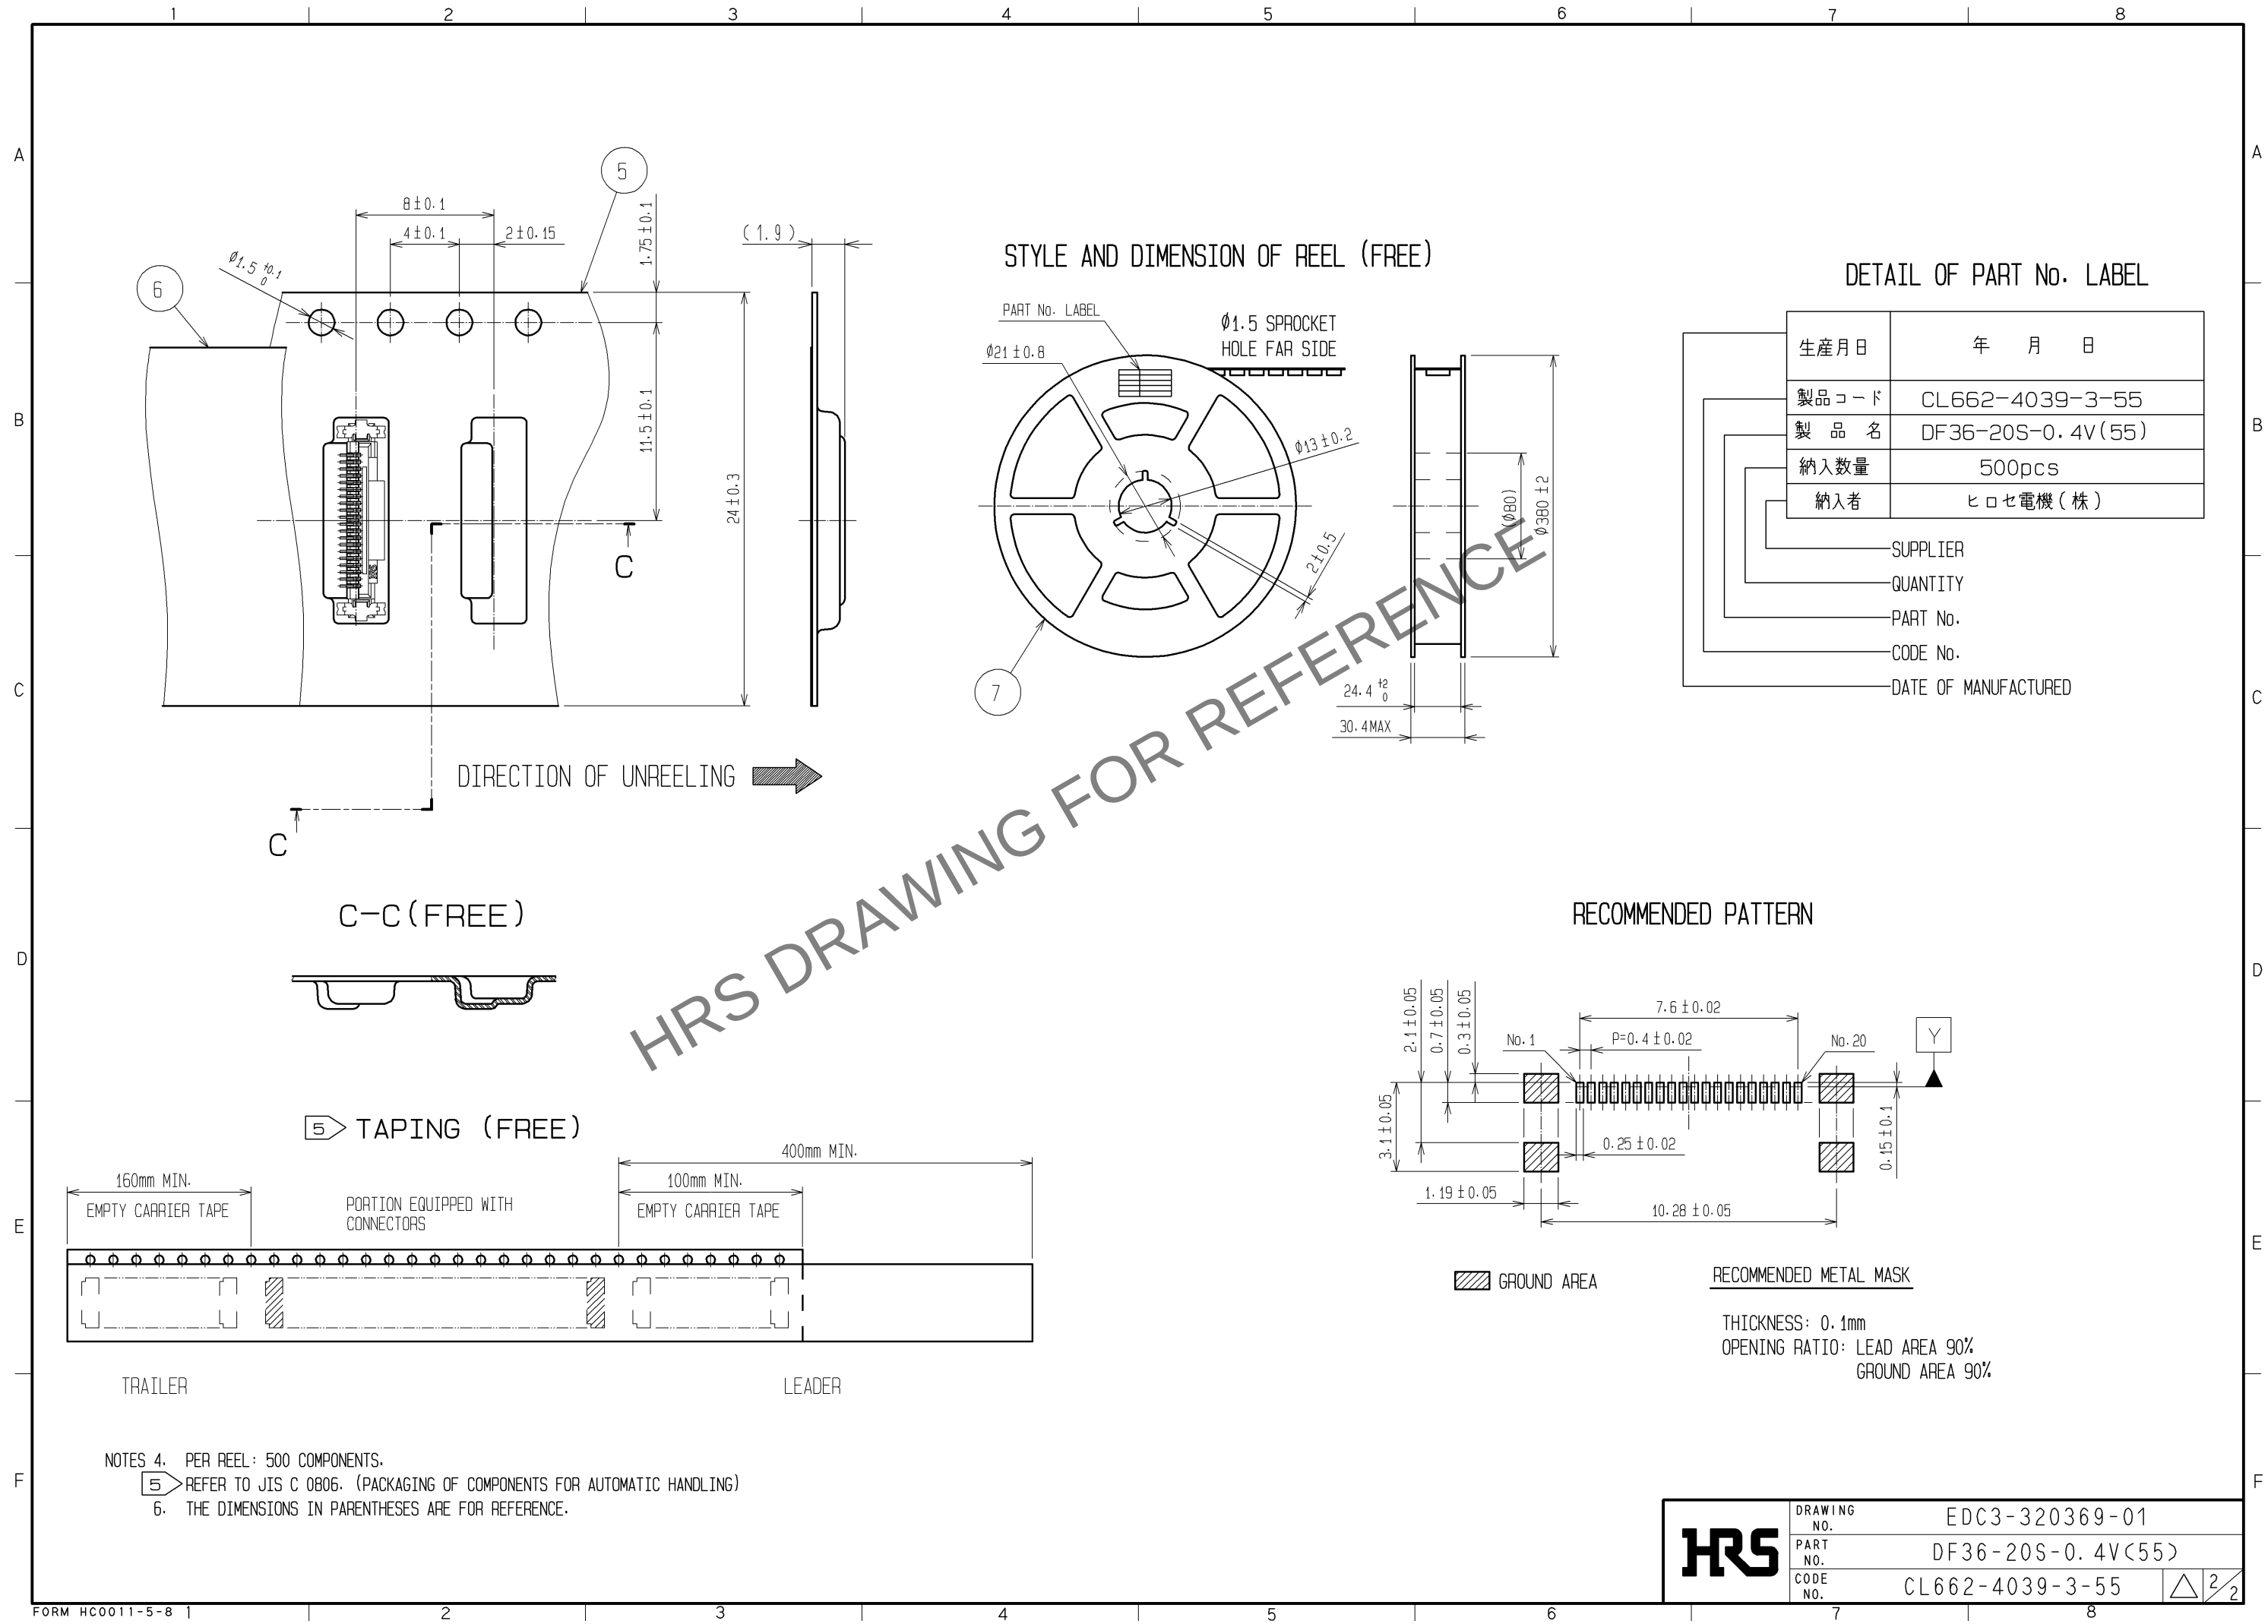

DRAWING NO.	EDC3-320369-01
PART NO.	DF36-20S-0.4V(55)
CODE NO.	CL662-4039-3-55