Sep.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

HRS DRAWING FOR REFERENCE

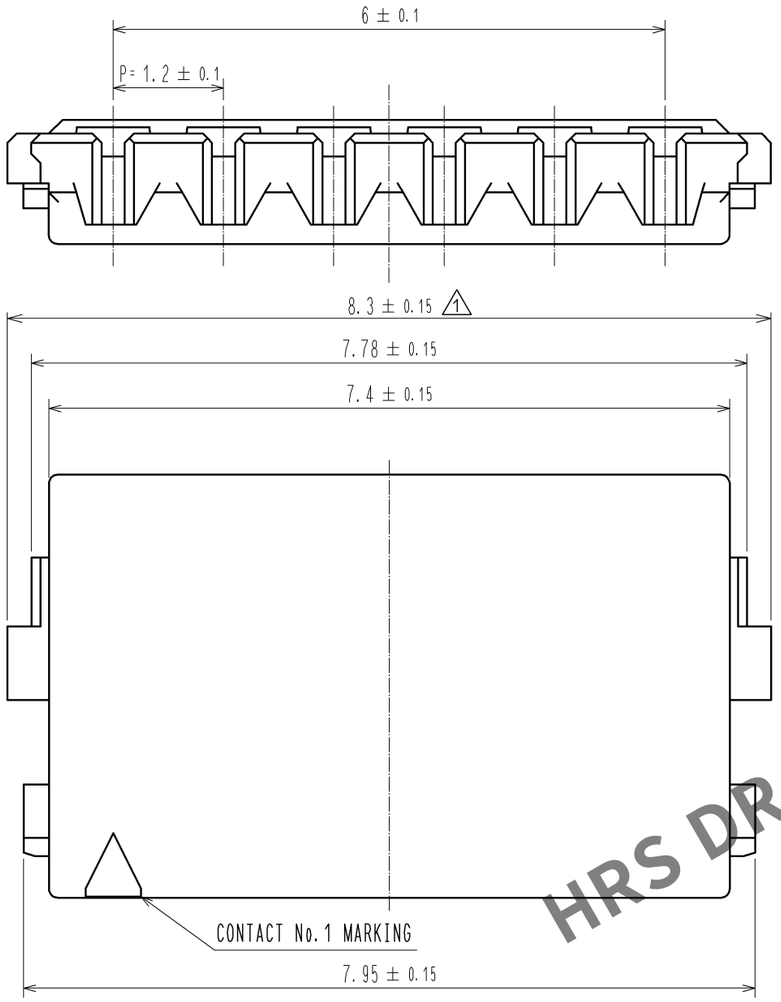

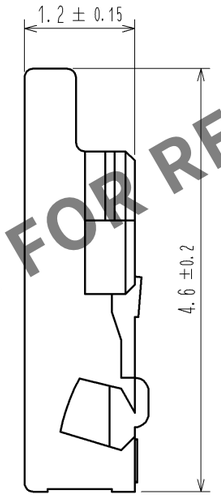

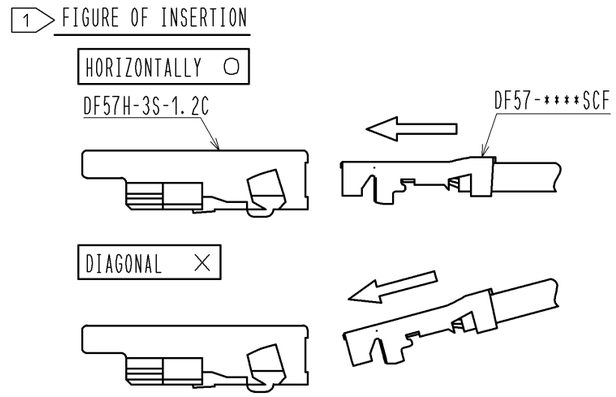

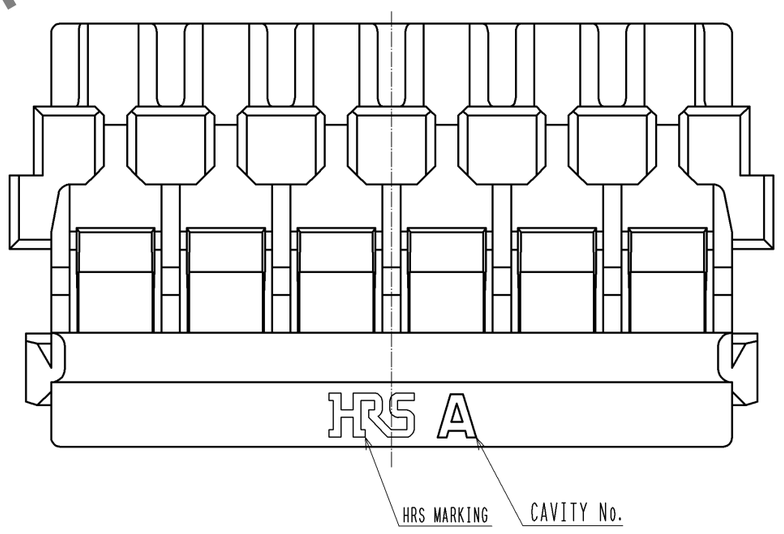

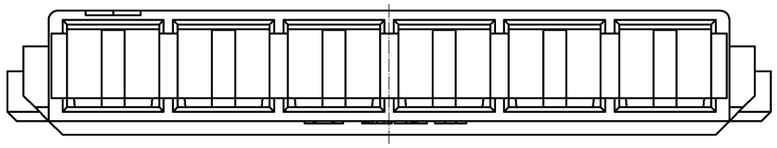

NOTE 1 AVOID ANGLED INSERTION OF CRIMP CONTACT(DF57-****SCF) TO MAINTAIN PERFORMANCE RELIABILITY.

NO.	MATERIAL	FINISH , REMARKS
1	PBT	UL94V-0, NATURAL(WHITE)

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	15 : 1	1	1	DIS-H-007826	TS. KUMAZAWA	HK. UMEHARA	13. 04. 08

HIROSE ELECTRIC CO., LTD.

APPROVED	KI. AKIYAMA	12. 02. 21
CHECKED	HK. UMEHARA	12. 02. 21
DESIGNED	TS. KUMAZAWA	12. 02. 20
DRAWN	TS. KUMAZAWA	12. 02. 20

DRAWING NO.	EDC3-343903-01
PART NO.	DF57H-6S-1.2C
CODE NO.	CL666-0103-4-00

1 1/2

DF57 Series Mating / Unmating Operation Instruction (For DF57 series)

Mating

①By positioning the convexity of the socket sides to the header concavity, align the centers of the socket and the header in pitch direftion.

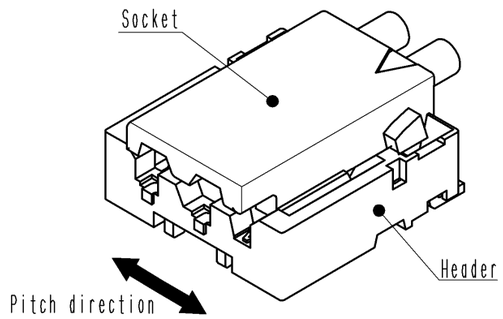

②Slightly press the socket down at cable side to tilted angle.

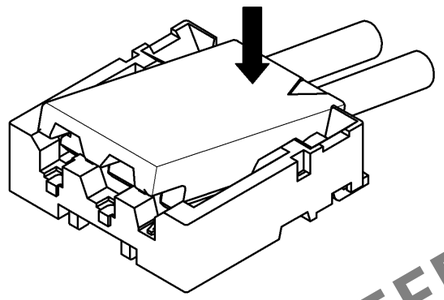

③Press down at the lever side with stabilizing t he cable side to insert. Mating completes.

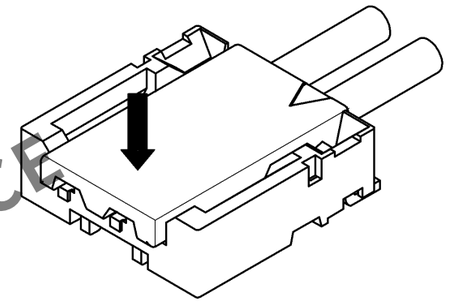

Unmating

①Hook the lever with finger nail.

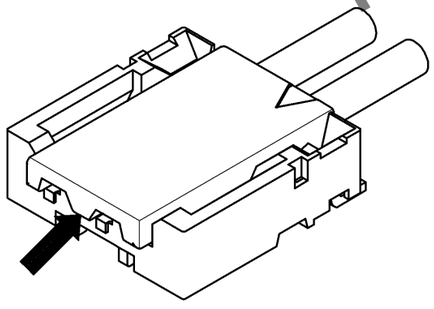

②Lift up to the upper difrection and friction lock is released.

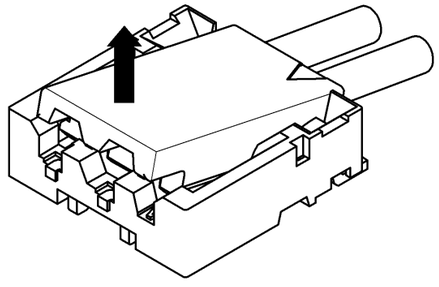

③Lift up to the upper direction and positive lock is released. Removal completes.

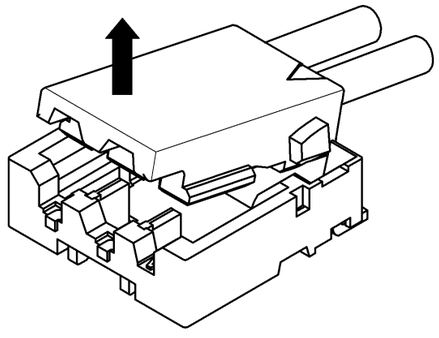

HRS DRAWING FOR REFERENCE

HRS	DRAWING NO.	EDC3-343903-01
	PART NO.	DF57H-6S-1.2C
	CODE NO.	CL666-0103-4-00 △1 2/2

Sep.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.