

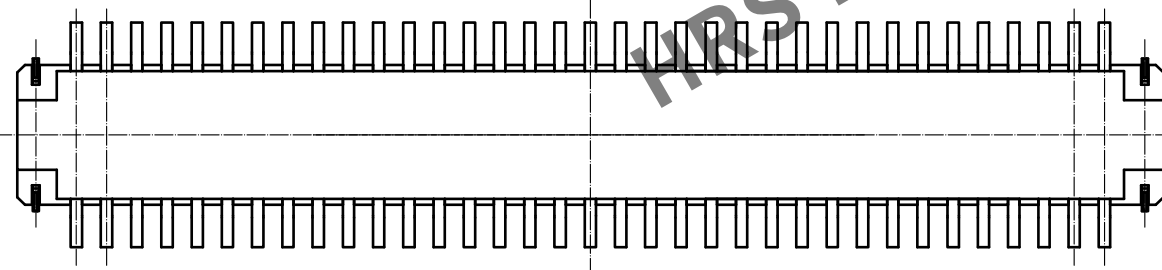
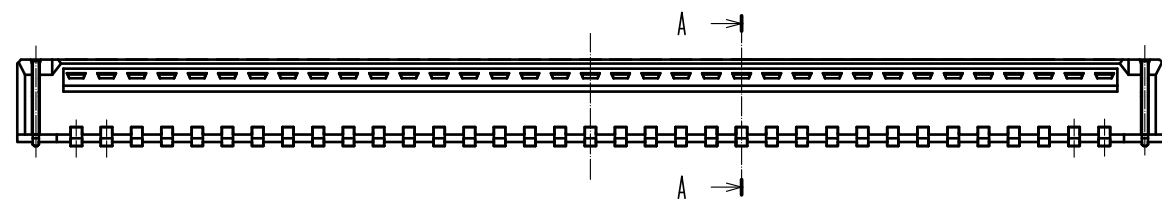




Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

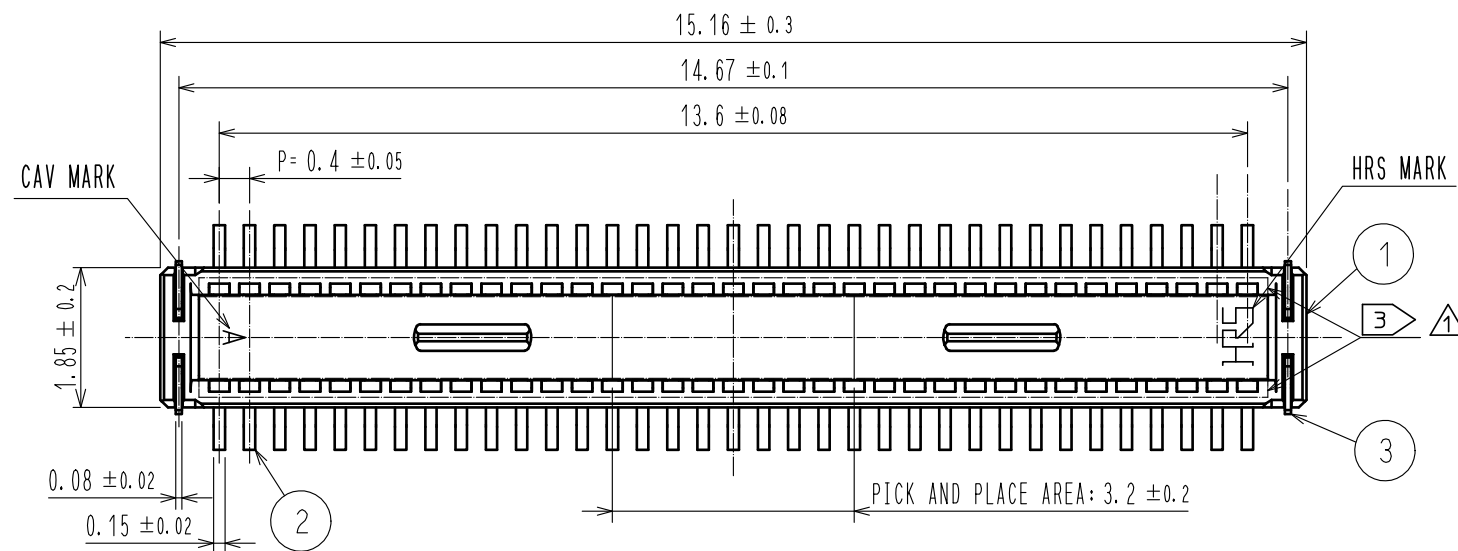


- NOTES
1. ALL LEADS METAL FITTINGS CO-PLANARITY SHALL BE 0.1mm MAX.
 2. IS NON-CONDUCTIVE AREA.
 3. THERE IS A POSSIBILITY THAT THE RESIN WILL BE EXPOSED AT THIS AREA. BUT THIS WILL NOT AFFECT THE CONTACT RELIABILITY.

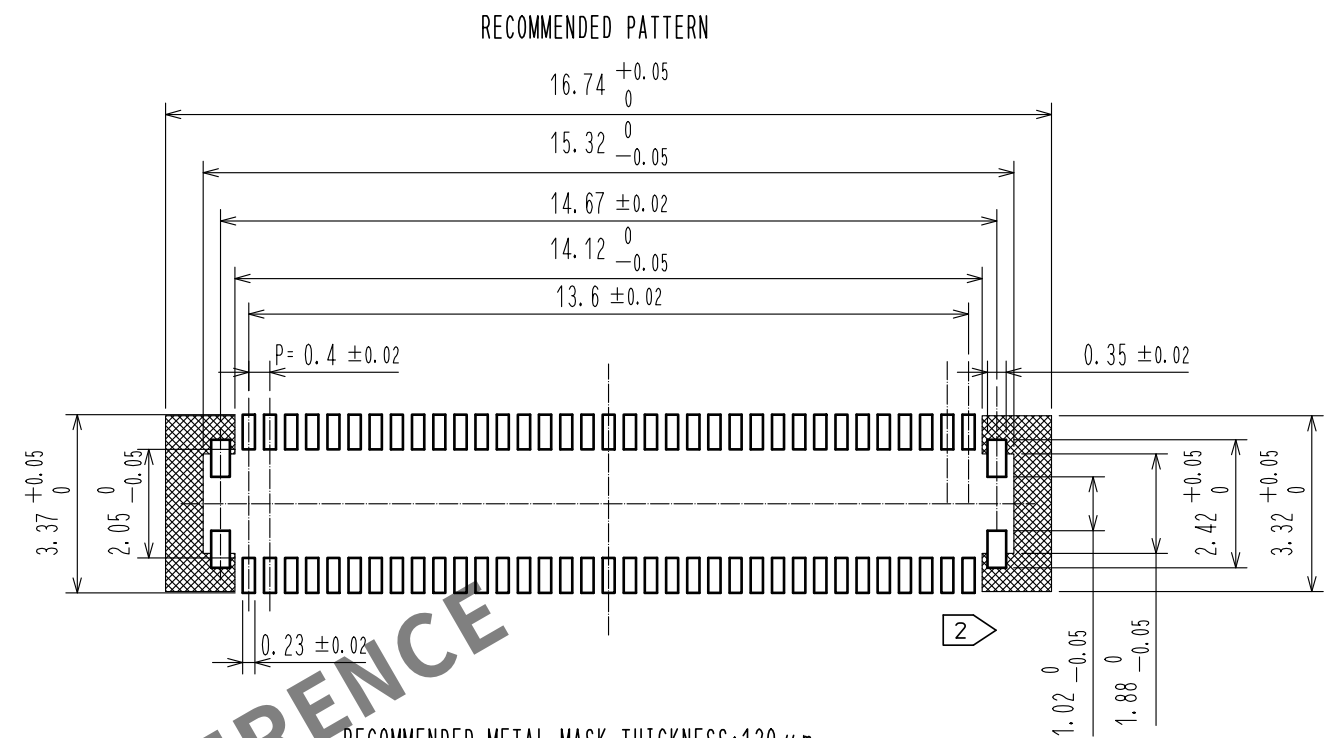

RECOMMENDED METAL MASK THICKNESS: $120 \mu\text{m}$
RECOMMENDED MASK OPENING RATIO: 80% FOR LEAD PAD

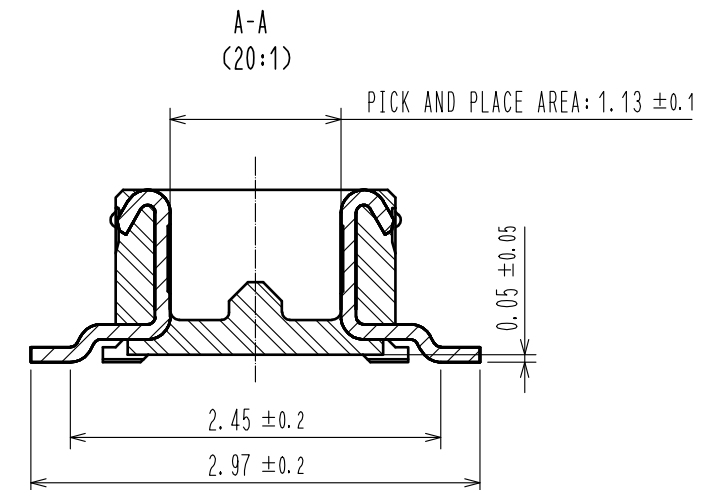

			7	PS	CLEAR(REINFORCEMENT COLLAR)		
			6	PS	BLACK(PLASTIC REEL)		
			5	POLYESTER	CLEAR(COVER TAPE)		
2	PHOSPHOR BRONZE	CONTACT AREA: Au 0.05 μm MIN	4	PS	CLEAR(EMBOSSED CARRIER TAPE)		
		SMT LEAD: Au 0.05 μm MIN	3	PHOSPHOR BRONZE	CONTACT AREA: Au 0.05 μm MIN		
		UNDERPLATING: NICKEL 1 μm MIN			SMT LEAD: Au 0.05 μm MIN		
1	LCP	BLACK, UL94V-0			UNDERPLATING: NICKEL 1 μm MIN		
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS		
UNITS mm		SCALE 10 : 1	COUNT  2	DESCRIPTION OF REVISIONS DIS-H-00006346	DESIGNED PAN YIWEI	CHECKED YK. SATAKE	DATE 20200928
 HIROSE ELECTRIC CO., LTD.		APPROVED : MO. ISHIDA	20150701	DRAWING NO. EDC-349576-58-01			
		CHECED : TS. MIYAZAKI	20150701	PART NO. DF40GB-70DP-0.4V(58)			
		DESIGNED : SH. HOSODA	20150701	CODE NO. CL684-4199-7-58			
		DRAWN : KR. AJITO	20150701	 			

