
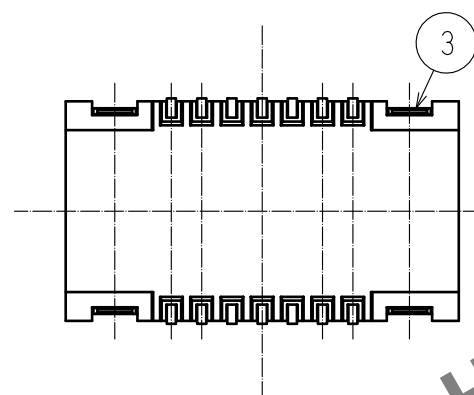
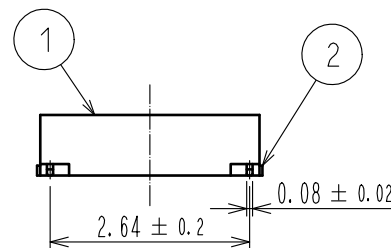


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

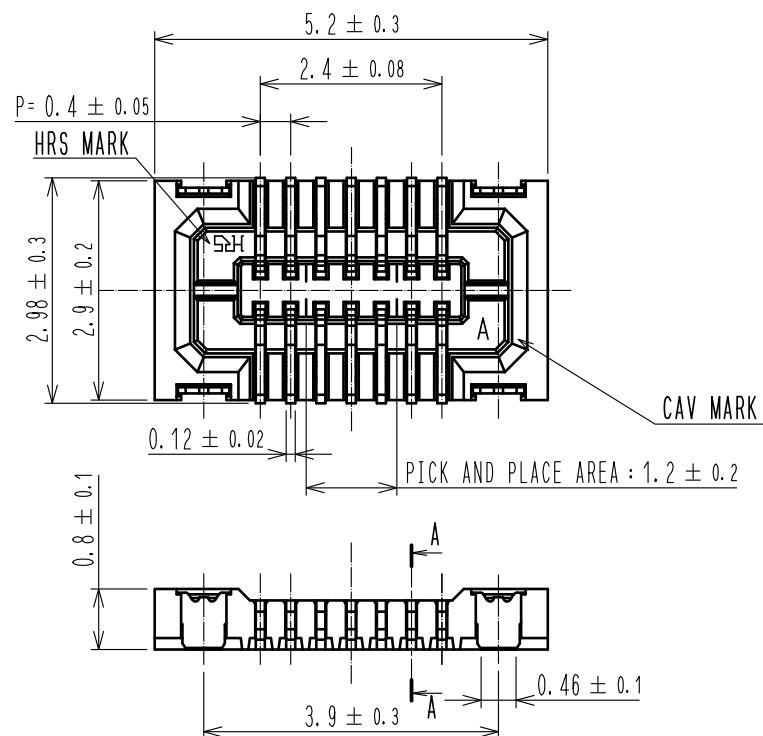

NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1mm MAX.

2 CONTACT PLATING SPECIFICATIONS.

CONTACT AREA : GOLD 0.05μm MIN.

SMT LEAD : GOLD 0.05μm MIN.

UNDERPLATING : NICKEL 1μm MIN.

(SURFACE : SEALING)


3 METAL HOLD DOWN PLATING SPECIFICATIONS.

MOUNTING AREA: GOLD 0.05μm MIN.

UNDERPLATING : NICKEL 1μm MIN.

4 PLEASE CONTACT US IN CASE YOU WILL MAKE
DIFFERENT SETTINGS FROM OUR RECOMMENDATION.


4 RECOMMENDED PATTERN

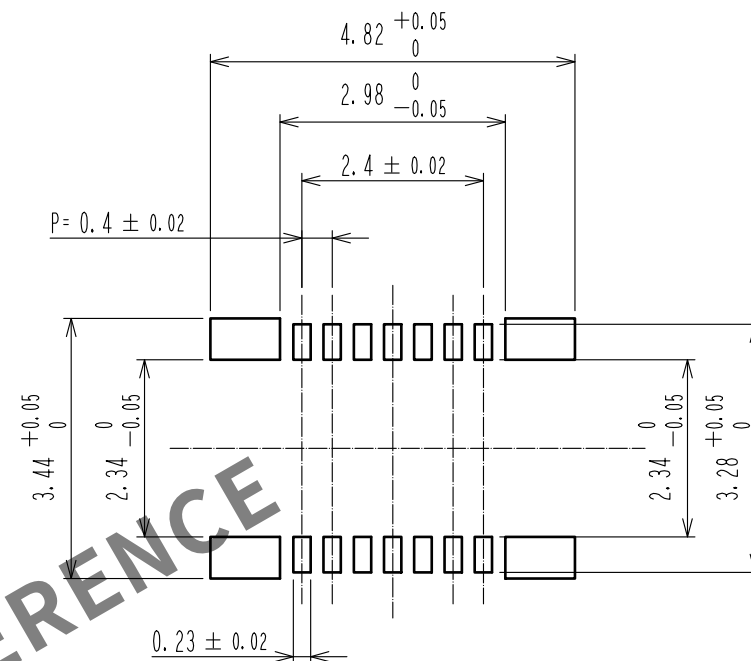


4 RECOMMENDED SOLDER PASTE : THICKNESS 120μm

4 RECOMMENDED METAL MASK OPENING RATIO : 100%

A-A

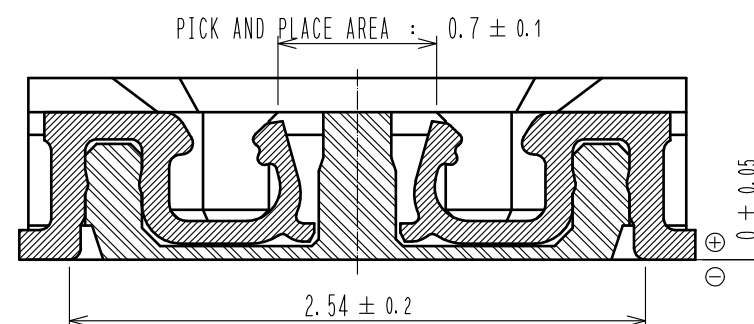

ENGAGEMENT FIGURE

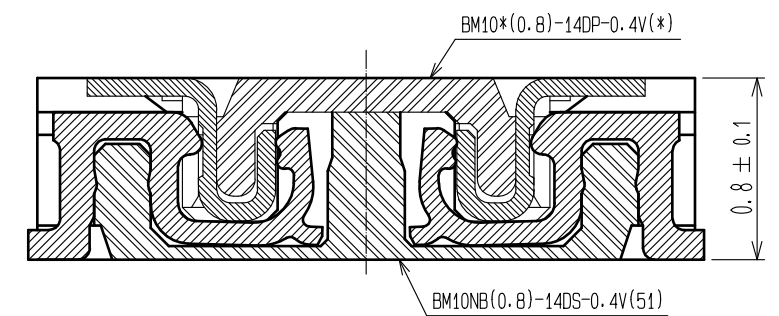

3	PHOSPHOR BRONZE	3	7	PS	CLEAR(REINFORCEMENT COLLAR)				
2	PHOSPHOR BRONZE	2	6	PS	BLACK(PLASTIC REEL)				
1	LCP	UL94V-0. BLACK	5	POLYESTER	CLEAR(COVER TAPE)				
			4	PS	CLEAR(EMBOSSD CARRIER TAPE)				
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE FREE	△	COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
HRS HIROSE ELECTRIC CO., LTD.		APPROVED	・MO. ISHIDA		16. 04. 26	DRAWING NO. EDC-322233-51-00			
		CHECKED	・TS. MIYAZAKI		16. 04. 26	PART NO. BM10NB(0. 8)-14DS-0. 4V(51)			
		DESIGNED	・NY. YAMASHIRO		16. 04. 26	CODE NO. CL684-6125-1-51			
		DRAWN	・SN. NUMAZAKI		16. 04. 25	△ 1/2			

HRS HIROSE
ELECTRIC
CO., LTD.

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

EMBOSSED CARRIER TAPE PACKAGING (FREE)

STYLE AND DIMENTION OF REEL (FREE)

B-B

PART No. LABEL

2 ± 0.5

Ø 21 ± 0.8

Ø 13 ± 0.2

Φ1.5 SPROCKET
HOLE FAR SIDE

DETEIL OF PART No. LABEL

SUPPLIER
QUANTITY
PART NO.
CODE NO.
DATE OF MANUFACTURED

生産月日	年 月 日
図番	CL684-6125-1-51
品名	BM10NB(0.8)-14DS-0.4V(51)
納入数量	8000個
納入者	ヒロセ電機(株)

E-E (FREE)

8 REINFORCEMENT COLLAR

TAPE AND REEL POCKET

TAPING

7

5. PER REEL 8000 CONNECTORS.

6. THE DIMINTIONS IN PARENTHESES ARE FOR REFERENCE.


7 REFER TO JIS C 0806, IEC 60286-3(PACKAGING OF COMPONENTS FOR AUTOMATIC HANDLING)

8 AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET. AND TAPE DOWN AT THE END THE COLLAR.

HRS

DRAWING NO.	EDC-322233-51-00
PART NO.	BM10NB(0.8)-14DS-0.4V(51)
CODE NO.	CL684-6125-1-51

2/2

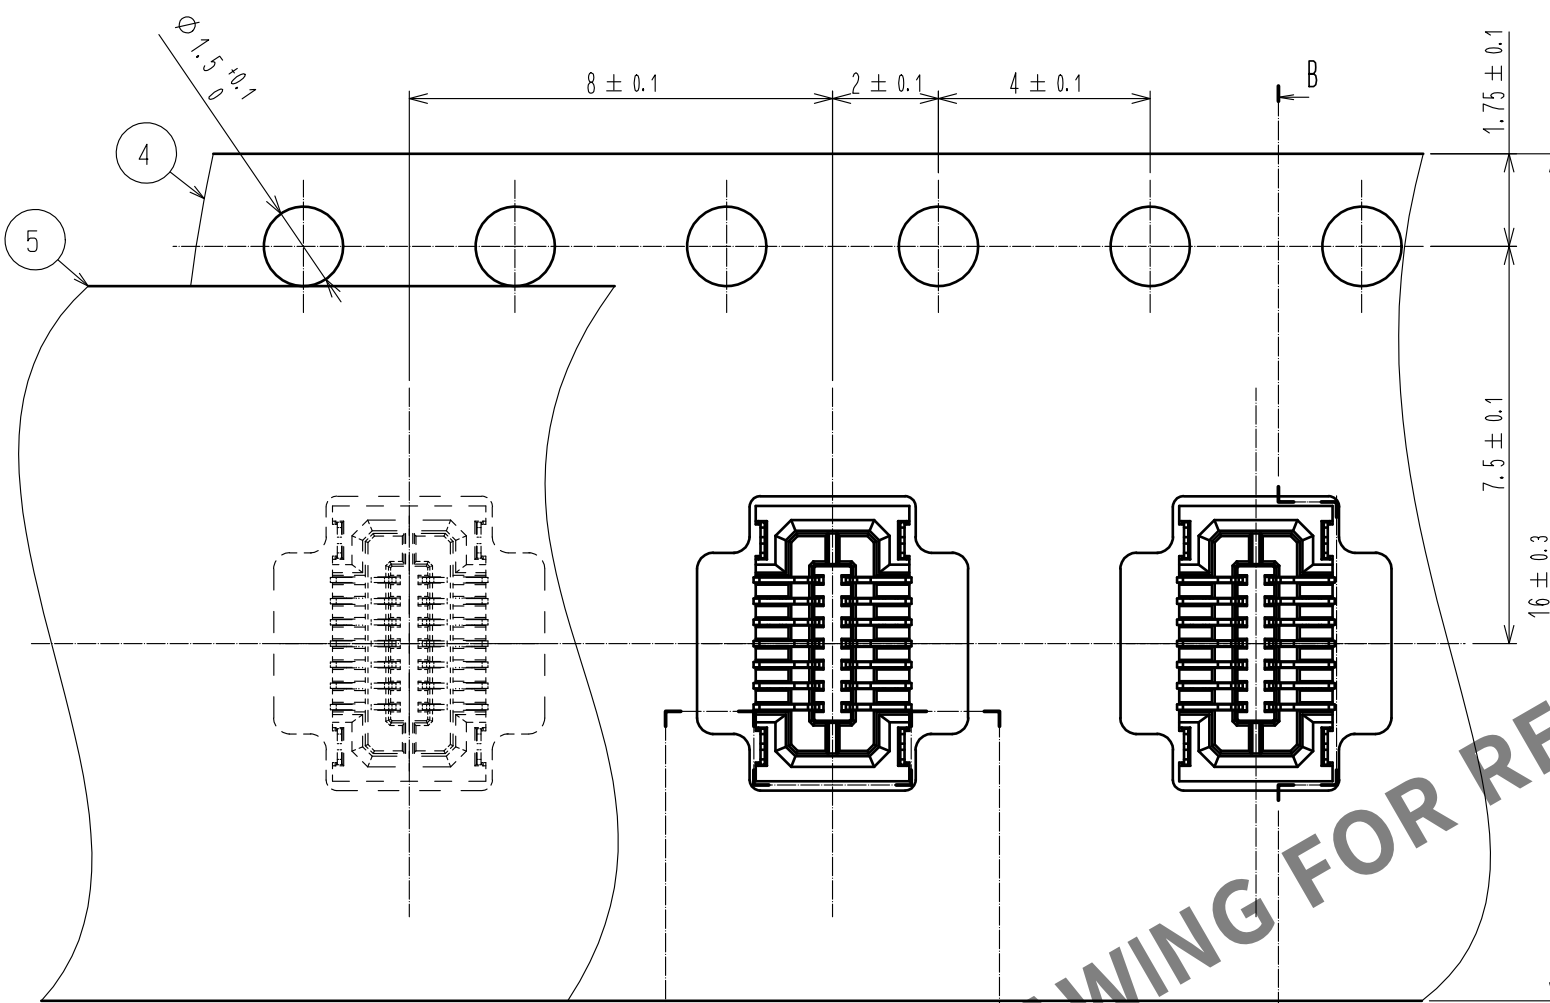


DIRECTION OF
UNREELING

C-C

D (10:1)

(0.1)

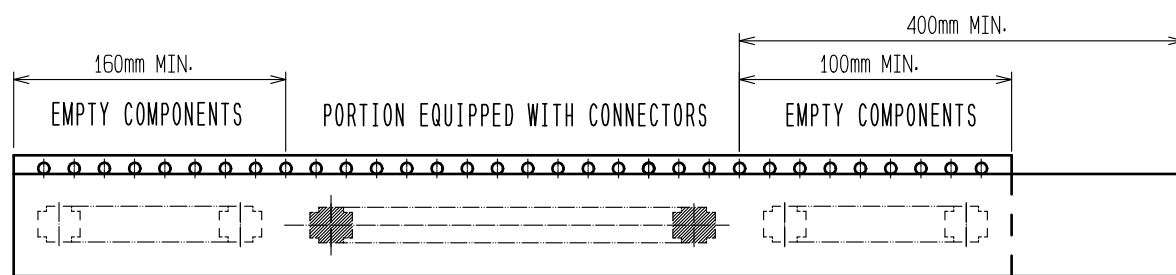

7 TAPING(FREE)

LEADER