


Apr.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV. RoHS COMPLIANT

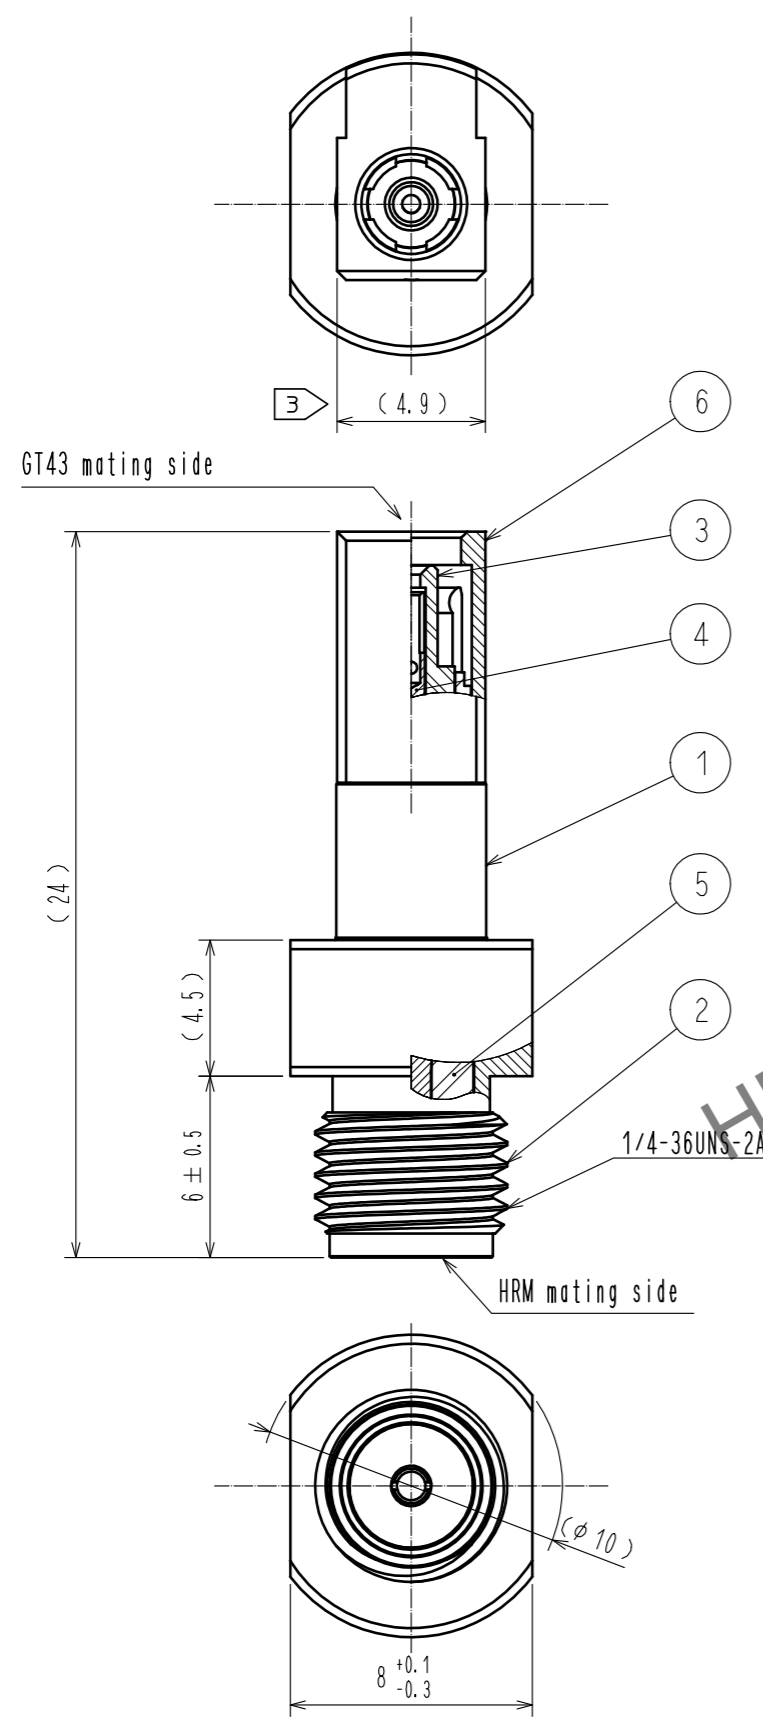

NOTES

1. This component is not equipped with a lock mechanism.
 Use only for the purpose of measurement.
 After the measurement is completed, remove the DUT immediately.
2. Insert/extract the mating partner straightly to the product mating port.
 There is a risk of damage the contact of the mating partner
 when performing diagonal insertion/extraction or rotational insertion/extraction.
- 3 (4.9) the radial positional relationship of the milling shape may differ from the drawing.
4. During measurement, do not apply load to the contact of the mating partner.

HRS DRAWING FOR REFERENCE

3	PTFE		6	Stainless steel	Passivation
2	Stainless steel	Passivation	5	PTFE	
1	Beryllium copper	Gold plating	4	Beryllium copper	Gold plating
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 4 : 1	COUNT 	DESCRIPTION OF REVISIONS	
HIROSE ELECTRIC CO., LTD.			APPROVED : KI. HIROKAWA 20210317	DRAWING NO. EDC-379876-00-00	
			CHECKED : MO. OKADA 20210317	PART NO. GT43S-HRMJ	
			DESIGNED : KN. MIKAMI 20210317	CODE NO. CL0753-1024-0-00	
			DRAWN : KN. MIKAMI 20210317	1/1	