


Dec.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

ELV, RoHS COMPLIANT





PACKAGING SPECIFICATION

(1) 100pcs parts are contained in a plastic bag.
 (2) 5 plastic bags are contained in a carton. (total 500 pcs in one carton)
 (3) Close the box and seal with packing tape.

W= (349) mm
 D= (258) mm
 H= (118) mm

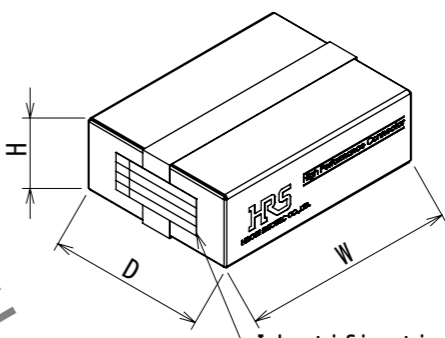




Identification label

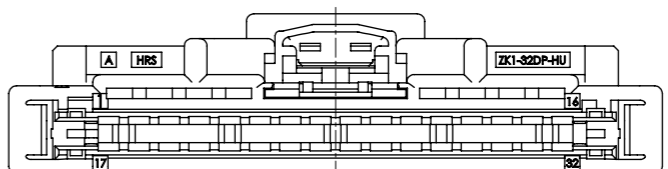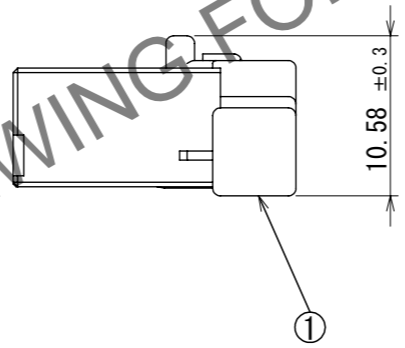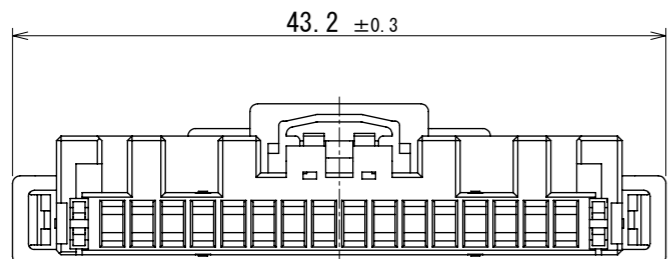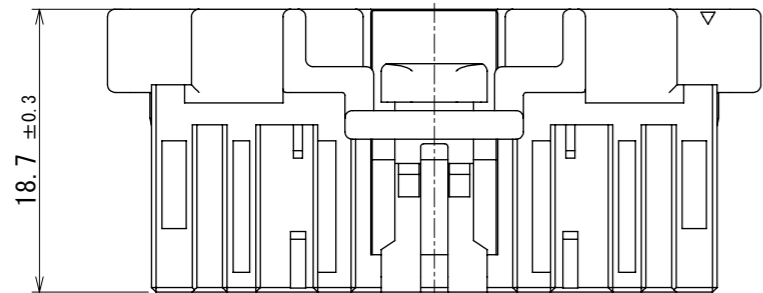


△ Correction of pin No.


NOTE1. RETAINER ZK1-32DP-R (CL755-2201-0-00) SHOULD BE USED.

| 1 | PA | BLACK | | | | | | |
|---|---|------------|--------------|--------------------------|---|-----------|-------------|--------------|
| NO. | MATERIAL | FINISH | REMARKS | NO. | MATERIAL | FINISH | REMARKS | |
| UNITS |  | SCALE | COUNT | DESCRIPTION OF REVISIONS | | DESIGNED | CHECKED | DATE |
| mm | | 2:1 | 1 | DIS-T-00020122 | | AN. SAIKI | HH. TSUKUMO | 2024. 02. 09 |
|  HIROSE ELECTRIC CO., LTD. | | APPROVED : | AH. EDASHIGE | 2023. 10. 23 | DRAWING NO. EDC-397752-00-00 | | | |
| | | CHECKED : | HH. TSUKUMO | 2023. 10. 23 | PART NO. ZK1-32DP-HU | | | |
| | | DESIGNED : | TS. SHIMIZU | 2023. 10. 23 | CODE NO. CL0755-2200-0-00 | | | |
| | | DRAWN : | MA. TAGUCHI | 2023. 10. 23 |  1/2 | | | |

Dec.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

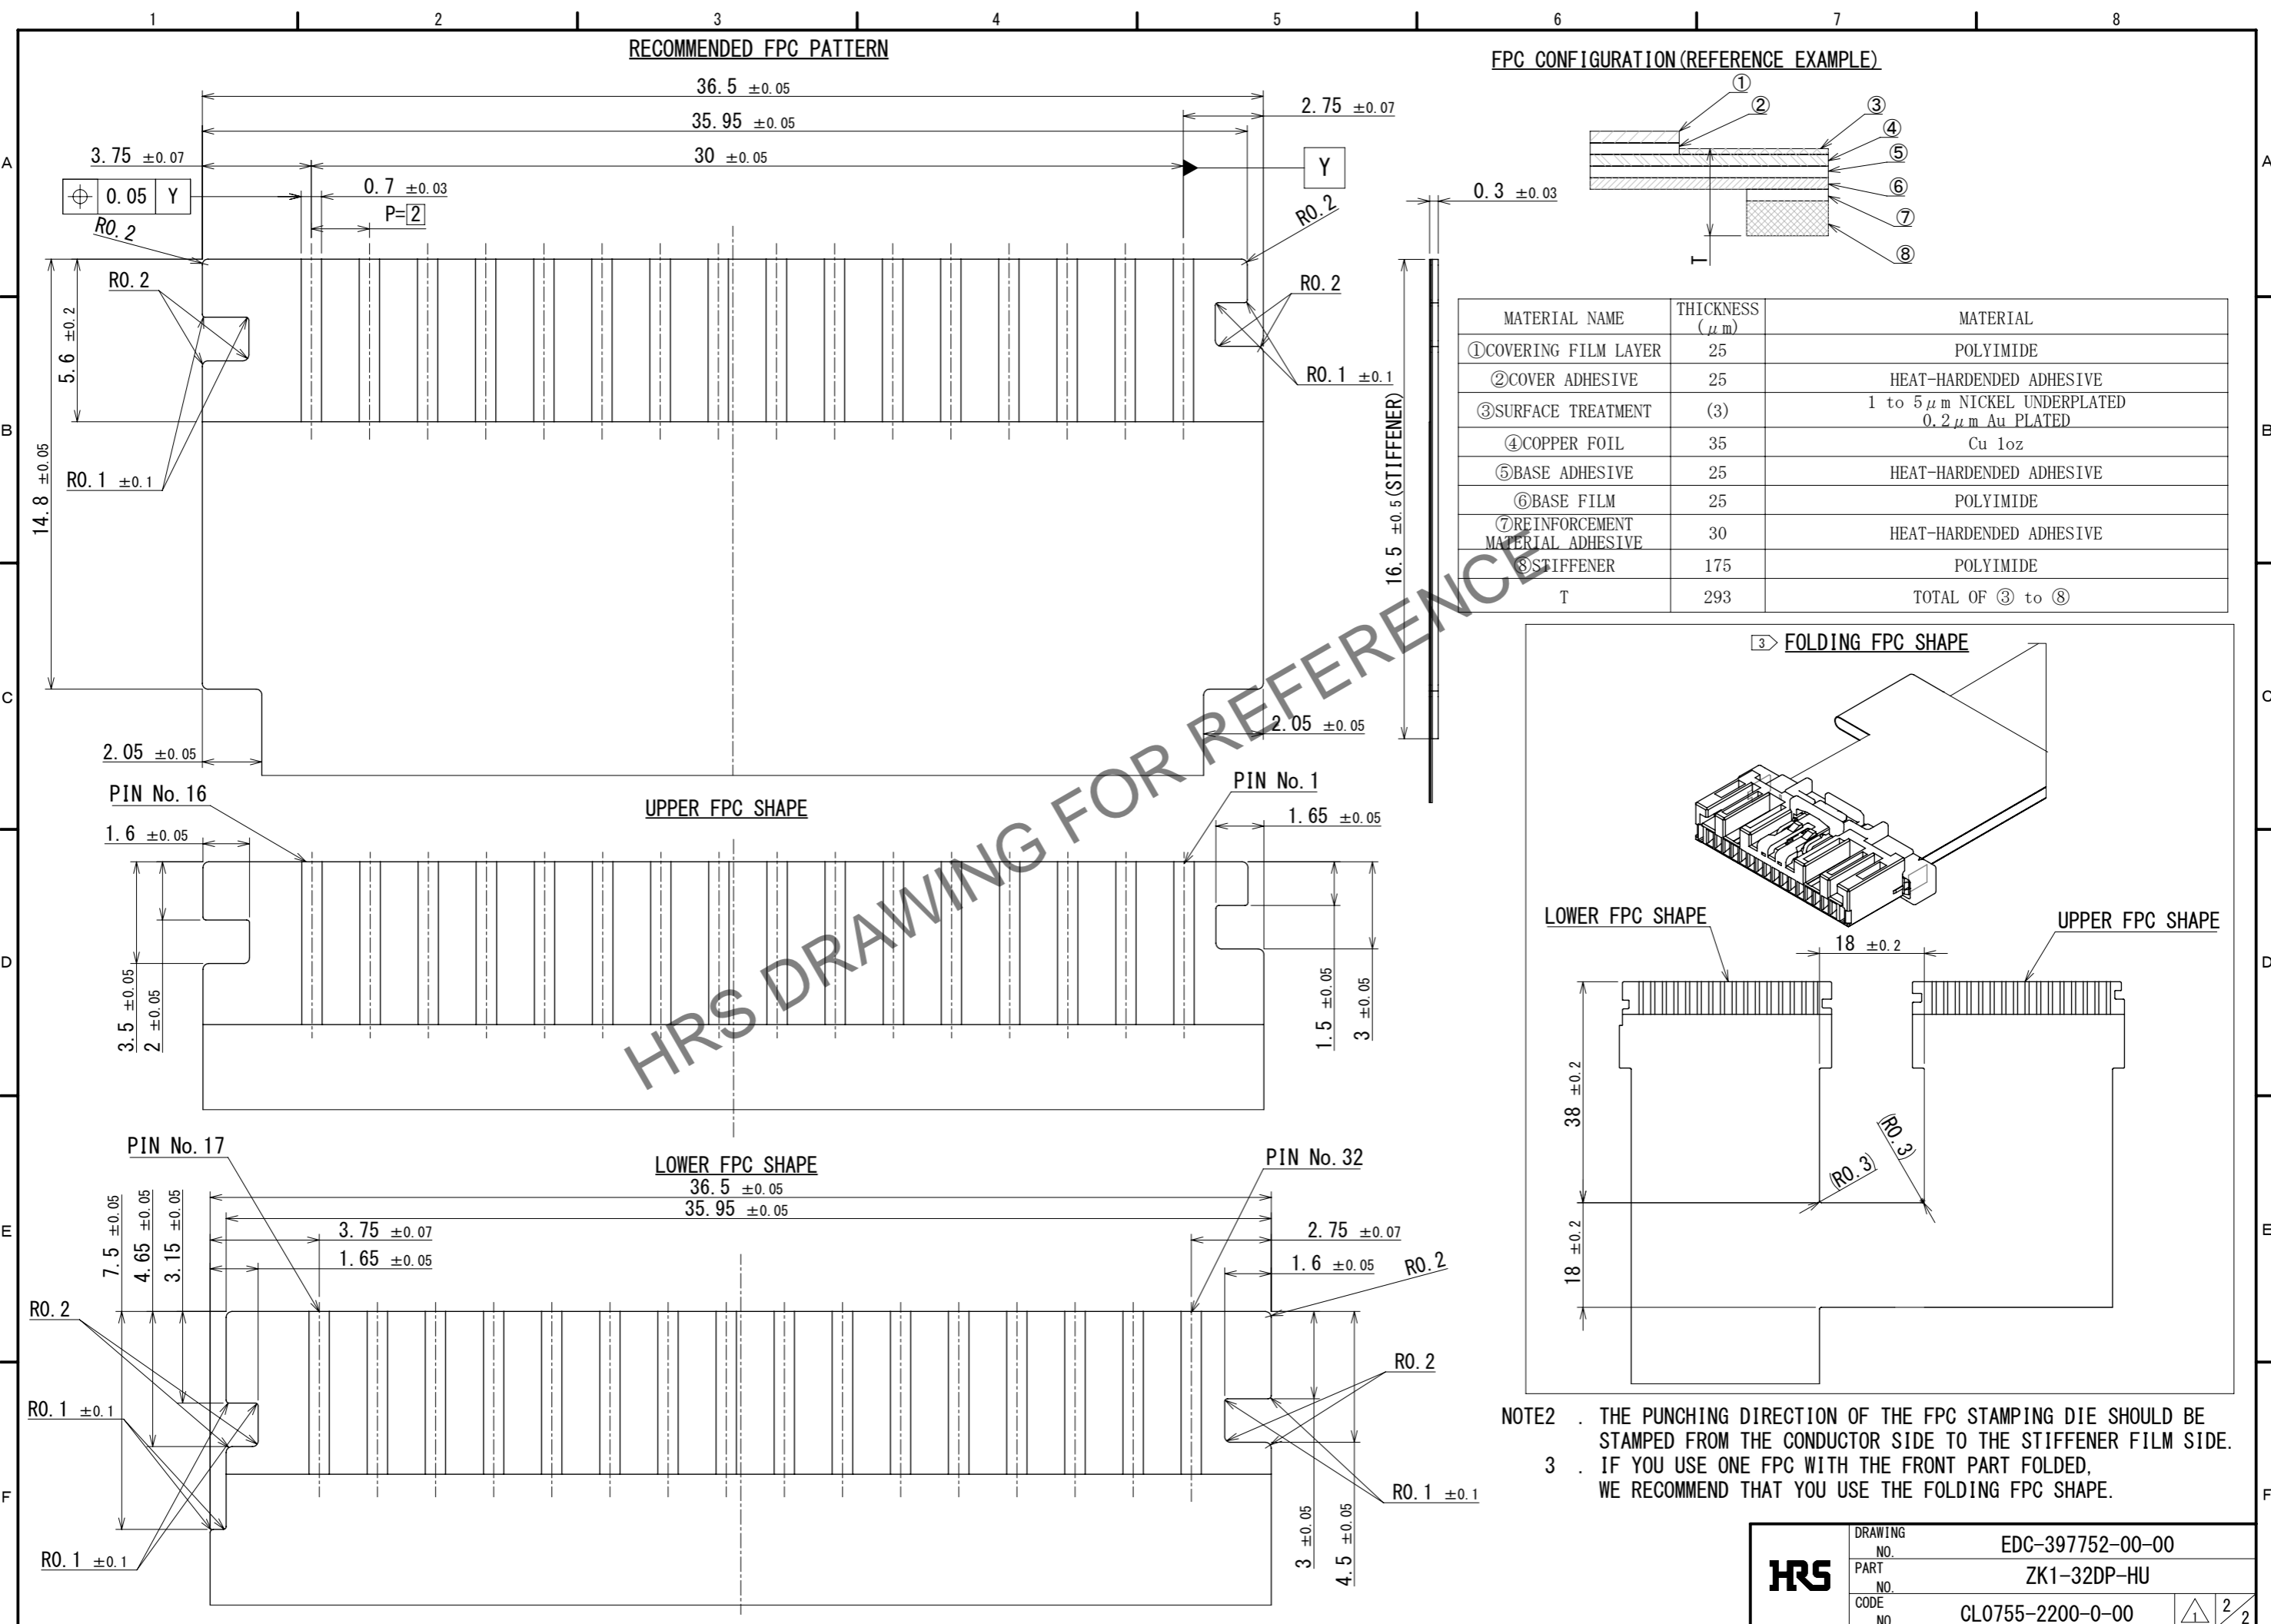

| MATERIAL NAME | THICKNESS (μm) | MATERIAL |
|----------------------------------|----------------|--|
| ①COVERING FILM LAYER | 25 | POLYIMIDE |
| ②COVER ADHESIVE | 25 | HEAT-HARDENED ADHESIVE |
| ③SURFACE TREATMENT | (3) | 1 to 5 μm NICKEL UNDERPLATED 0.2 μm Au PLATED |
| ④COPPER FOIL | 35 | Cu 1oz |
| ⑤BASE ADHESIVE | 25 | HEAT-HARDENED ADHESIVE |
| ⑥BASE FILM | 25 | POLYIMIDE |
| ⑦REINFORCEMENT MATERIAL ADHESIVE | 30 | HEAT-HARDENED ADHESIVE |
| ⑧STIFFENER | 175 | POLYIMIDE |
| T | 293 | TOTAL OF ③ to ⑧ |

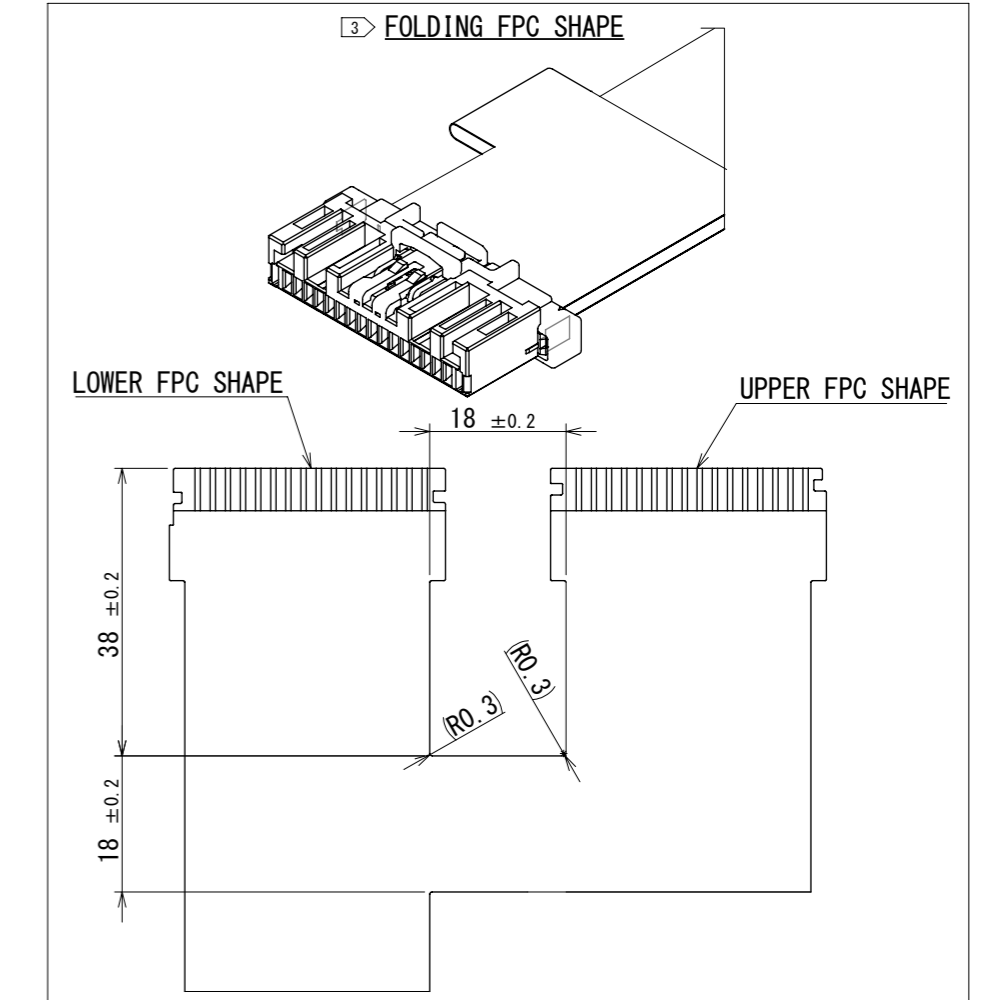

NOTE2 . THE PUNCHING DIRECTION OF THE FPC STAMPING DIE SHOULD BE STAMPED FROM THE CONDUCTOR SIDE TO THE STIFFENER FILM SIDE.
3 . IF YOU USE ONE FPC WITH THE FRONT PART FOLDED, WE RECOMMEND THAT YOU USE THE FOLDING FPC SHAPE.

| | | |
|------------|-------------|------------------|
| HRS | DRAWING NO. | EDC-397752-00-00 |
| | PART NO. | ZK1-32DP-HU |
| | CODE NO. | CL0755-2200-0-00 |
| | | 2/2 |