


Jun.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

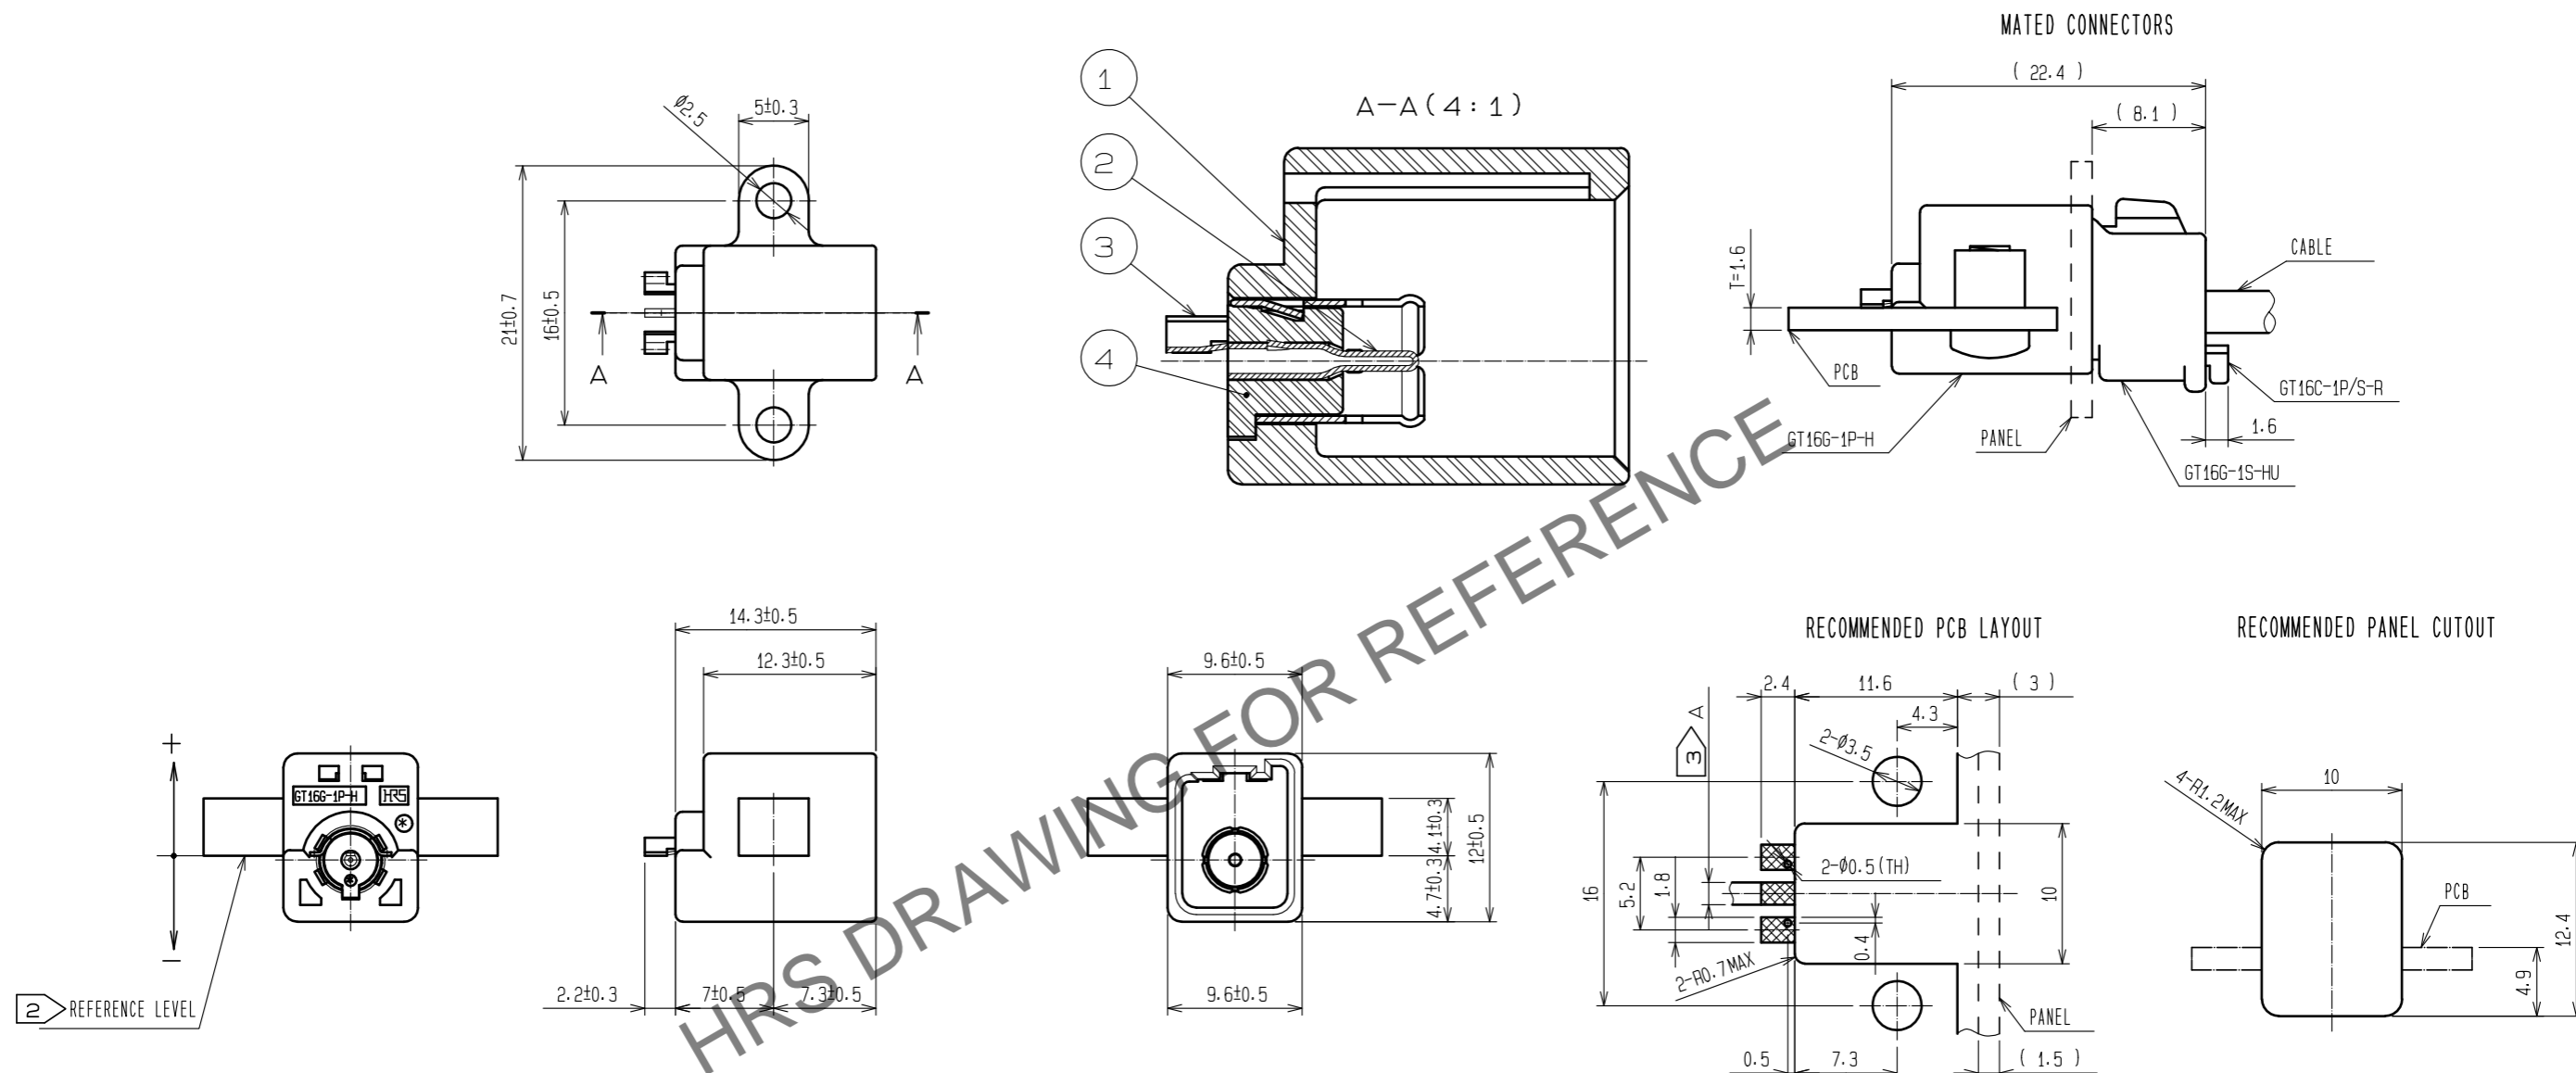


REFERENCE LEVEL

HRS DRAWING FOR REFERENCE

NOTE1. FIXING SCREW SHALL BE IN ACCORDANCE WITH ISO 1481 OR 7049, NOMINAL DIAMETER 3, AND LENGTH 6.

- ② SMT DIMENSION OF LEAD AREA FROM THE REFERENCE LEVEL IS $0^{+0.15}_{-0.25}$
- ③ A MUST BE TAKEN TO OBTAIN IMPEDANCE CHARACTERISTIC OF 50Ω

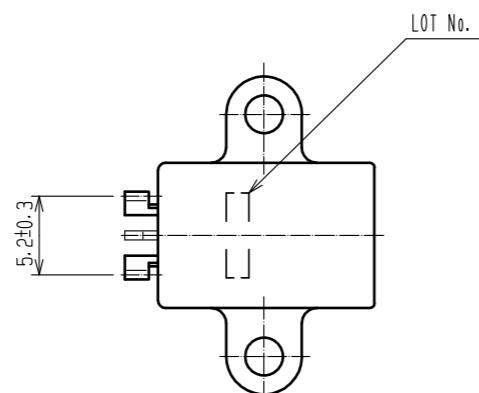

2	PHOSPHOR BRONZE	TIN PLATING	4	PBT	NA
1	PBT	LIGHT GRAY	3	PHOSPHOR BRONZE	TIN PLATING
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS	
mm		2 : 1		DESIGNED	CHECKED
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : KI. HIROKAWA	20200327	DRAWING NO. EDC-165983-55-00	
		CHECKED : MO. OKADA	20200327	PART NO. GT16G-1P-H(55)	
		DESIGNED : NK. IKUTA	20200327	CODE NO. CL766-0021-0-55	
		DRAWN : YK. MITSUISHI	20200318		