# **USB3.0 Micro-B Connector**

ZX360 Series





## General

The ZX360 Series is a Micro-USB connector that is compliant with the MicroUSB 3.0 specifications and supports up to 5Gbps high speed data transmission.

As a next-generation interface, this series functions well for various small sized devices.

## Features

### 1.Supports high-speed USB 3.0 transmissions

In comparison to the MicroUSB 2.0 connectors, the maximum transfer speed has drastically increased from 480Mbps to 5Gbps, delivering 10 times the transfer speed.

# 2. Fully supports MicroUSB 2.0

Supports the plug used in MicroUSB 2.0


# 3. Design provides a smoother mating cycle and a longer life

With the extensive data and experience compiled from the previous MicroUSB 2.0 ZX series connectors, the unique new active latch (lock) mechanism delivers a clear tactile click that does not diminish after repeated use.

# 4. Micro-USB 3.0 certification (TID number) acquired

#### 5. RoHS compliant, halogen-free product\*

\* ZX360 series is halogen-free product (Maximum content of Br, CI and Br+CI total are 900ppm, 900ppm and 1500ppm, respectively.)

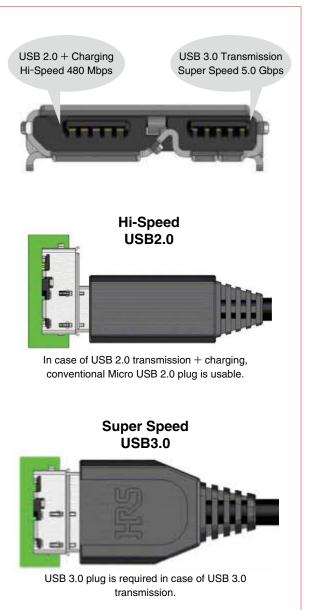

### Product Specifications

|  | Detect 1A/contact : When all contacts (No. 1 to 10) are for signal          |   | Rated Voltage 30V AC                                       |                         |  |  |
|--|---|---|--|-------------------------|--|--|
| Ratings                                    | Rated   | 1.8A/contact for power contact (No. 1.8.5) and 0.5A/contact |  | -30°C to +85°C (Note 1) |  |  |
|  | Ourient   | for others (No. 2 to 4, 6 to 10).                           | Storage Temp. Range  | −30°C~+60°C             |  |  |
| Itama                                      |   | Cracifications  | Con  | Conditions              |  |  |
| Items                                      |   | Specifications  | CON  | ultions                 |  |  |
| 1. Contact<br>resistance                   | 30mΩ max.   |   | Measured at 100mA  |                         |  |  |
| 2. Withstand voltage                       | No flashover or breakdown   |   | 100V AC / 1min   |                         |  |  |
| 3. Capacitance                             | 2 pF or less  |   | Between adjacent contacts with 1,000Hz alternative voltage |                         |  |  |
| 4. Durability                              | Contact resistance : Increase by $10m\Omega$ or less from the initial value |   | 10,000 mating cycles                                       |                         |  |  |
| 5. Overall insertion/<br>extraction forces | Insertion : 35N max.<br>Extraction : 8N min.                                |   | Measured with applicable connector                         |                         |  |  |

Note 1 : Includes temperature rise caused by current flow.

Note 2 : The above specifications are representative of this series.

Hirose does not guarantee specified performance when mating with other maker's parts.

### Materials / Finish

#### Receptacle

| Parts     | Materials       | Color/Finish                            |
|-----------|-----------------|---|
| Insulator | LCP             | Black/UL94V-0                           |
| Contact   | Copper alloy    | Nickel-palladium plating + Gold plating |
| Shell     | Stainless steel | Tin plating                             |

#### ●Plug

| Parts                  | Materials       | Color/Finish   |  |
|------------------------|-----------------|--|--|
| Insulator              | LCP             | Black/UL94V-0  |  |
| Contact                | Copper alloy    | Contact area : Gold plating (nickel under plating)<br>Mounting area : Tin plating (nickel under plating) |  |
| Lock spring            | Stainless steel | -  |  |
| Shield Stainless steel |                 | Nickel plating   |  |

Note : The above data is representative of this series. Data may vary according to specifications.

### Product Number Structure

Refer to the chart below when determining the product specifications from the product number. Please select from the product numbers listed in this catalog when placing orders.

#### Receptacle


| <u>ZX</u> | <u>3</u><br>2 | <u>60</u><br><u></u> | <b>D</b><br>4 |               | <u>В</u> |         | <u>10</u> | <b>P</b> |      |
|-----------|---------------|----------------------|---------------|---------------|----------|---------|-----------|----------|------|
| ●Plu      | g             |                      |               |               |          |         |           |          |      |
| ΖX        | 3             | 60                   | _             | В             | _        | 10      | S         | -        | UNIT |
| 1         |               | 3                    |               |               |          | 6       | 7         |          | 8    |
| <u>ZX</u> |               | <u>60</u><br>ම       | <b>-</b>      | <b>B</b><br>6 | -        | SL<br>® |           |          |      |

| Series name                          |                          | ZX                               |  |
|--------------------------------------|--------------------------|----------------------------------|--|
| Osupported transm                    | 2 Supported transmission |                                  |  |
|                                      | None                     | USB 2.0 compliant                |  |
|                                      | 3                        | USB 3.0 compliant                |  |
| Wiring style                         |                          |                                  |  |
|                                      | 60                       | Right angle SMT                  |  |
| Mounting form of<br>receptacle shell | D                        | Dip style                        |  |
| 6Mating key shape                    | В                        | Micro-B                          |  |
| 6No. of contacts                     |                          | 10 contacts                      |  |
| Contact type                         | Р                        | Receptacle (male contacts)       |  |
|                                      | S                        | Plug connector (female contacts) |  |
| 8Plug components                     | UNIT                     | Plug unit                        |  |
|                                      | SLD*                     | Plug shield (Note 1)             |  |

Note 1 : \* contains type symbol such as A, B or number.


# Receptacle Micro-B

### Standard type



| Part No.         | HRS No.       | Packaging      |  |
|------------------|---------------|----------------|--|
| ZX360D-B-10P(30) | 242-0500-1 30 | 3,000 pcs/reel |  |

# Recommended PCB layout (component side)

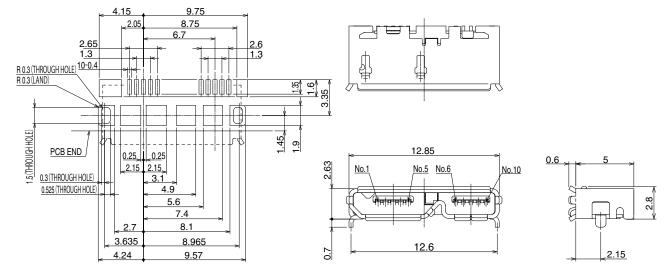

## Plug Micro-B


### •Cable side, PCB mount type





| Part No.             | HRS No.       | Packaging    |  |
|----------------------|---------------|--------------|--|
| ZX360-B-10S-UNIT(30) | 242-0501-4 30 | 100 pcs/pack |  |

Note : Cable assembly instructions are separately available.




### • Cable side, PCB mount type shield A




| • | •                 |               |                |                |
|---|-------------------|---------------|----------------|----------------|
|   | Part No.          | HRS No.       | Packaging      | Cable Diameter |
|   | ZX360-B-SLDA      | 242-0502-7 00 | 2,700 pcs/reel | <i>\$</i> 3.3  |
|   | ZX360-B-SLDA(4.8) | 242-0508-3 00 | 1,500 pcs/reel | <i>φ</i> 4.8   |
|   |                   |               |                |                |
|   | 13.05             |               | 13.05          | <b></b>        |



## Packaging Specifications (JIS C 0806-3 compliant)

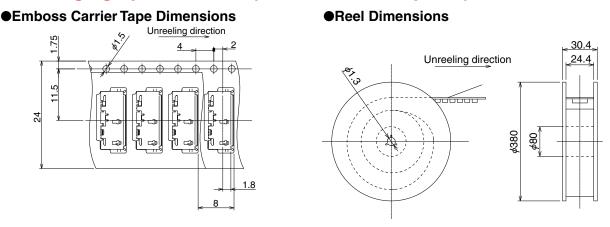

# Receptacle Recommended Temperature Profile



#### Set-up Condition

- ○Solder paste used
- Sn96.5/Ag3.0/Cu0.5
- $\bigcirc$ Board Dimensions : 35 × 35 × 0.8 mm
- Material : Glass-based epoxy resin
- Temperature measurement point Contact lead area
- Note 1 : Reflow is allowed up to 2 times with the same conditions.Please allow the parts to return to the ambient temperature before the second run is started.
- Note 2 : The measured temperature is the temperature of the PCB surface around the connector leads.

### Precautions

- 1. Please handle connectors with care because excessive external force may damage the connectors.
- 2. To extract the plug, hold the plug body itself and remove it straight away from the receptacle. Do not pull on the cable to extract the plug as this may damage the connector.
- 3. Due to the assembly process there may be some abrasions on the surface of the receptacle, they will not have a negative impact on the performance of the product.
- 4. Due to external variances, the plating shine on the surface of the receptacles may differ from lot to lot. This difference will not affect the performance of this product.

# HIROSE ELECTRIC CO.,LTD.

2-6-3,Nakagawa Chuoh,Tsuzuki-Ku,Yokohama-Shi 224-8540,JAPAN https://www.hirose.com/