
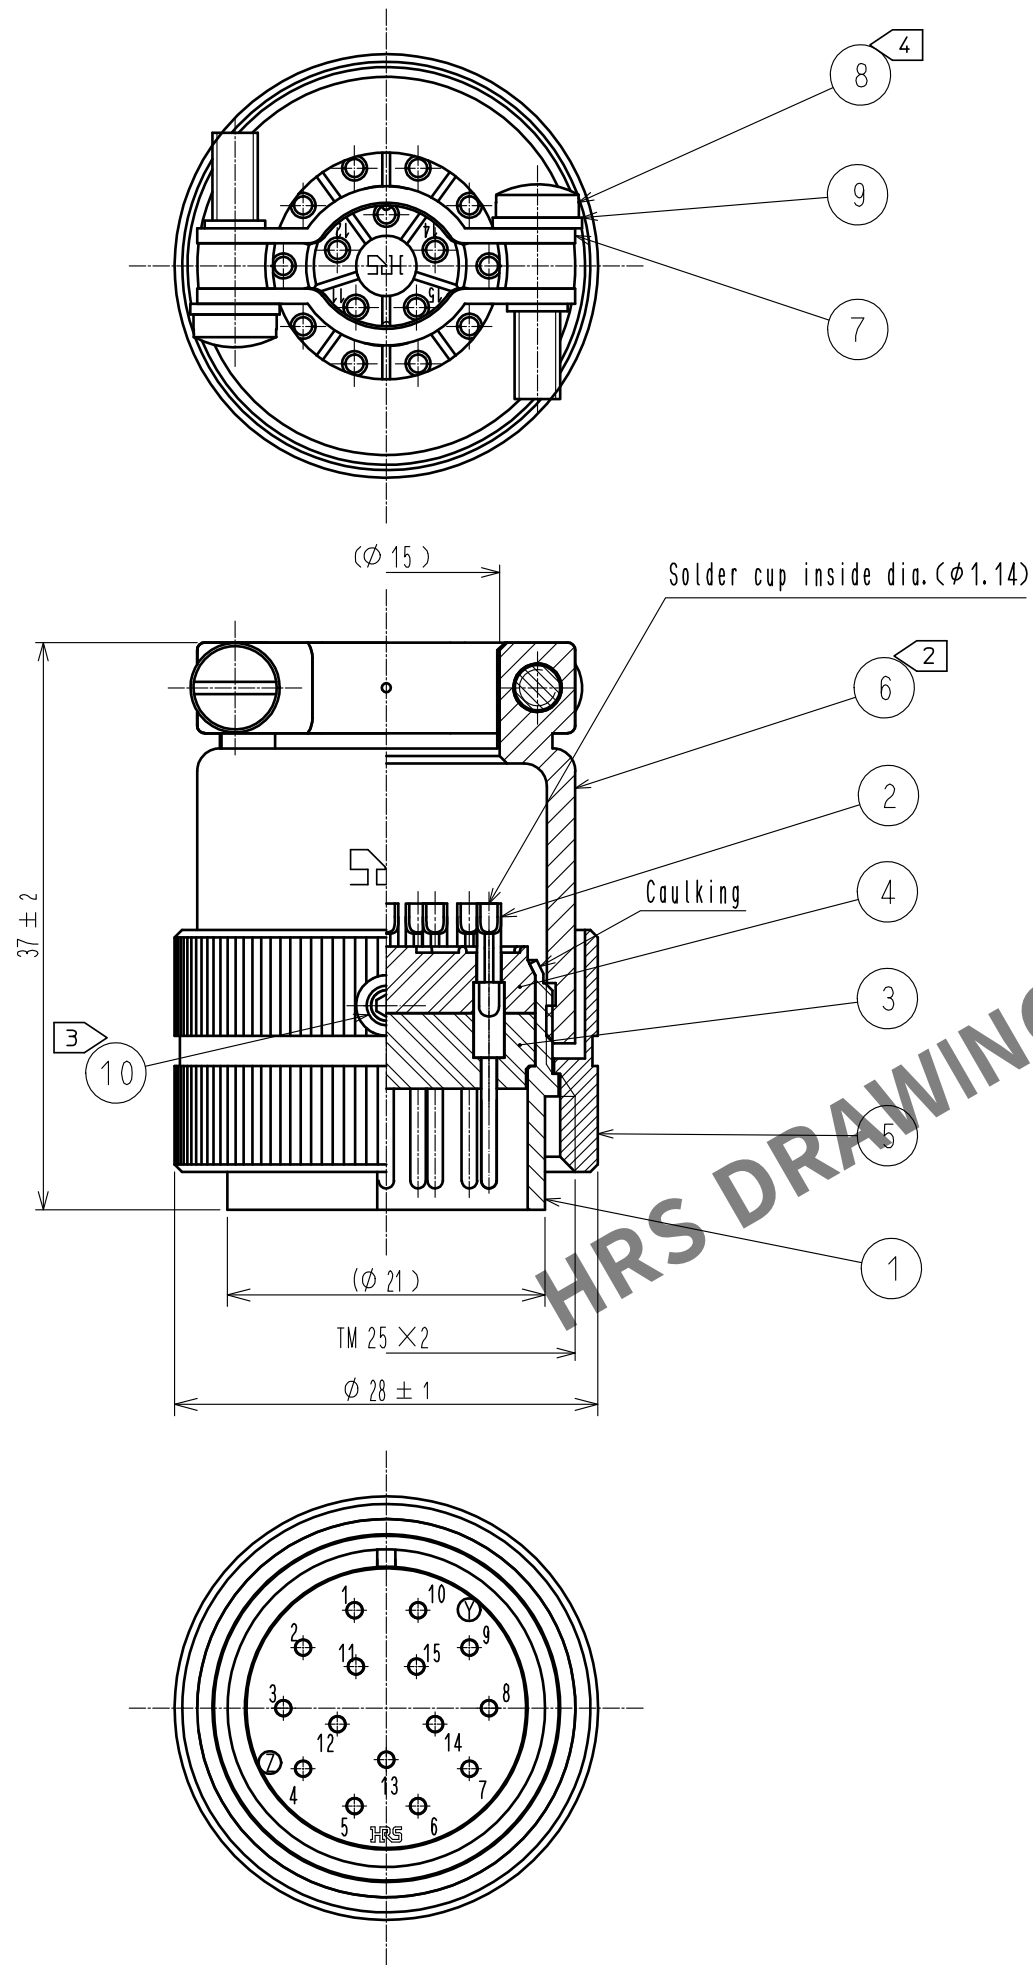




- Notes 1 Rotation example of Ref. No. ① and ⑥ are shown.
② The tightening torque of Ref. No. ⑥: 2 to 3 N·m.
③ The tightening torque of Ref. No. ⑩: 0.2 to 0.3 N·m.
Across flats hexagon head of Ref. No. ⑩: 1.27
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion of Ref. No. ⑩
in order to prevent loosening.
④ The tightening torque of Ref. No. ⑧: 0.6 to 0.7 N·m.
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion of Ref. No. ⑧
in order to prevent loosening.
5 The cable pull and twisting strength and other characteristics may differ,
depending on the cable structure, please confirm before the use.

5	Brass	Nickel plating	10	Steel	Nickel plating	Hexagon socket set screws M2.6×0.45×2 Spring lock washers No. 2 3mm Slotted head screw M3×0.5×12
4	Polyphenylene sulfide	(Black)	9	Phosphor bronze	Nickel plating	
3	Polyphenylene sulfide	(Black)	8	Brass	Nickel plating	
2	Brass	Silver plating 4μm min.	7	Brass	Nickel plating	
1	Brass	Nickel plating	6	Brass	Nickel plating	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS	

UNITS mm   HIROSE ELECTRIC CO., LTD.	SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
	APPROVED : TP. KOMATSU 20230616			DRAWING NO. EDC-003736-81-00		
	CHECKED : HY. KOBAYASHI 20230616			PART NO. RM21TP-15P(81)		
	DESIGNED : HT. ZENBA 20230616			CODE NO. CL0109-0323-5-81		
	DRAWN : KR. SUZUKI 20230614			 1/1		