

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.



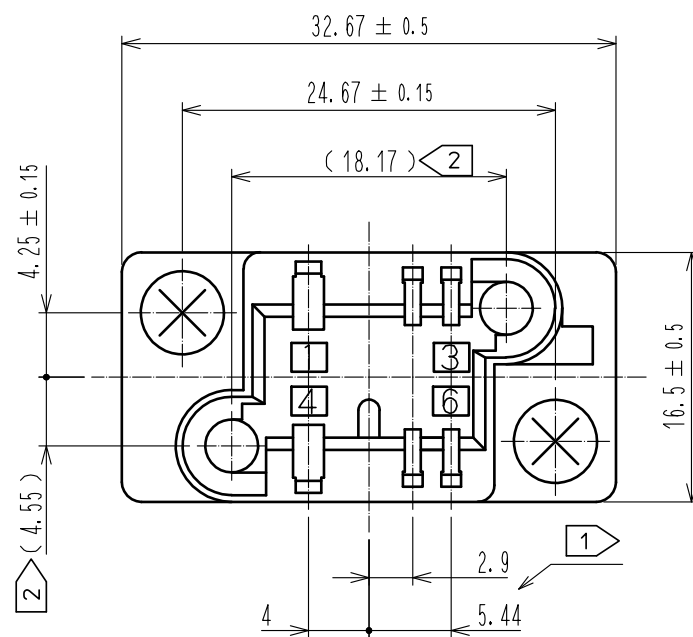


Table-1

	Contact name	AWG No.	UL	CSA	TÜV	Contact No.
Operating temperature range	—	—	-10 ~ +60°C			—
Rated voltage	—	—	AC250V		AC250V	1, 4
					AC125V	2, 3, 5, 6
	QR/P1-SC1B-※21	#14	10A	10A	10A	1, 4
		#16		8A		
Rated current	QR/P1-SC1A-※11	#18	5A	5A	5A	1, 4
		#20	3A	3A	2.5A	
	QR/P1-SC2A-※11	#22~24			1A	2, 3, 5, 6
		#24	1A	2A	1A	
		#26		1A		
		#28				


※: 1 is a loose piece contact
※: 2 is a strip contact

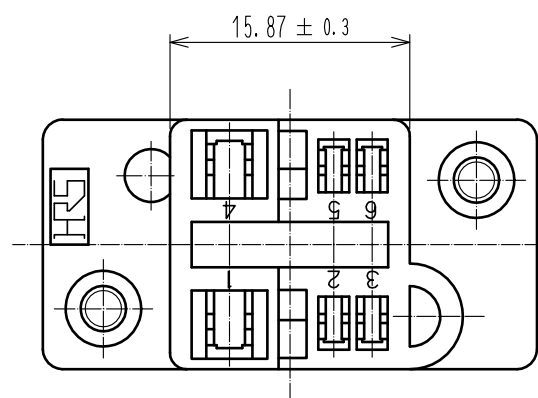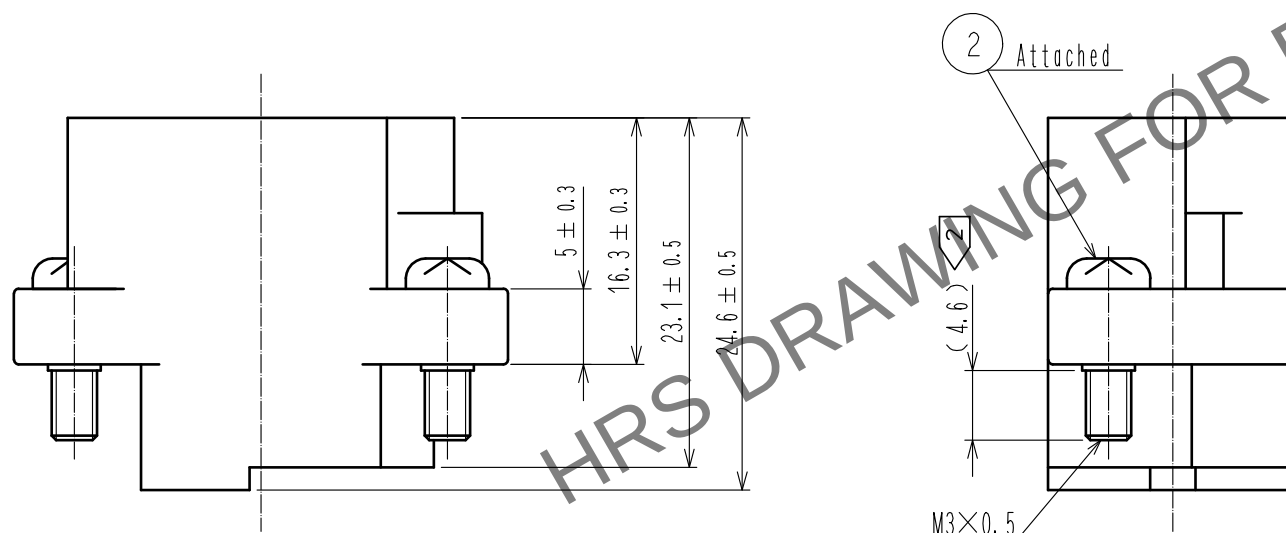


- Notes
- The dimensional tolerance of each contact hole position to be ± 0.1 .
 - The dimensions in parentheses are for reference.
 - Operating temperature range, rated voltage and rated current are per Table-1.
 - The connector can be moved 0.4mm or more in all directions.
 - Directions for use.
(1) Please do not use for the purpose of interrupting the current.
(2) Please use this connector in enclosure.
 - Over : Nickel plating 0.8 μ m min.
Under : Copper plating 2 μ m min.

< Reference panel cutout >

Rear Mounting
(Connector mounted on the back of the panel)

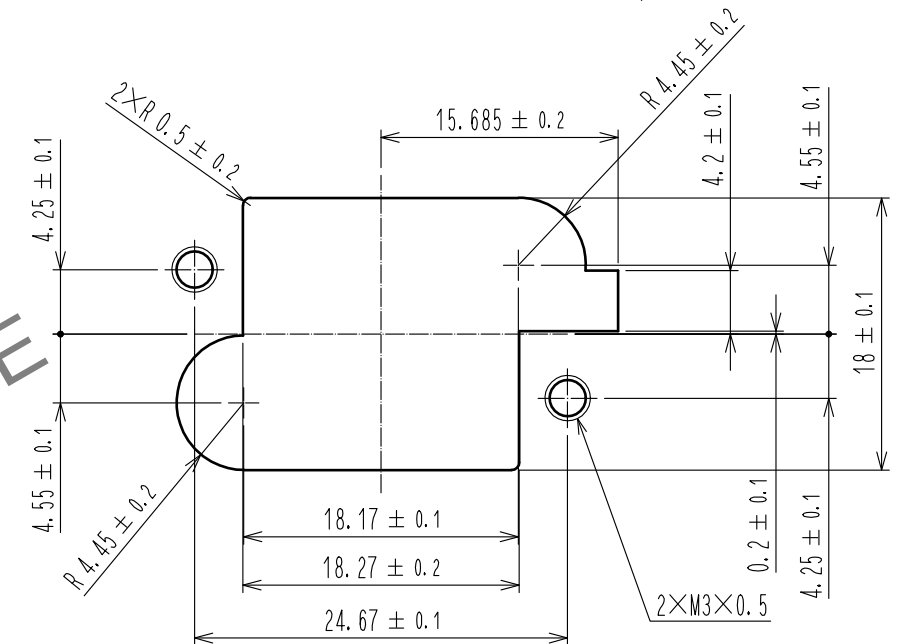

Front Mounting
(Connector mounted on the face of the panel)

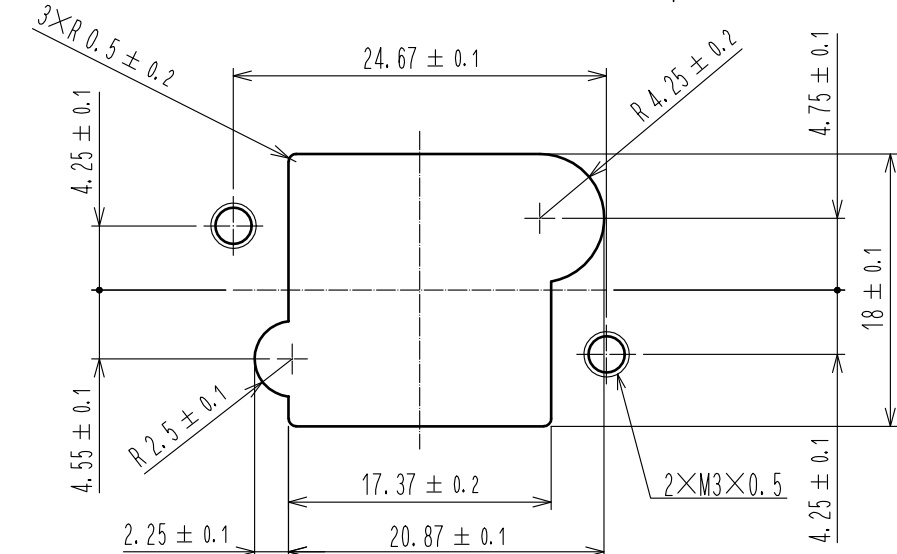

1	PBT	Black , UL94V-0	2	Steel	Shoulder screw M3×0.5
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED
		APPROVED : TU. TANIGUCHI	20181205	DRAWING NO.	EDC-026115-21-00
		CHECKED : TU. TANIGUCHI	20181205	PART NO.	QR/P6-6S-C(21)
		DESIGNED : TS. ITO	20181205	CODE NO.	CL221-0161-7-21
		DRAWN : SJ. SATO	20181204		