

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.




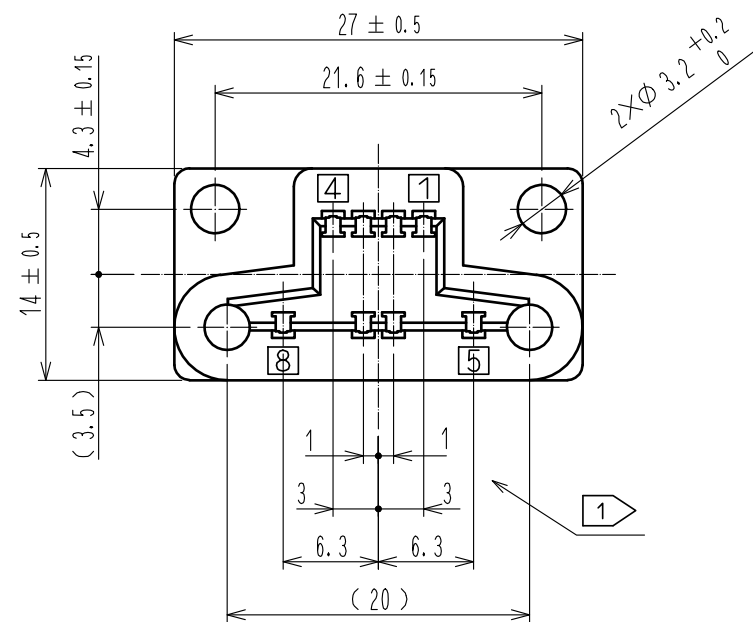



Table-1

	Contact name	AWG No.	UL, CSA	TÜV	Contact No.
Operating temperature range	—	—	$-10 \sim +60^{\circ}\text{C}$		—
Rated voltage	—	—	AC300V	AC380V	5, 8
			AC30V	AC30V	1~8
Rated current	QR/P8-PC-※11	AWG#20	3A	2.5A	5, 8
		AWG#22	3A	1A	
		AWG#24	2A	1A	
	QR/P8-PC-※21	AWG#24	2A	1A	1~8
		AWG#26	1A	1A	
		AWG#28	1A	—	


※: 1 is a loose piece contact
※: 2 is a strip contact

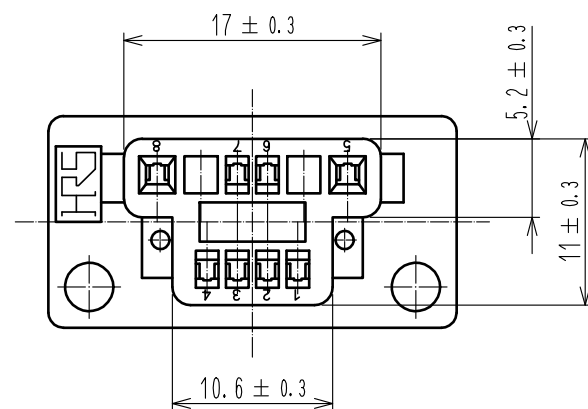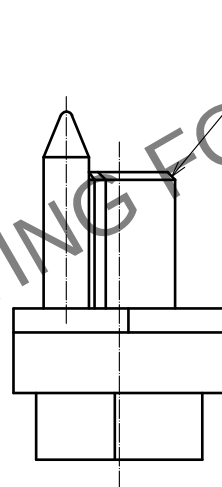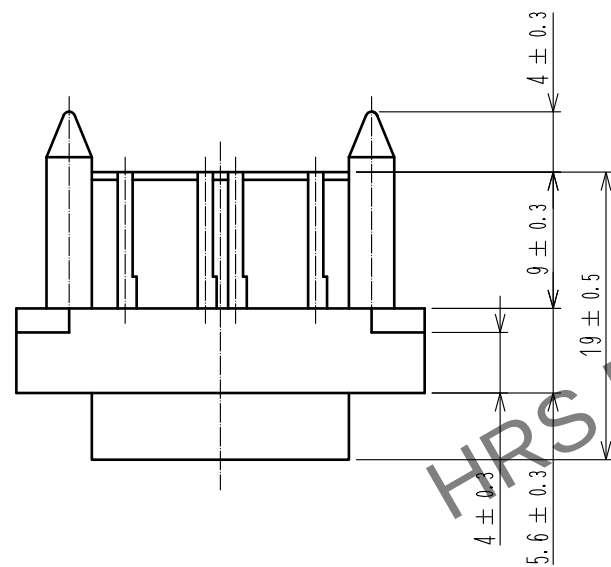

Panel cutout, front mount

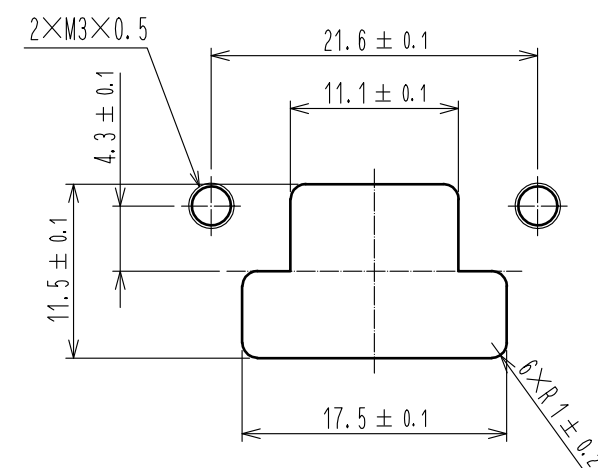

Panel cutout, rear mount

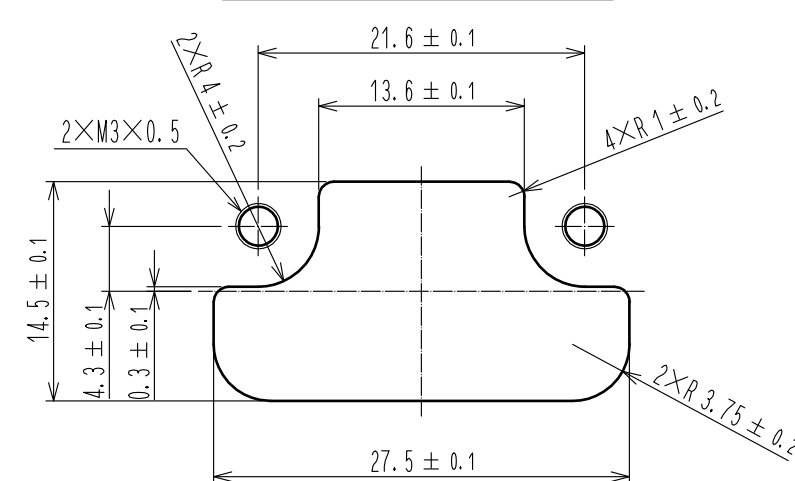

- Notes
- The dimensional tolerance of each contact hole position to be ± 0.1 .
 - The dimensions in parentheses are for reference.
 - Operating temperature range, rated voltage and rated current are per Table-1.
 - Directions for use.
 - Please do not use for the purpose of interrupting the current.
 - Please use inside the enclosure or equipment.

1	PC	Black, UL94V-0					
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED
HIROSE ELECTRIC CO., LTD.		APPROVED : TU. TANIGUCHI	20181204	DRAWING NO.		EDC-027641-21-00	
		CHECKED : TU. TANIGUCHI	20181204	PART NO.		QR/P8-8P-C(21)	
		DESIGNED : TS. ITO	20181130	CODE NO.		CL221-0167-3-21	
		DRAWN : SJ. SATO	20181130				