


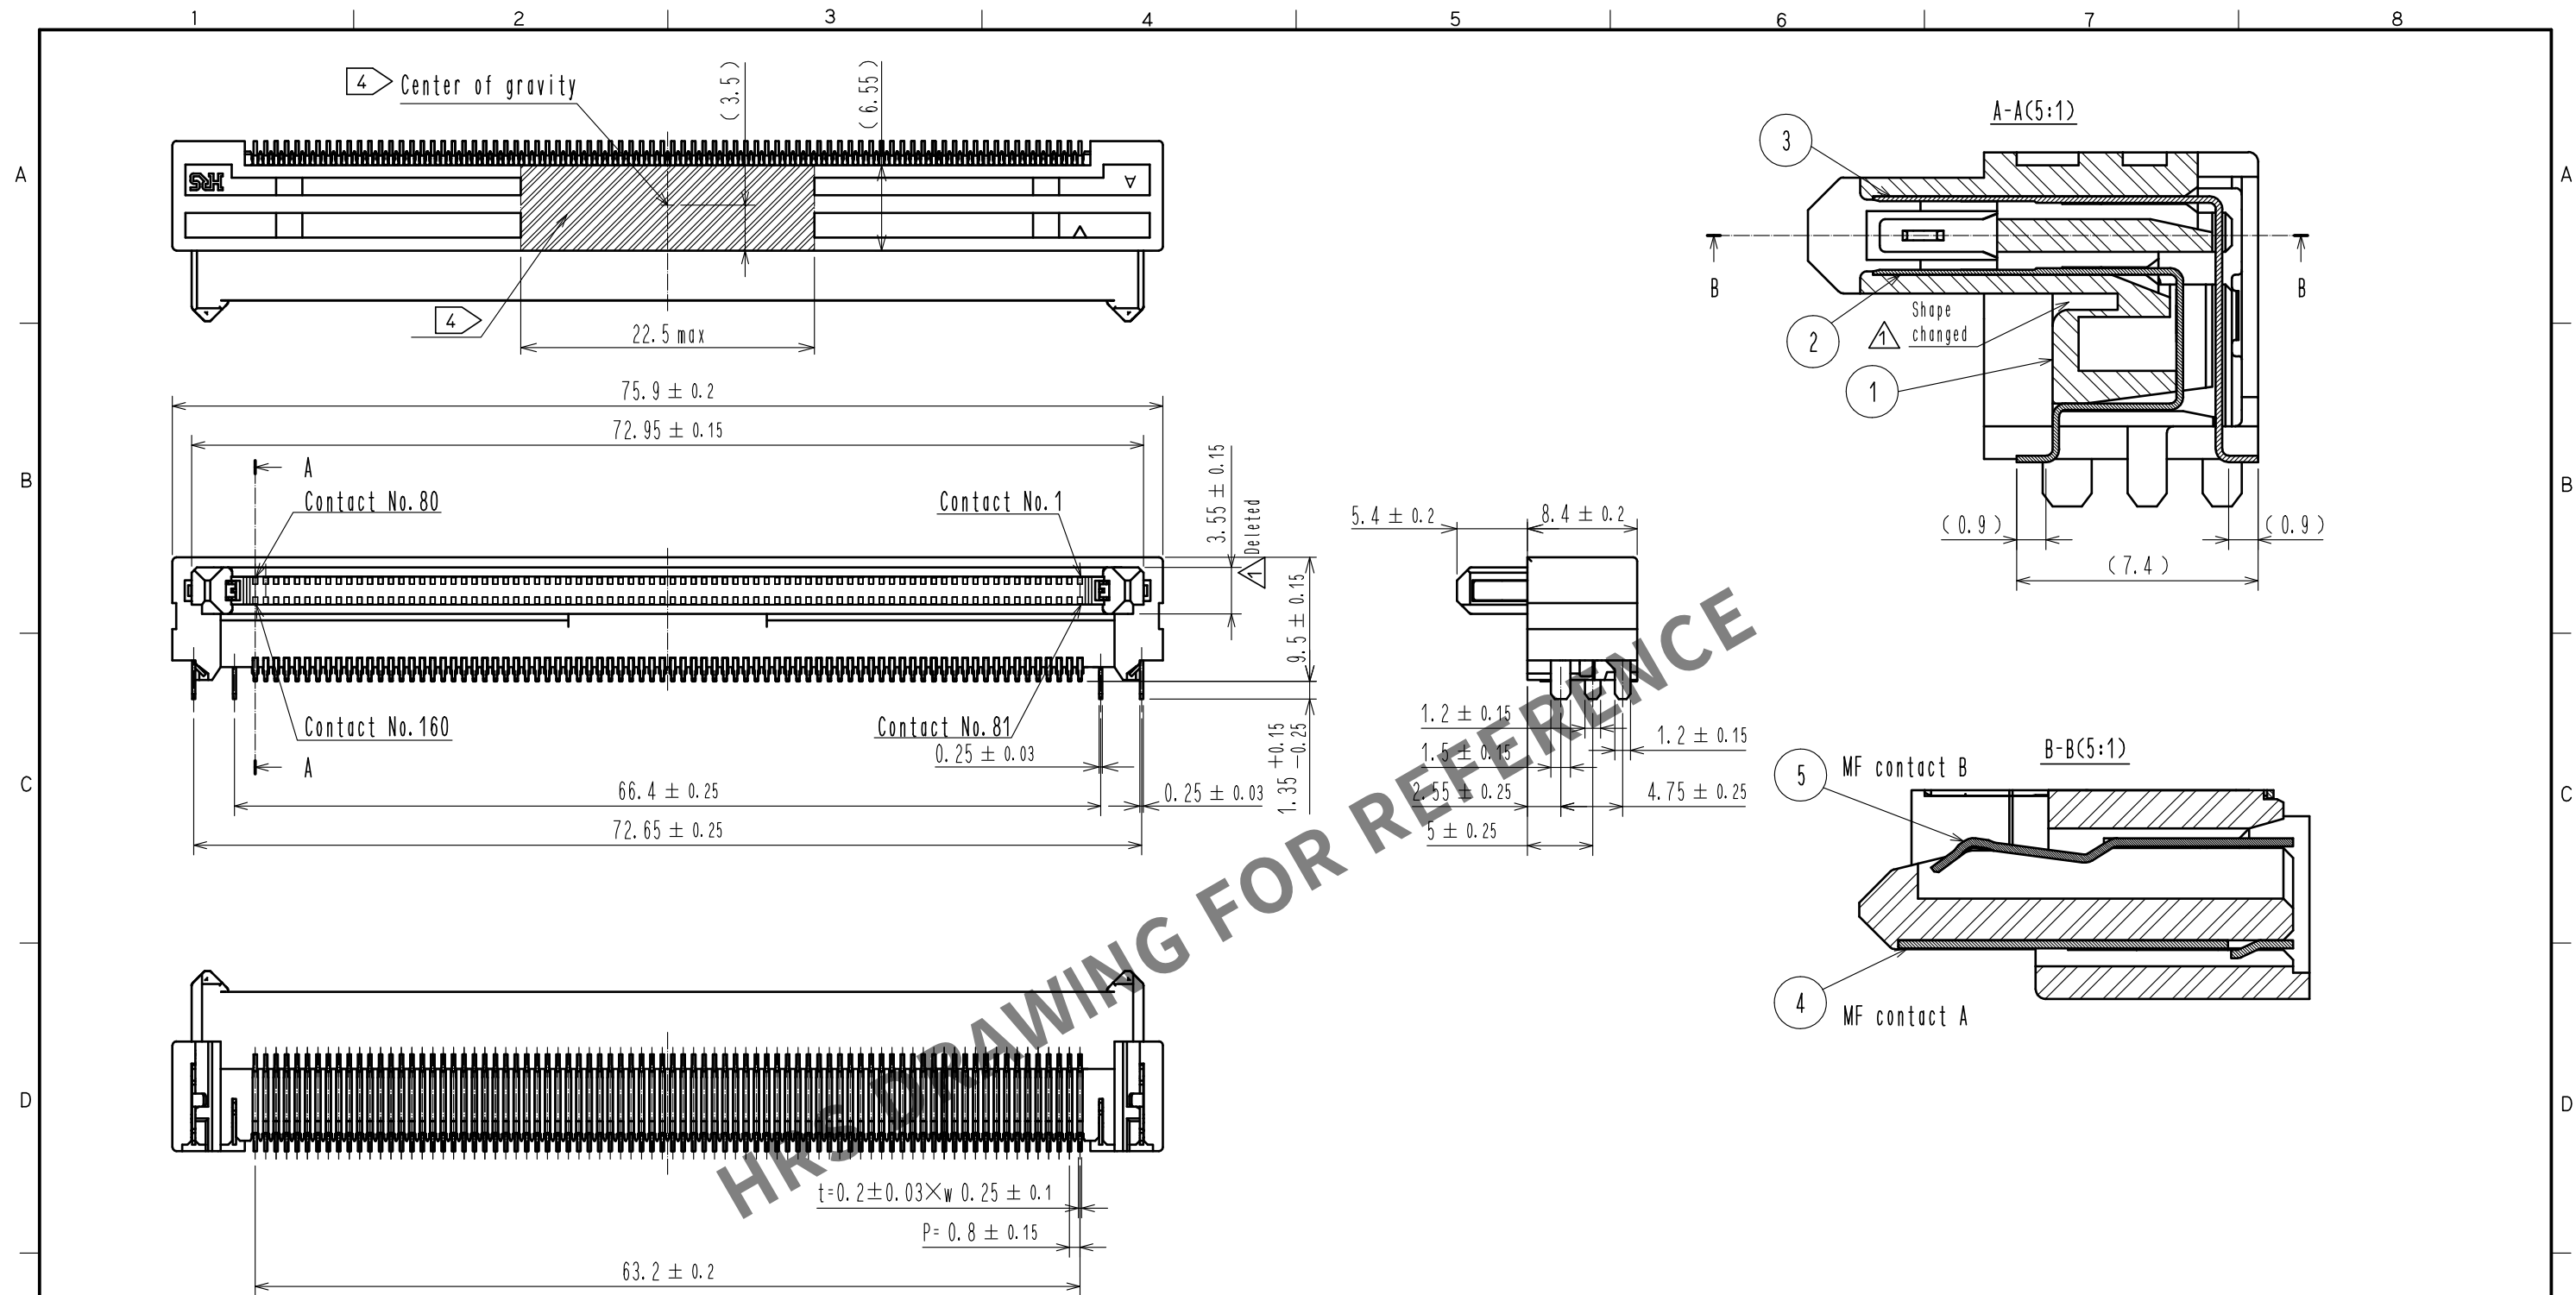

NOTE 1 Lead co-planarity is 0.1mm MAX.

2 Contacts are 3 steps sequential. (MF contact A=>Signal contact=>MF contact B)
When using this sequential structure, please avoid angled insertion.

3 MF contact A and MF contact B can be used as power supply contact. (3A/pin MAX)

4 It shows connector's center of gravity and vacuum pickup area.

5 This is packaged in tray.(30pcs/tray)

6 Blemish and hit mark can be occurred through out the manufacturing process which doesn't affect quality level.

7 The dimensions in parentheses are for references.

3	Copper Alloy	Contact area:Gold 0.1#m	6	Polystyrene	
		Lead area:Gold 0.03#m			Contact area:Gold 0.1#m
		Under plating:Nickel 1.3#m			Lead area:Tin-plating 1#m
2	Copper Alloy	Contact area:Gold 0.1#m	5	Copper Alloy	Under plating:Nickel 1.3#m
		Lead area:Gold 0.03#m			Contact area:Gold 0.1#m
		Under plating:Nickel 1.3#m			Lead area:Tin-plating 1#m
1	Polyamide	Black UL94V-0	4	Copper Alloy	Under plating:Nickel 1.3#m
NO.	MATERIAL	FINISH . REMARKS			NO.

UNITS mm		SCALE 2 : 1		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
				2				

	HIROSE ELECTRIC CO., LTD.	APPROVED :HS. OKAWA	14. 08. 20	DRAWING NO.	EDC3-352034-00
		CHECKED :KN. SHIBUYA	14. 08. 19		
		DESIGNED :DK. AIMOTO	14. 08. 18	CODE NO.	CL579-0066-8-00
		DRAWN :DK. AIMOTO	14. 08. 18		

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

