


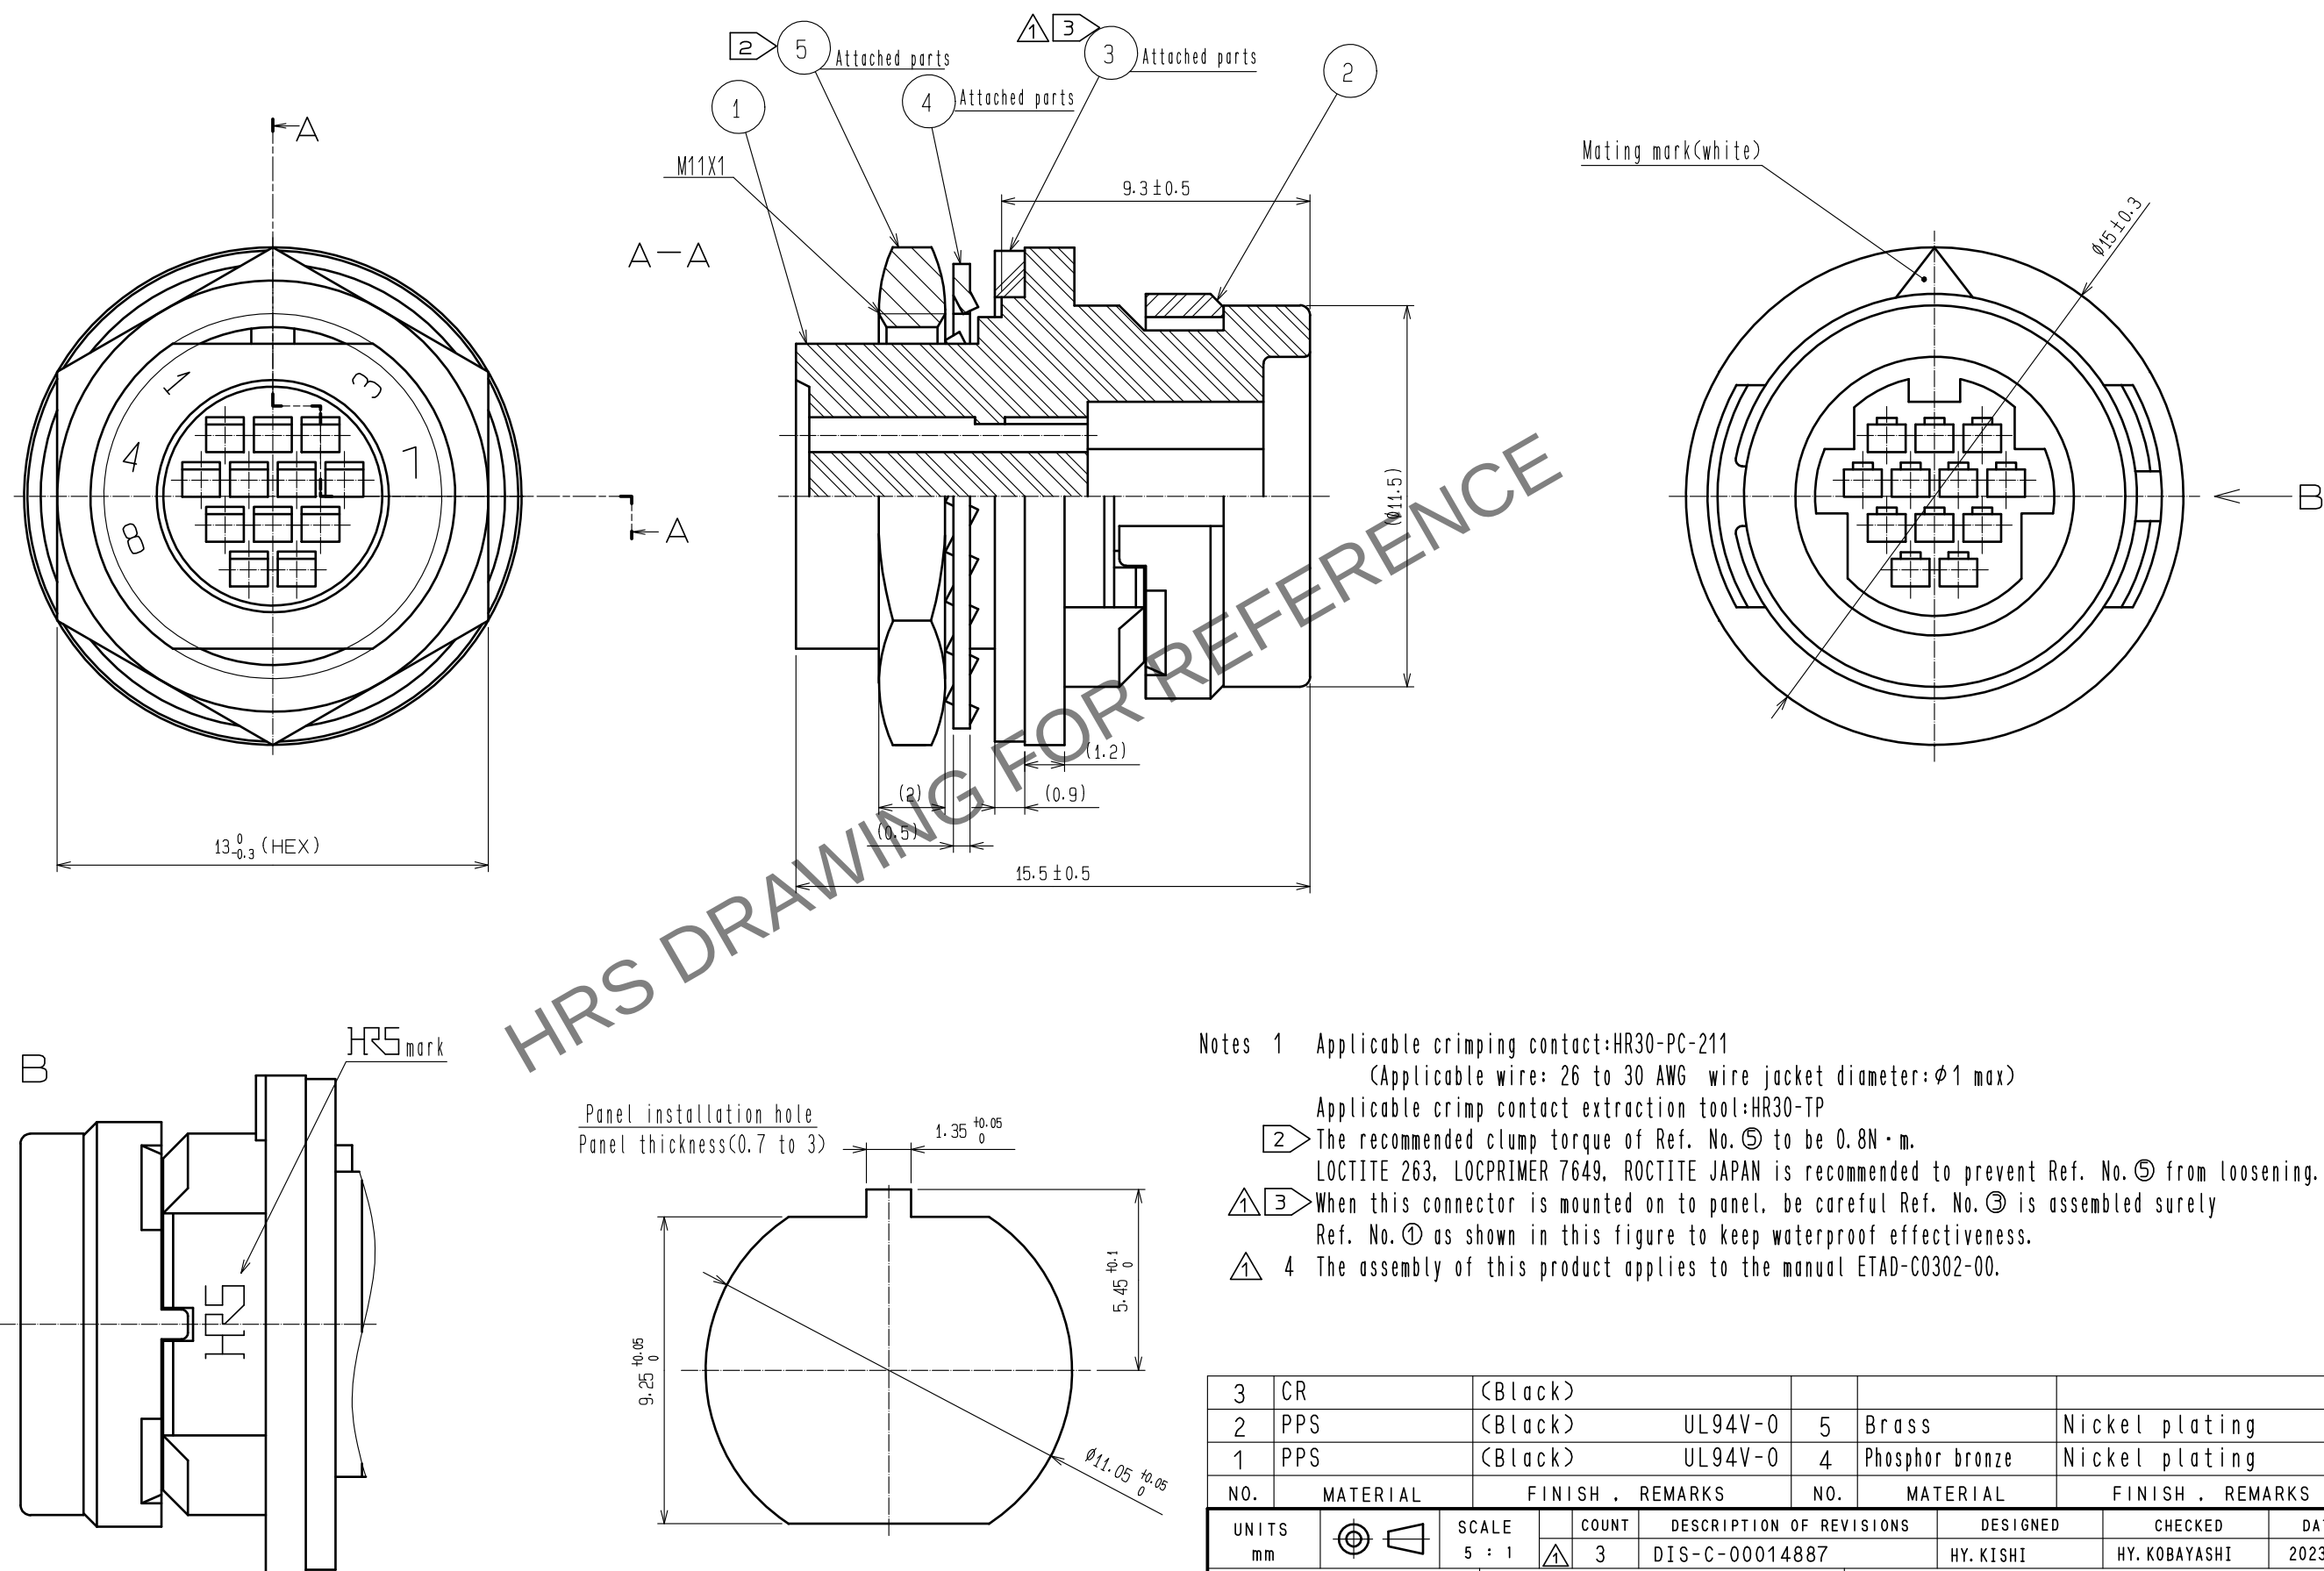

- Notes 1 Applicable crimping contact:HR30-PC-211
(Applicable wire: 26 to 30 AWG wire jacket diameter: $\phi 1$ max)
Applicable crimp contact extraction tool:HR30-TP
- 2 The recommended clamp torque of Ref. No. 5 to be $0.8\text{N} \cdot \text{m}$.
LOCTITE 263, LOCPRIMER 7649, ROCTITE JAPAN is recommended to prevent Ref. No. 5 from loosening.
- 3 When this connector is mounted on to panel, be careful Ref. No. 3 is assembled surely
Ref. No. 1 as shown in this figure to keep waterproof effectiveness.
- 4 The assembly of this product applies to the manual ETAD-C0302-00.

3	CR	(Black)				
2	PPS	(Black)	UL94V-0	5	Brass	Nickel plating
1	PPS	(Black)	UL94V-0	4	Phosphor bronze	Nickel plating
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH
UNITS	mm	SCALE	5 : 1	COUNT	3	DESCRIPTION OF REVISIONS
						DIS-C-00014887
						DESIGNED
						HY. KISHI
						CHECKED
						HY. KOBAYASHI
						DATE
						20230328
						APPROVED
						HY. KOBAYASHI
						20180312
						CHECKED
						HY. KOBAYASHI
						20180312
						DESIGNED
						DS. MATSUNE
						20180312
						DRAWN
						DS. MATSUNE
						20180312
						DRAWING NO.
						EDC-112155-31-00
						PART NO.
						HR30-7R-12PC(31)
						CODE NO.
						CL0130-1013-8-31
						1/1