
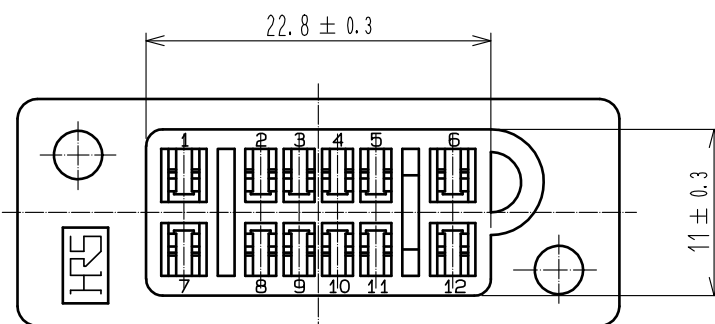
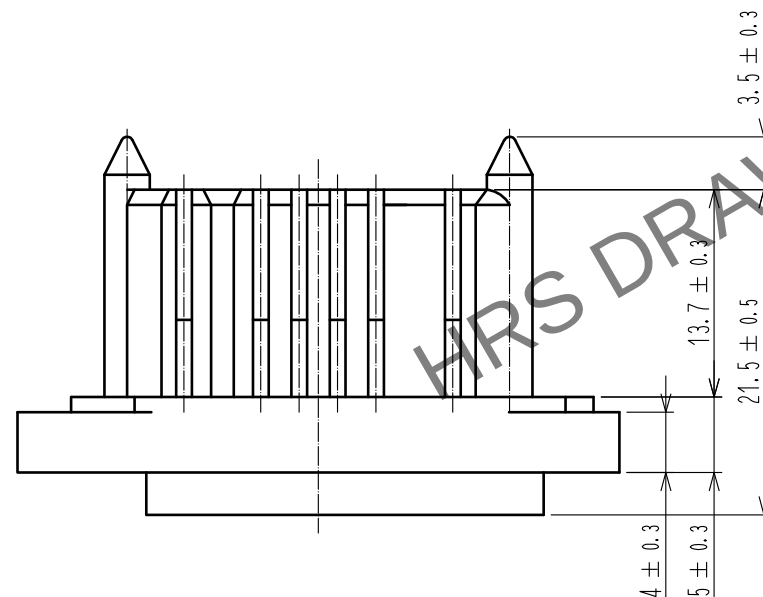


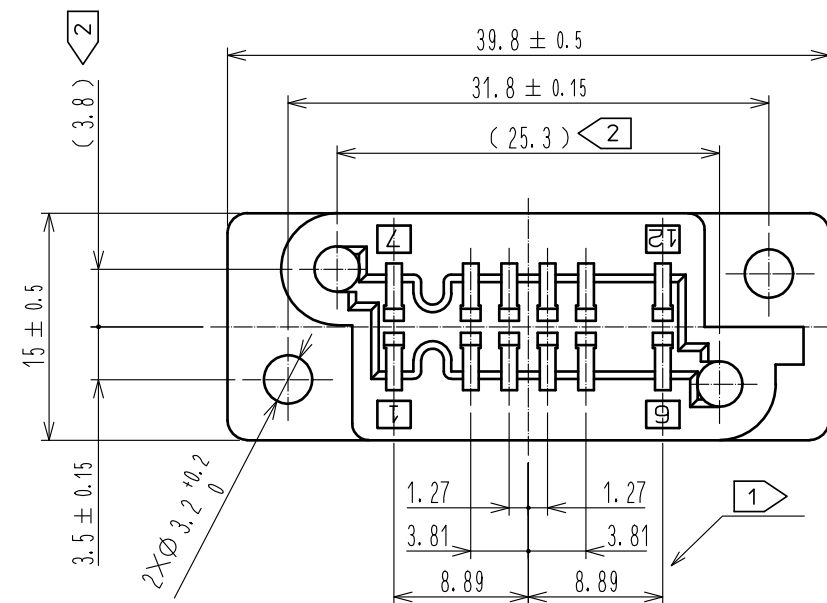


4 Table-1

Contact name	Applicable wire
QR/P1-PC2A-※11	AWG # 24 ~ 28
QR/P1-PC2B-※21	AWG # 20 ~ 24


※: 1 is a loose piece contact
※: 2 is a strip contact

3 Table-2


Safety standards		UL, CSA	TÜV
Operating temperature range		-10 ~ +60°C	
Rated voltage	Contact No. 1, 6, 7, 12	AC300V	AC380V DC450V
	Other contact	AC250V	AC125V DC150V
Rated current	AWG#20	3A	2.5A
	AWG#22		
	AWG#24		
	AWG#26	1A	1A
	AWG#28		

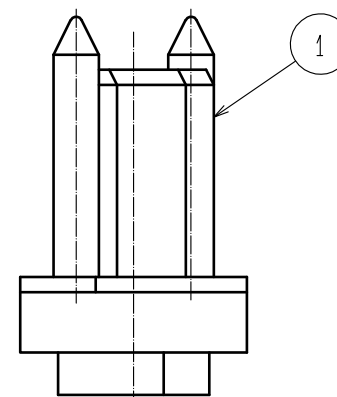

< Reference panel cutout >
Rear Mounting
(Connector mounted on the back of the panel)

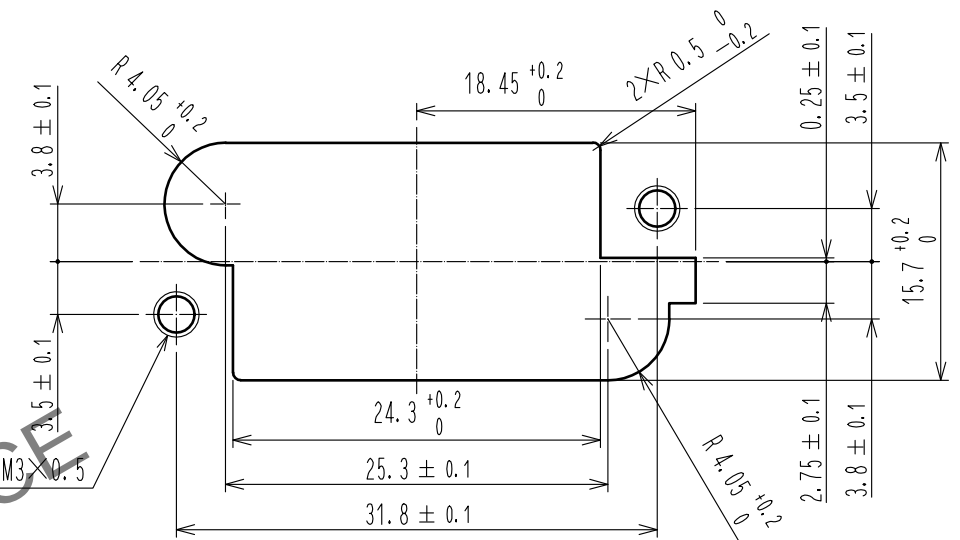

Front Mounting
(Connector mounted on the face of the panel)

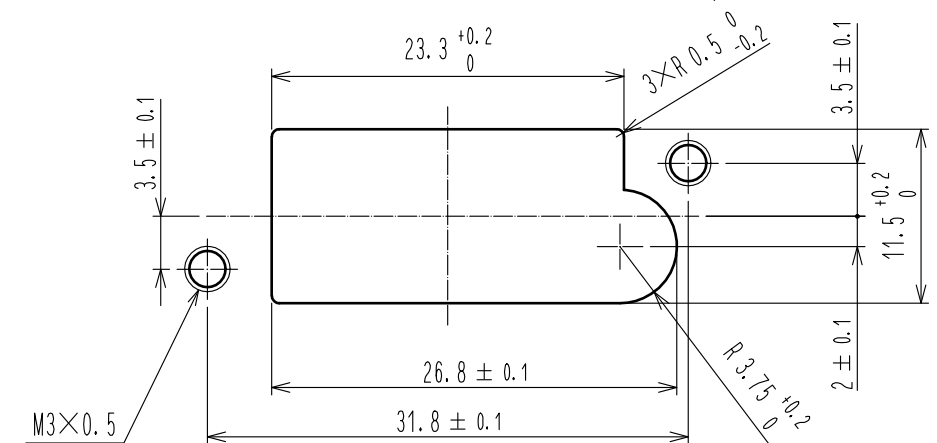

- Notes
- 1 The dimensional tolerance of each contact hole position to be ± 0.1 .
 - 2 The dimensions in parentheses are for reference.
 - 3 Operating temperature range, rated voltage and rated current are per Table-2.
 - 4 Please use contacts in Table-1 for QR/P4.
 5. Directions for use.
(1) Please do not use for the purpose of interrupting the current.
(2) Please use inside the enclosure or equipment.

1	PBT	Black . UL94V-0			
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED CHECKED DATE
HIROSE ELECTRIC CO., LTD.		APPROVED : TU. TANIGUCHI	20181212	DRAWING NO.	EDC-023382-21-00
		CHECKED : TU. TANIGUCHI	20181212	PART NO.	QR/P4-12P-C(21)
		DESIGNED : TS. ITO	20181205	CODE NO.	CL221-0139-8-21
		DRAWN : SJ. SATO	20181205		