


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

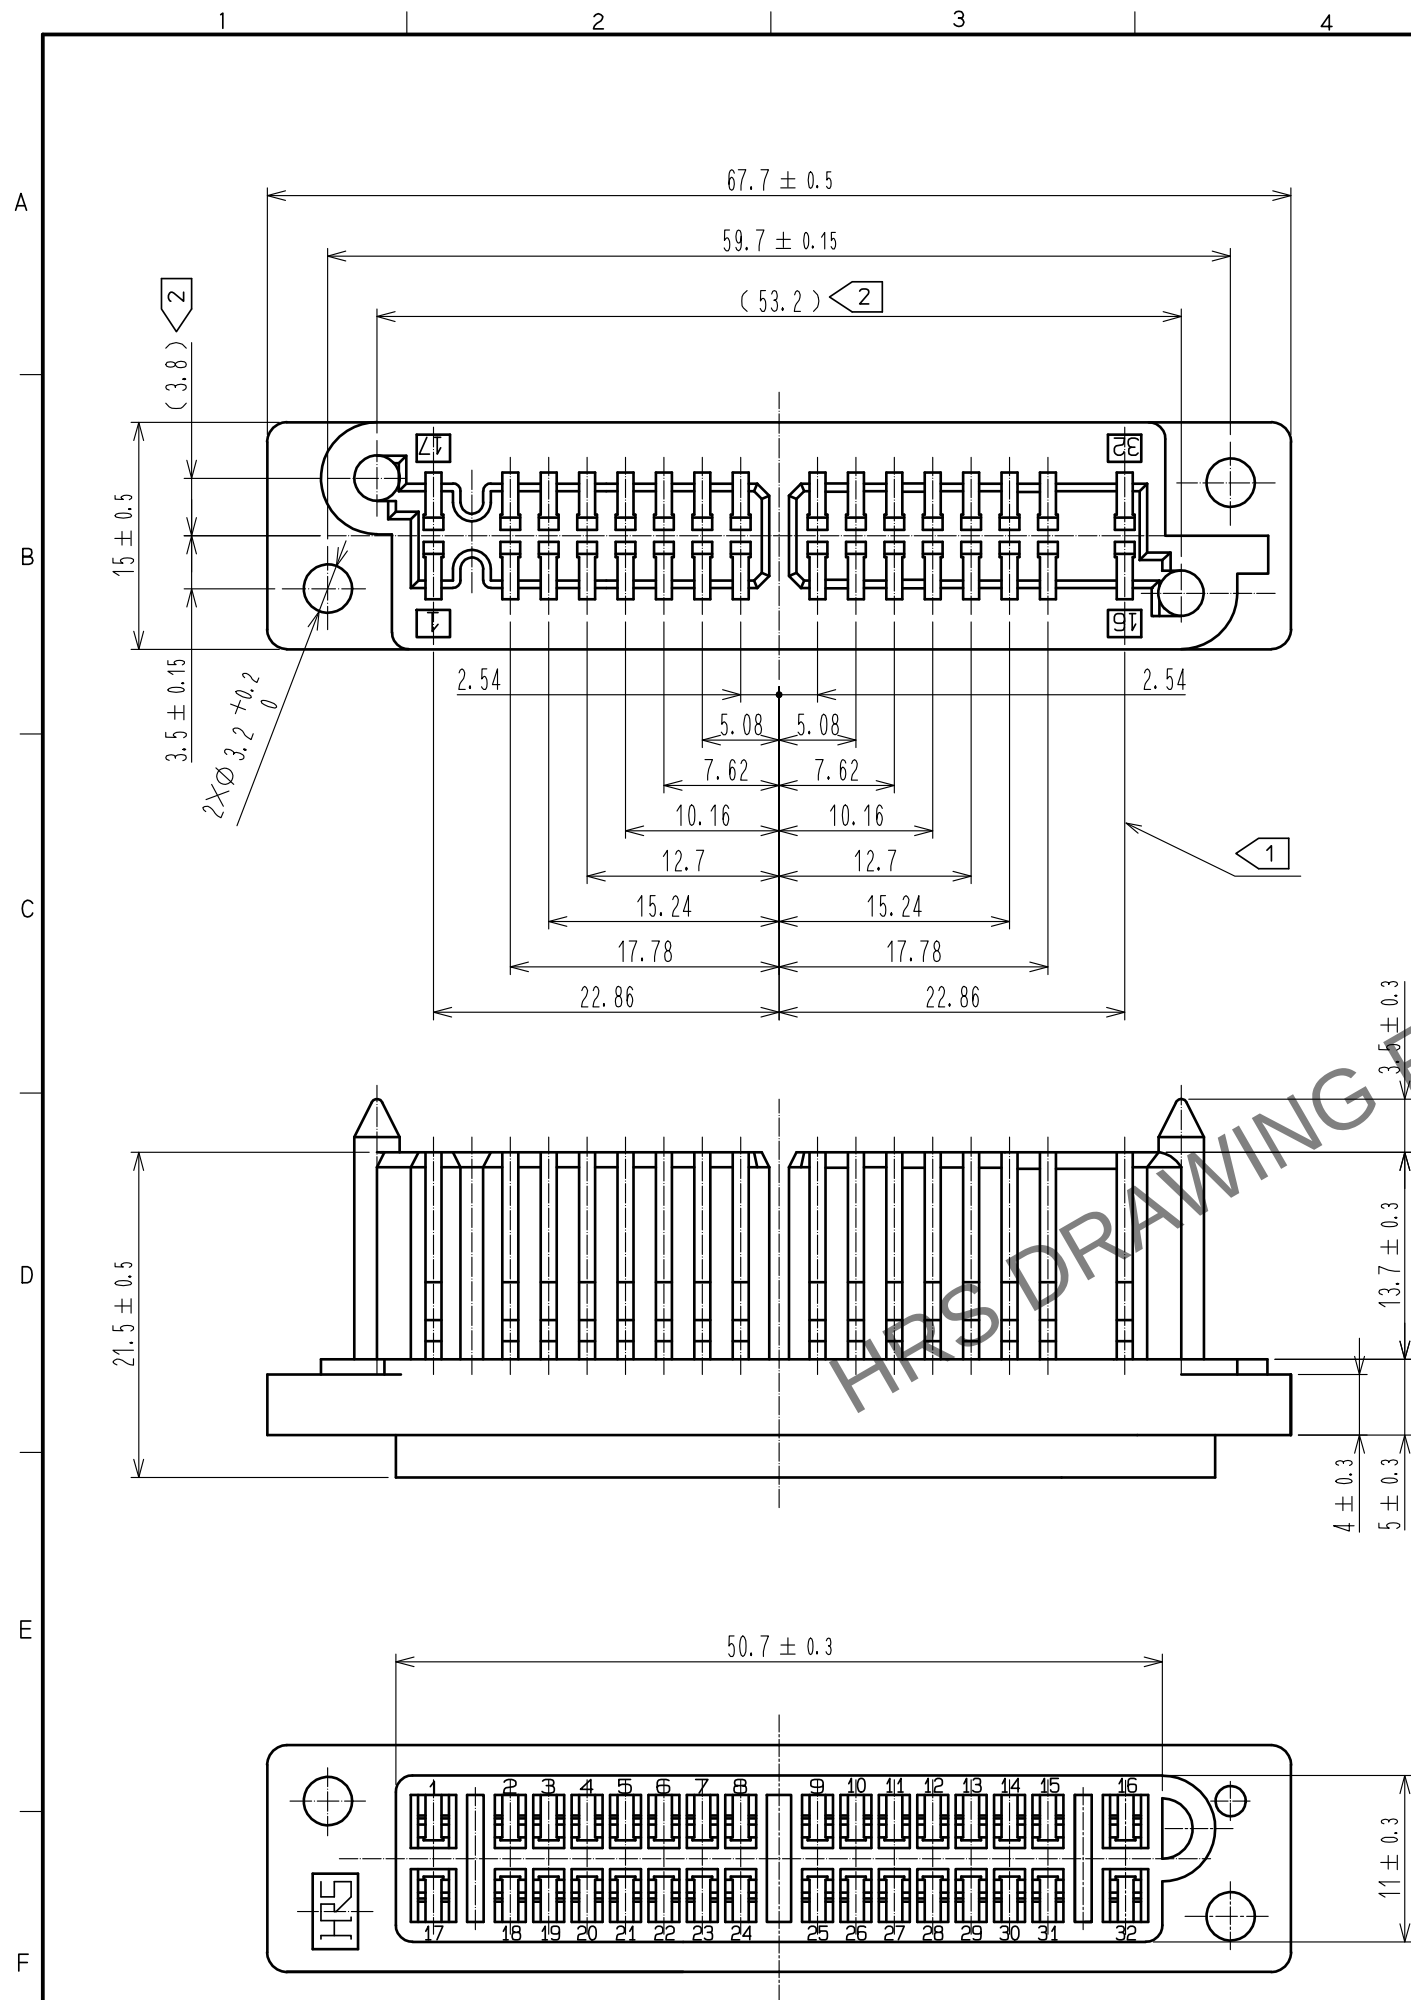

4 Table-1

Contact name	Applicable wire
QR/P1-PC2A-※11	AWG #24~28
QR/P1-PC2B-※21	AWG #20~24

※: 1 is a loose piece contact

※: 2 is a strip contact


3 Table-2

Safety standards		UL, CSA	TÜV
Operating temperature range		$-10 \sim +60^{\circ}\text{C}$	
Rated voltage	Contact No. 1, 16, 17, 32	AC300V	AC380V DC450V
	Other contact	AC250V	AC125V DC150V
Rated current	AWG #20	3A	2.5A
	AWG #22		
	AWG #24	2A	1A
	AWG #26	1A	—
	AWG #28	—	—

< Reference panel cutout >


Rear mounting (1:1)

(Connector mounted on the back of the panel)

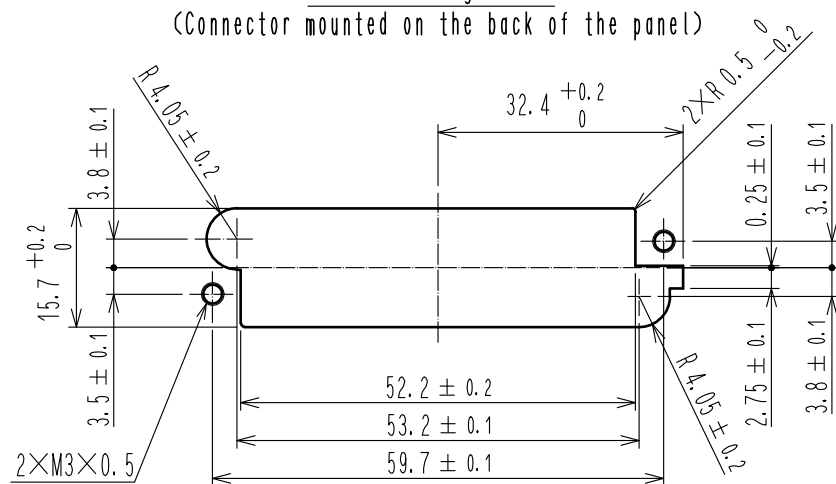

Front mounting (1:1)

(Connector mounted on the face of the panel)

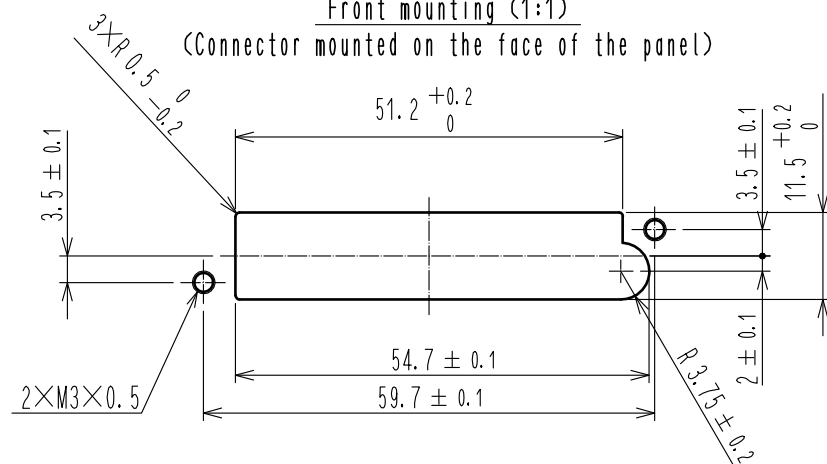

- Notes
- 1 The dimensional tolerance of each contact hole position to be ± 0.1 .
 - 2 The dimensions in parentheses are for reference.
 - 3 Operating temperature range, rated voltage and rated current are per Table-2.
 - 4 Please use contacts in Table-1 for QR/P4.
 5. Direction fro use
(1) Please do not use for the purpose of interrupting the current.
(2) Please use inside the enclosure or equipment.

1	PBT	Black . UL94V-0						
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS	DESIGNED	CHECKED	DATE
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS				
		APPROVED : TU. TANIGUCHI	20181212	DRAWING NO.	EDC-025299-21-00			
		CHECKED : TU. TANIGUCHI	20181212	PART NO.	QR/P4-32P-C(21)			
		DESIGNED : TS. ITO	20181205	CODE NO.	CL221-0153-9-21			
		DRAWN : SJ. SATO	20181205					