

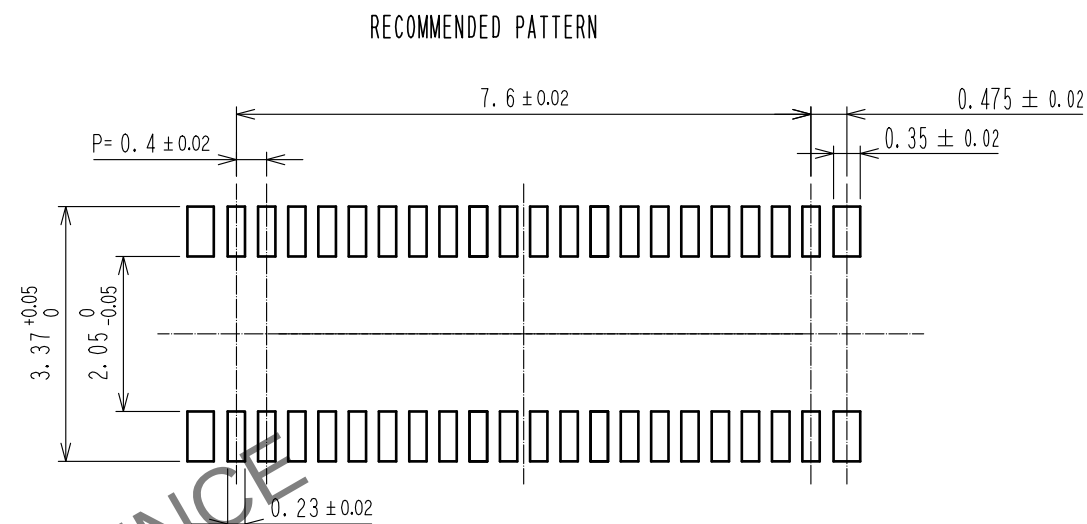
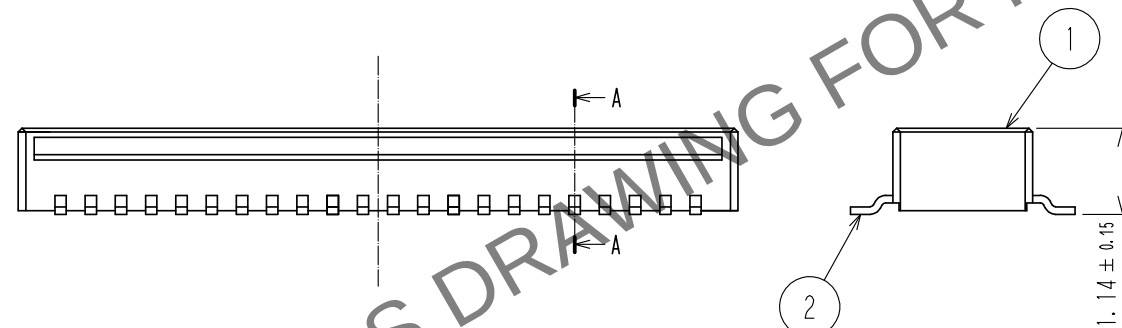


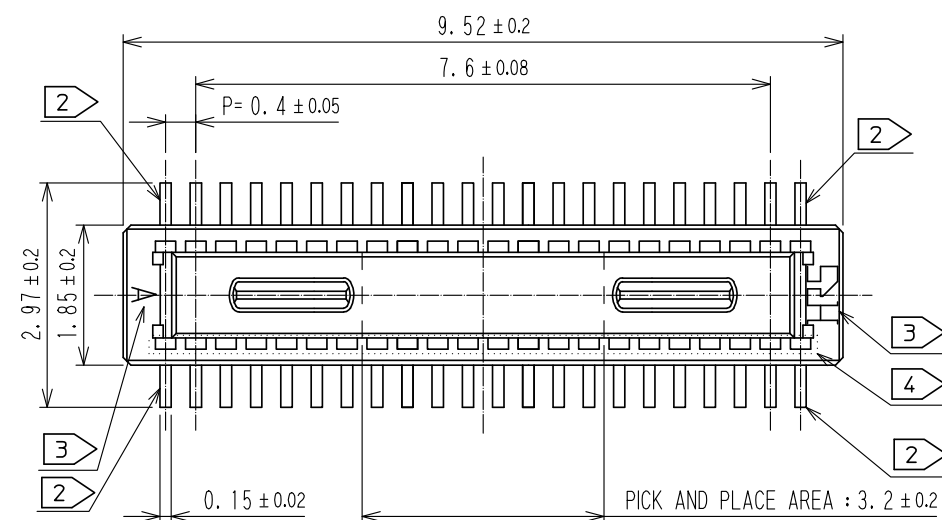

RECOMMENDED METAL MASK THICKNESS : 120 μm
RECOMMENDED METAL MASK OPENING RATIO : 80% FOR LEAD PAD

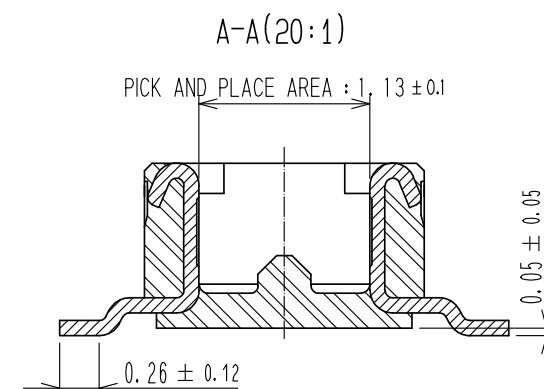

- NOTES 1. ALL LEADS CO-PLANARITY SHALL BE 0.1mm MAX.
2. EACH ONE CONTACT AT 4 CORNERS SHALL BE METAL HOLD DOWN.
3. HRS MARK AND CAV NO. ARE LOCATED IN APPROXIMAL AREA.
4. THERE IS A POSSIBILITY THAT THE RESIN WILL BE EXPOSED AT THIS AREA.
BUT THIS WILL NOT AFFECT THE CONTACT RELIABILITY.

2	COPPER ALLOY	CONTACT AREA:GOLD 0.05 μ m MIN	6	PS	CLEAR, REINFORCEMENT COLLAR				
		SMT LEAD:GOLD 0.05 μ m MIN	5	PS	BLACK, PLASTIC REEL				
		UNDERPLATING:NICKEL 1 μ m MIN	4	POLYESTER	CLEAR, COVER TAPE				
1	LCP	BLACK, UL94V-0	3	PS	CLEAR, EMBOSSED CARRIER TAPE				
NO.	MATERIAL	FINISH . REMARKS		NO.	MATERIAL	FINISH . REMARKS			
UNITS mm		SCALE 10 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.	APPROVED :WR. FUKUCHI		20210303		DRAWING NO.		EDC-386695-58-00		
	CHECED :TS. MIYAZAKI		20210303		PART NO.		DF40TC-40DP-0. 4V(58)		
	DESIGNED :YK. SATAKE		20210303		CODE NO.		CL0684-4264-0-58		
	DRAWN :YK. SATAKE		20210303		 				

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

