

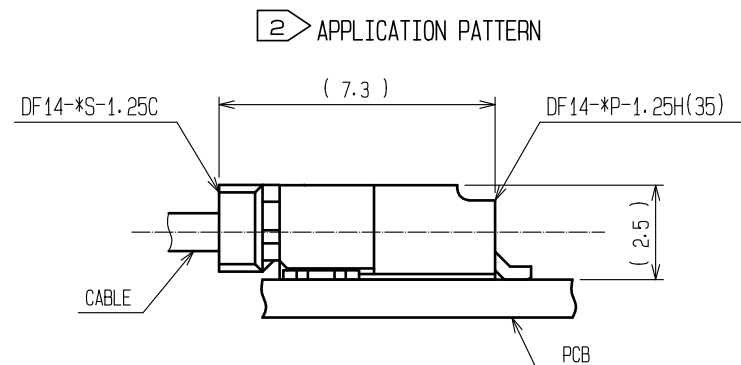
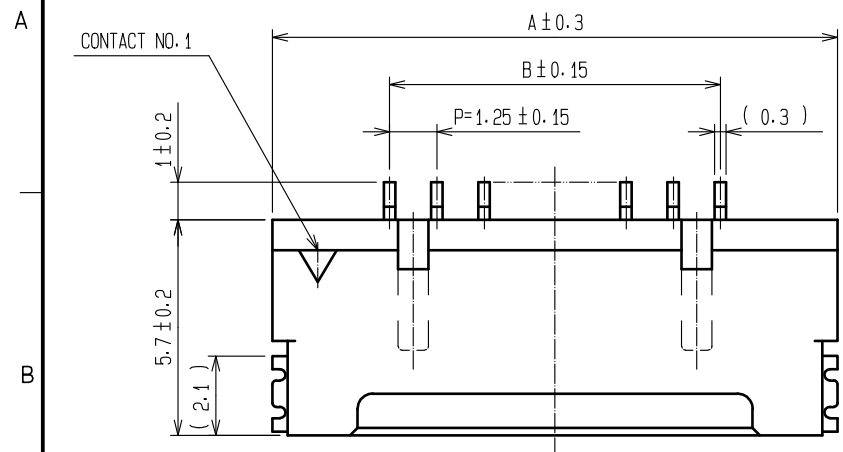
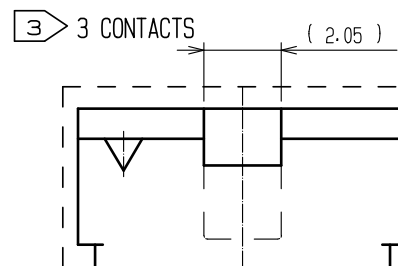
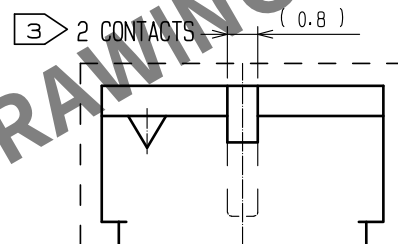
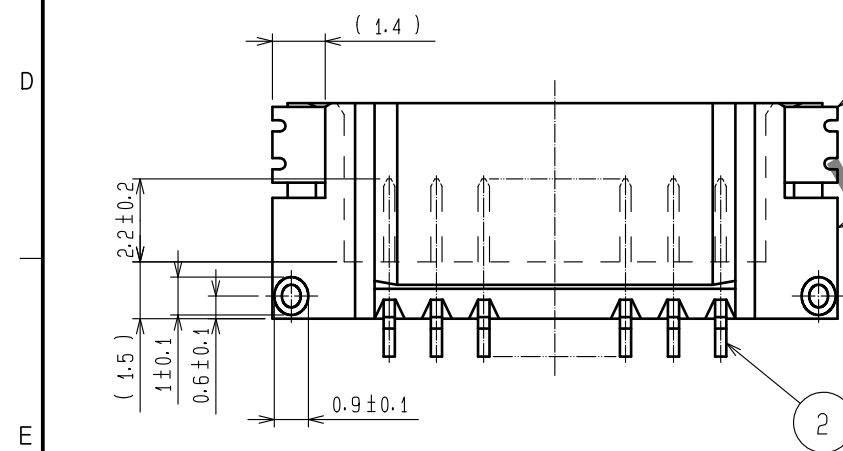


Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.




△ (DELETE 1 ITEM IN THE TABLE)

PART NO.	HRS NO.	CONTACTS	A	B	C	D	E	F
DF14- 2P-1.25H(35)	CL538-0021-4-35	2	7.45	1.25	2.95	3.65	6.45	8.05
DF14- 3P-1.25H(35)	CL538-0022-7-35	3	8.70	2.50	4.20	4.90	7.70	9.30
DF14- 4P-1.25H(35)	CL538-0023-0-35	4	9.95	3.75	5.45	6.15	8.95	10.55
DF14- 5P-1.25H(35)	CL538-0024-2-35	5	11.20	5.00	6.70	7.40	10.20	11.80
DF14- 6P-1.25H(35)	CL538-0025-5-35	6	12.45	6.25	7.95	8.65	11.45	13.05
DF14- 7P-1.25H(35)	CL538-0026-8-35	7	13.70	7.50	9.20	9.90	12.70	14.30
DF14- 8P-1.25H(35)	CL538-0027-0-35	8	14.95	8.75	10.45	11.15	13.95	15.55
DF14-10P-1.25H(35)	CL538-0029-6-35	10	17.45	11.25	12.95	13.65	16.45	18.05
DF14-15P-1.25H(35)	CL538-0084-4-35	15	23.70	17.50	19.20	19.90	22.70	24.30
DF14-20P-1.25H(35)	CL538-0089-8-35	20	29.95	23.75	25.45	26.15	28.95	30.55
DF14-25P-1.25H(35)	CL538-0094-8-35	25	36.20	30.00	31.70	32.40	35.20	36.80
DF14-30P-1.25H(35)	CL538-0020-1-35	30	42.45	36.25	37.95	38.65	41.45	43.05

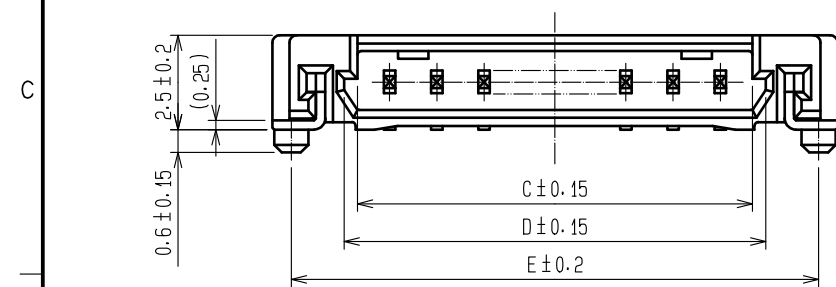

4> RECOMMENDED PATTERN

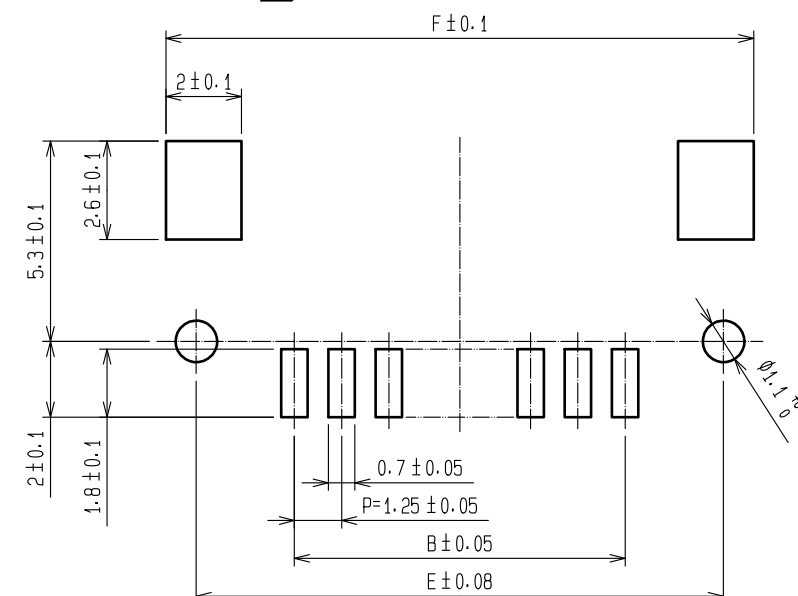

- NOTE 1. LEAD CO-PLANALITY INCLUDE REINFORCED METAL FITTINGS SHALL BE 0.1 MAX.
2> WHEN THIS CONNECTOR MATES WITH DF14-*S-1.25C , THE MATING LENGTH IS 7.3mm.
3> FOR CONNECTORS , 2 OR 3 CONTACTS , SIMPLIFIED LOCK HOLE SHALL BE SET AT THE CENTER OF HOUSING.
4> RECOMMENDED METAL MASK THICKNESS:0.15mm
OPEN AREA RETIO:100%

3	PHOSPHOR BRONZE	TIN PLATED 1μm min UNDER PLATING:NICKEL PLATED 1μm min	5	ELASTOMER	GREEN
2	BRASS	TIN PLATED 1μm min UNDER PLATING:NICKEL PLATED 1μm min		R. PVC	ELECTROSTATIC PROTECTION, CLEAR
1	POLYAMIDE	BEIGE, UL94V-0			
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 5 : 1	COUNT 2	DESCRIPTION OF REVISIONS DIS-H-00007014	DESIGNED HK. HAYASHI
HIROSE ELECTRIC CO., LTD.		APPROVED : HS. OKAWA	20200330	DRAWING NO.	EDC-160307-35-00
		CHECKED : TS. KUMAZAWA	20200330	PART NO.	DF14- *P-1.25H(35)
		DESIGNED : HK. HAYASHI	20200330	CODE NO.	CL538-
		DRAWN : DS. HIROWATARI	20200326		
		DATE	20201211	CHECKED	TS. KUMAZAWA

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

