



	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
✓1	3	RE-F-09671	K.N	H.Y	04.04.08	△				.
✓2	1	DIS-F-000293	K.D	H.O	05.07.28	△				.
✓3					.	△				.

RECOMMENDED LAND PATTERN DIMENSION OF P.C.B. (MOUNTING SIDE)

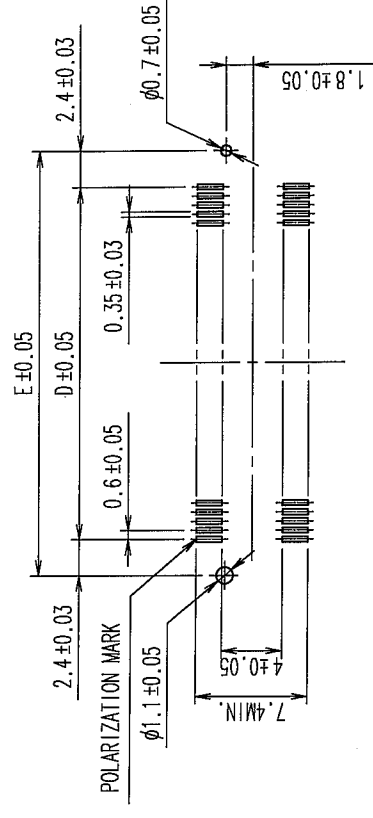

DIMENSION TABLE OF CONNECTOR AND P.C.B. LAND PATTERN.

PART No.	CODE No.			A	B	C	D	E
FX8C- 60S-SV(93)	CL578-0801-2-93	60	×	24.60	23.05	20.80	17.40	22.20
FX8C- 80S-SV(93)	CL578-0803-8-93	80	×	30.60	29.05	26.80	23.40	28.20
FX8C-100S-SV(93)	CL578-0805-3-93	100	×	36.60	35.05	32.80	29.40	34.20
FX8C-120S-SV(93)	CL578-0806-6-93	120	—	42.60	41.05	38.80	35.40	40.20
FX8C-140S-SV(93)	CL578-0807-9-93	140	—	48.60	47.05	44.80	41.40	46.20

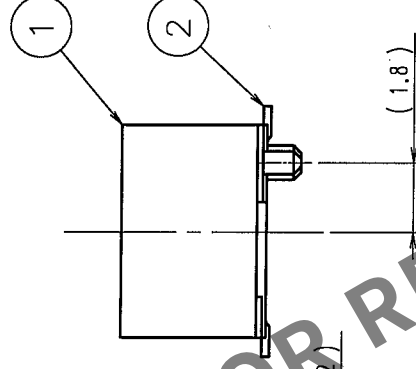

- NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
- SEE NEXT PAGE FOR DETAILS.
3. THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
- SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
4. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED.
5. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
6. NUMBER OF CONTACTS.
7. EXISTENCE

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1 μ m min. LEAD AREA: GOLD FLASH UNDER PLATING: NICKEL 0.5 μ m min.
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS

CODE NO. (OLD)		DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED
CL						
		S. SUZUKI	K. NAKAMURA	H. OKAWA	Y. YOSHIMURA	
		03.02.07	03.02.17	03.02.18	03.02.19	

			DRAWING NO.		PART NO.	FX8C-**-S-SV(93)	
SCALE		FREE		EDC3-151022-23			
UNITS		mm		HRS		CL578	1/2
				HIROSE ELECTRIC CO., LTD			



1

7



8

COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE

UNREELING DIRECTION

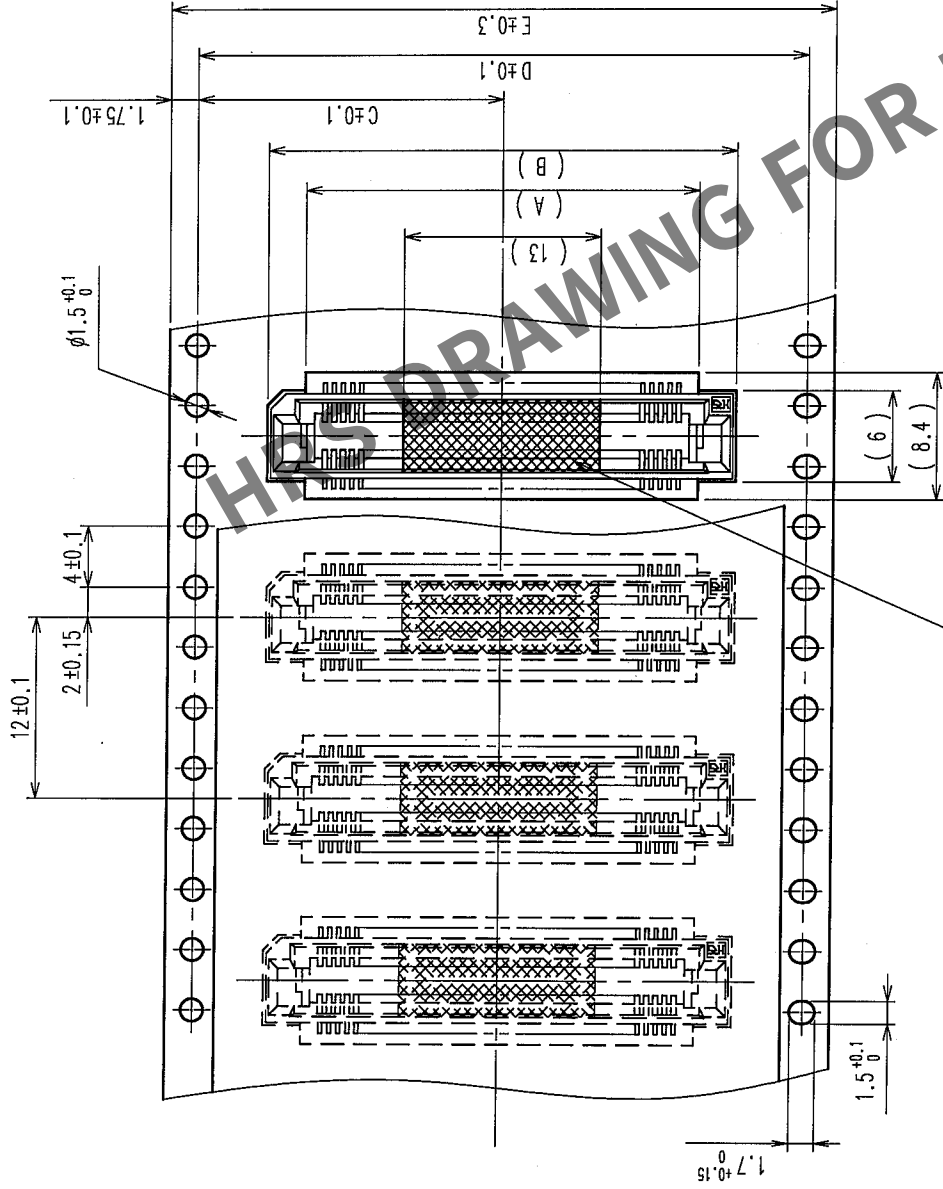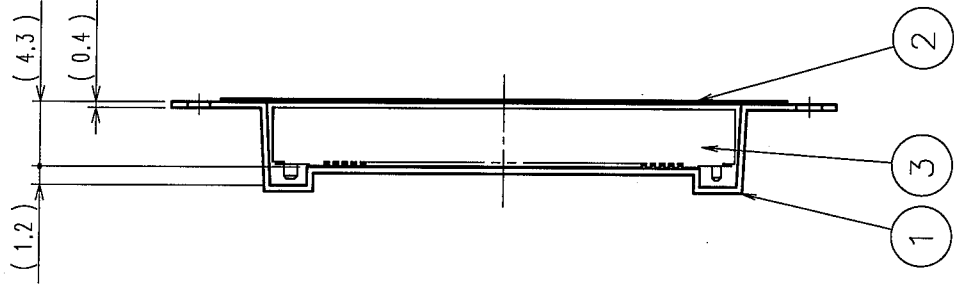


REEL DIMENSION

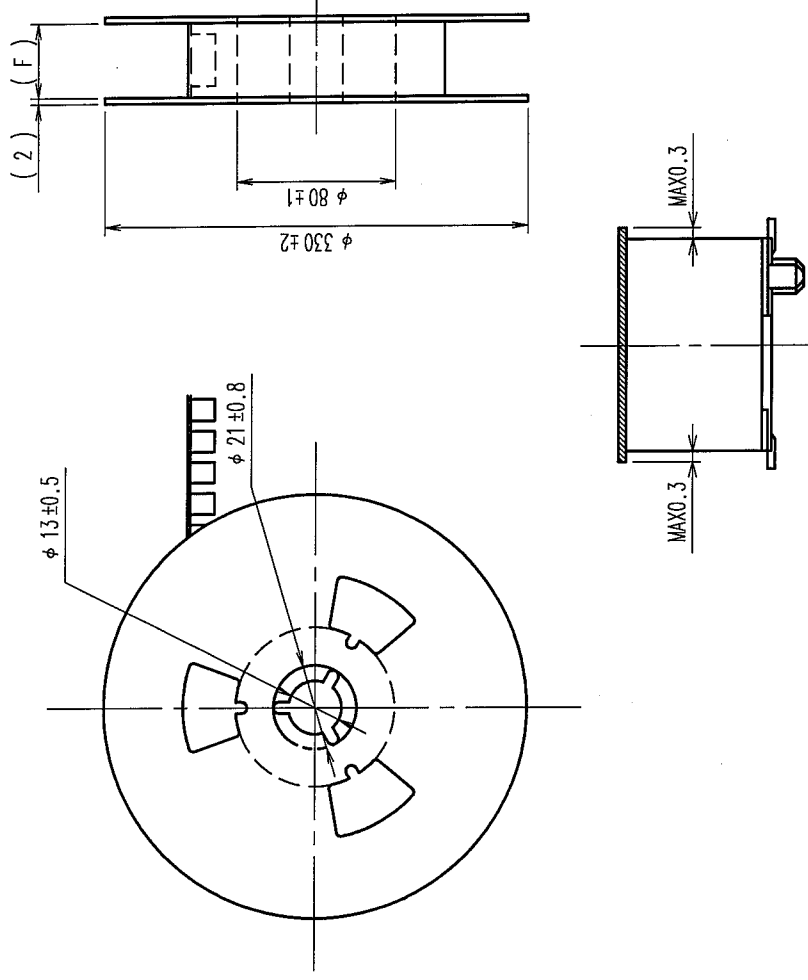

DETAIL OF TAPE FOR VACUUM PICKUP(5:1)

△ DIMENSION TABLE OF EMBOSSED CARRIER TAPE AND REEL.

PART No.	CODE No.	2	3	A	B	C	D	E	F
FX8C- 60S-SV(93)	CL578-0801-2-93	60	X	20	25	20.2	40.4	44	44.4
FX8C- 80S-SV(93)	CL578-0803-8-93	80	X	26	31	20.2	40.4	44	44.4
FX8C-100S-SV(93)	CL578-0805-3-93	100	X	32	37	26.2	52.4	56	56.4
FX8C-120S-SV(93)	CL578-0806-6-93	120	—	38	43	26.2	52.4	56	56.4
FX8C-140S-SV(93)	CL578-0807-9-93	140	—	44	49	34.2	68.4	72	72.4

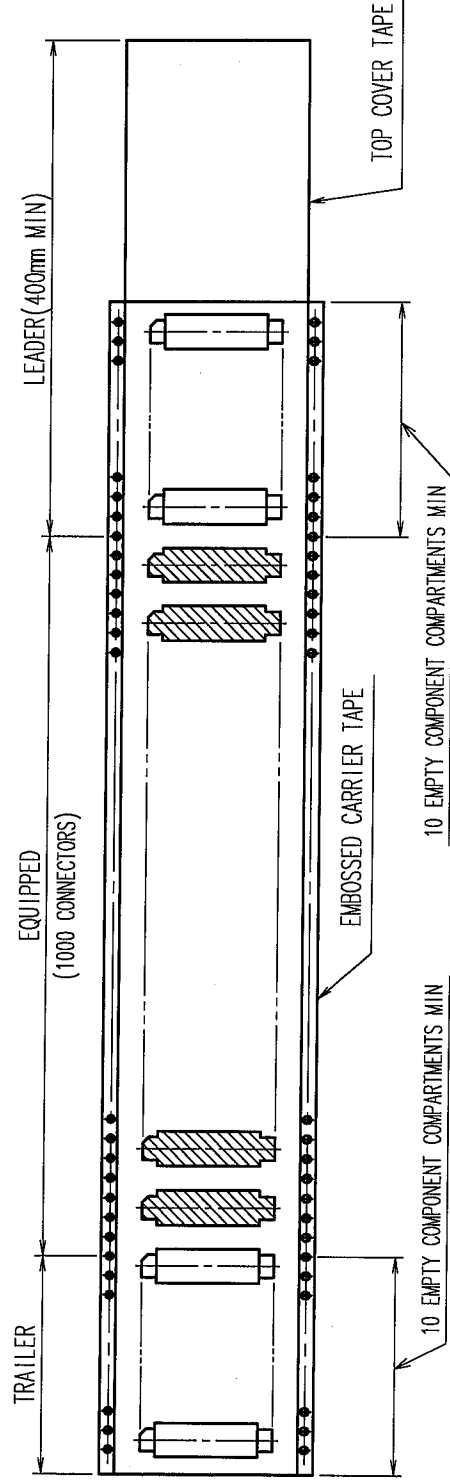

NOTE 1. 1 REEL : 1000 CONNECTORS
2 NUMBER OF CONTACTS
3 EXISTENCE
X : PRODUCED, - : NO PRODUCED

TO
PCK

2	POLYESTER	(TOP COVER TAPE)	4	POLYIMIDE	(TAPE FOR VACUUM PICKUP)
1	PS	(EMBOSSED CARRIER TAPE)	3		(CONNECTOR)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL					
DRAWN S. SUZUKI			DESIGNED K. NAKAMURA	CHECKED H. OKAWA	APPROVED Y. YOSHIMURA
03.02.07			03.02.17	03.02.18	03.02.19
SCALE FREE			PART NO. FX8C- * S-SV (93)		
UNITS			CODE NO.		
mm			CL578		

HIROSE ELECTRIC CO., LTD

CL578

2

1

2

3

4

5

6

7

8