


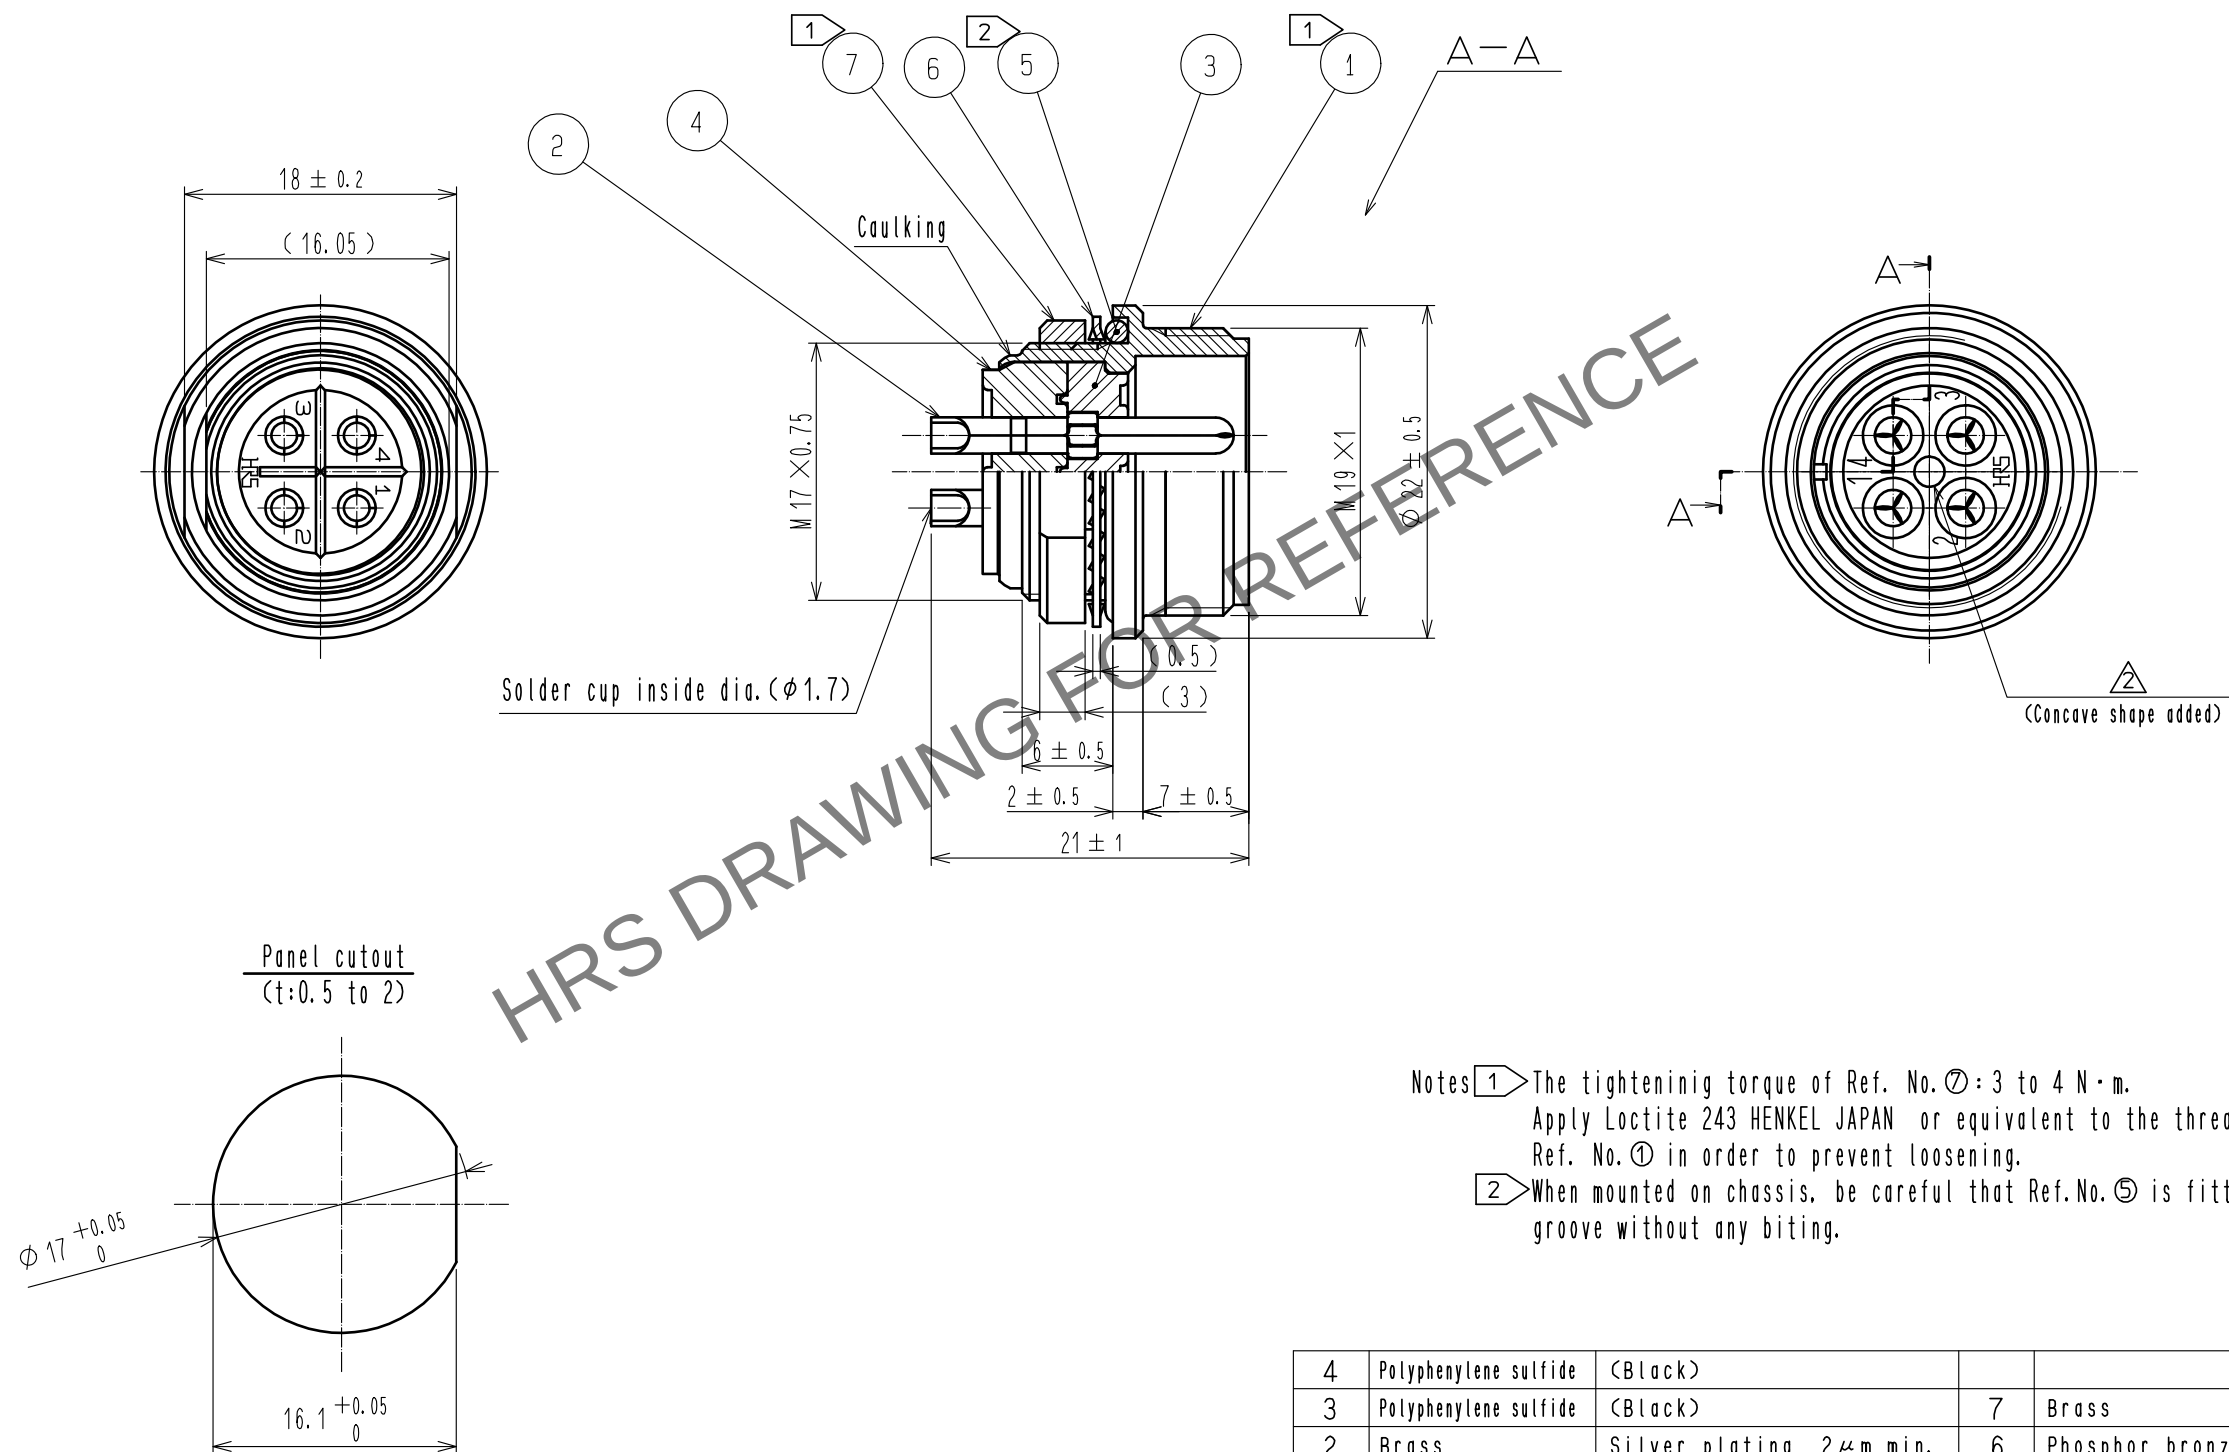

- Notes
- The tightening torque of Ref. No. ⑦: 3 to 4 N·m.  
Apply Loctite 243 HENKEL JAPAN or equivalent to the threaded portion (M17×0.75) of Ref. No. ① in order to prevent loosening.
  - When mounted on chassis, be careful that Ref.No. ⑤ is fitted into the indicated groove without any biting.

|                           |                       |                         |            |                                            |                        |
|---------------------------|-----------------------|-------------------------|------------|--------------------------------------------|------------------------|
| 4                         | Polyphenylene sulfide | (Black)                 |            |                                            |                        |
| 3                         | Polyphenylene sulfide | (Black)                 | 7          | Brass                                      | Nickel plating         |
| 2                         | Brass                 | Silver plating 2μm min. | 6          | Phosphor bronze                            | Nickel plating         |
| 1                         | Zinc alloy            | Chrome plating          | 5          | Silicone rubber                            | (Black)                |
| NO.                       | MATERIAL              | FINISH . REMARKS        | NO.        | MATERIAL                                   | FINISH . REMARKS       |
| UNITS<br>mm               |                       | SCALE<br>2 : 1          | COUNT<br>1 | DESCRIPTION OF REVISIONS<br>DIS-C-00016536 | DESIGNED<br>TY. SUZUKI |
| HIROSE ELECTRIC CO., LTD. |                       | APPROVED : TP. KOMATSU  | 20230613   | DRAWING NO.                                | EDC-111073-81-00       |
|                           |                       | CHECKED : HY. KOBAYASHI | 20230613   | PART NO.                                   | RM15WTRZ-4P(81)        |
|                           |                       | DESIGNED : HT. ZENBA    | 20230613   | CODE NO.                                   | CL0109-1633-8-81       |
|                           |                       | DRAWN : KR. SUZUKI      | 20230613   |                                            |                        |