
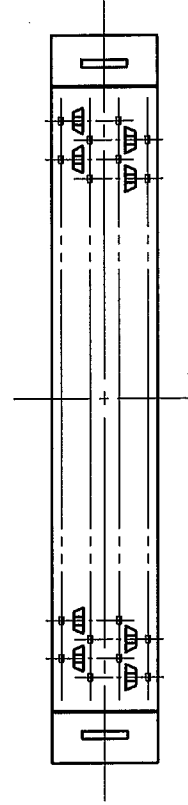
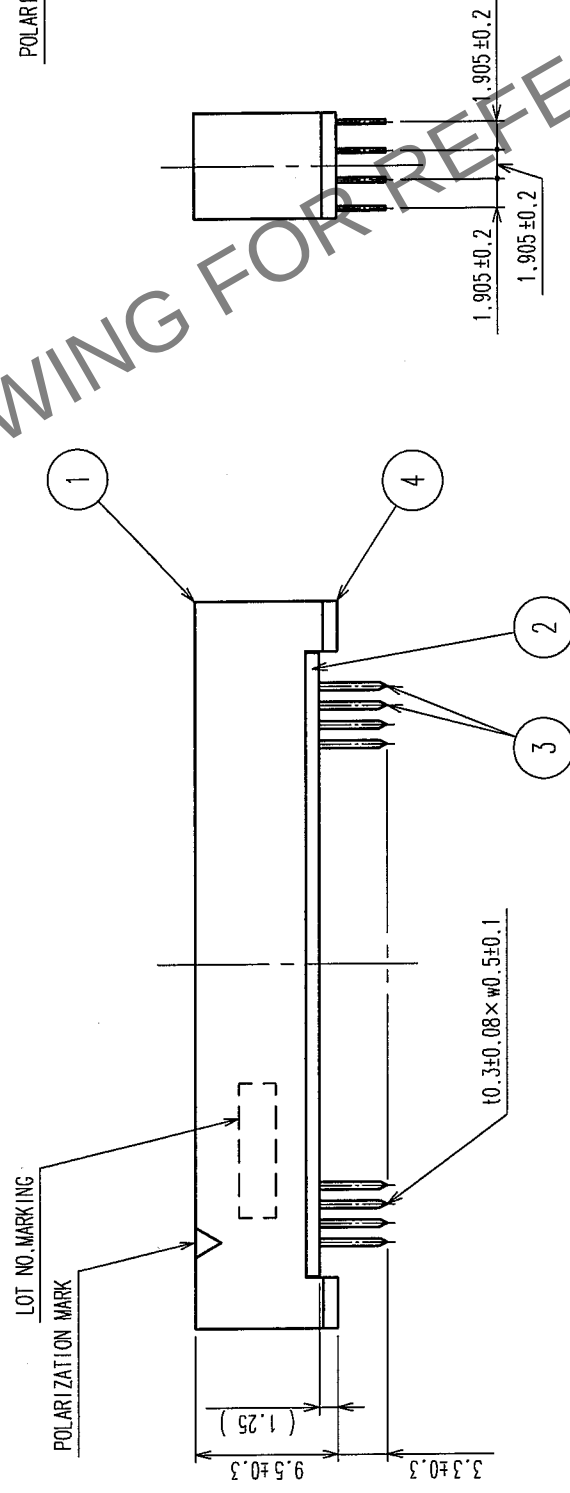


COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE
	△						△				
	△						△				
	△						△				

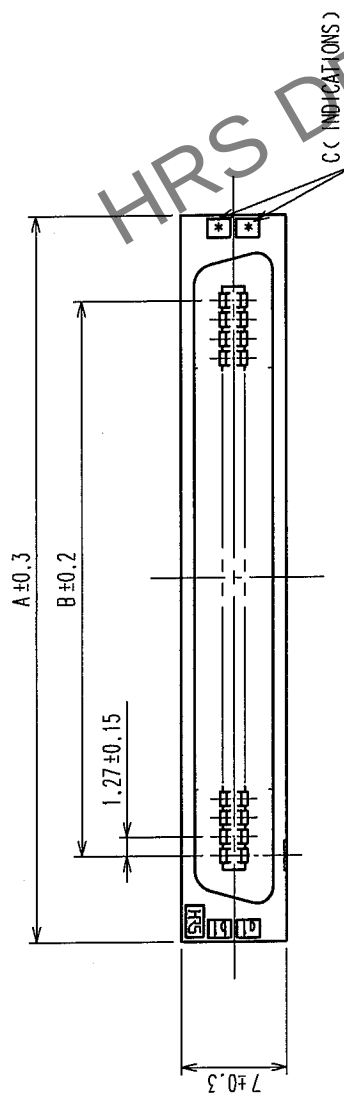

PART No.	CODE No.	2	A	B	C
FX2C1-20P-1, 2TDSA(71)	CL572-2211-1-71	20	22.75	11.43	10
FX2C1-32P-1, 2TDSA(71)	CL572-2212-4-71	32	30.37	19.05	16
FX2C1-40P-1, 2TDSA(71)	CL572-2213-7-71	40	35.45	24.13	20
FX2C1-52P-1, 2TDSA(71)	CL572-2214-0-71	52	43.07	31.75	26
FX2C1-60P-1, 2TDSA(71)	CL572-2215-2-71	60	48.15	36.83	30
FX2C1-68P-1, 2TDSA(71)	CL572-2216-5-71	68	53.23	41.91	34
FX2C1-80P-1, 2TDSA(71)	CL572-2217-8-71	80	60.85	49.53	40
FX2C1-100P-1, 2TDSA(71)	CL572-2218-0-71	100	73.55	62.23	50
FX2C1-120P-1, 2TDSA(71)	CL572-2219-3-71	120	86.25	74.93	60

NOTES 1. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
2. NUMBER OF PIN.

4		POLYAMIDE	BLACK	UL94V-0	3	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.2μ m min			
1,2		POLYAMIDE	BLACK	UL94V-0			DIP AREA:TIN-PLATING 2μ m min			
NO.		MATERIAL	FINISH, REMARKS		NO.	MATERIAL	UNDER PLATING:NICKEL 2μ m min			
CODE NO. (OLD)		CL			DRAWN	DESIGNED	CHECKED	APPROVED	RELEASED	
					I. OKAYAMA	K. NAKAMURA	H. OKAWA	H. OKAWA		
					04.06.02	04.06.02	04.06.09	04.06.09	.	
DRAWING NO.		PART NO.								
EDC3-083047-21		FX2C1-**-P-1.27DSA(71)								
SCALE		FREE			CODE NO.		CL572			
UNITS		mm			HIROSE ELECTRIC CO., LTD		1/1			

TO	PCK			
----	-----	--	--	--