

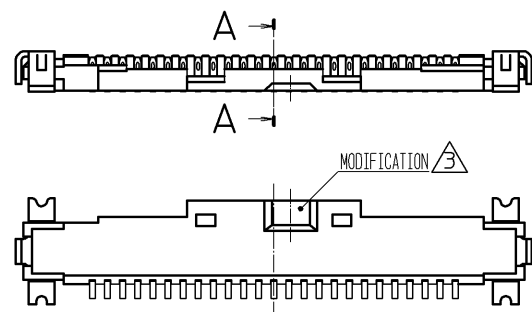
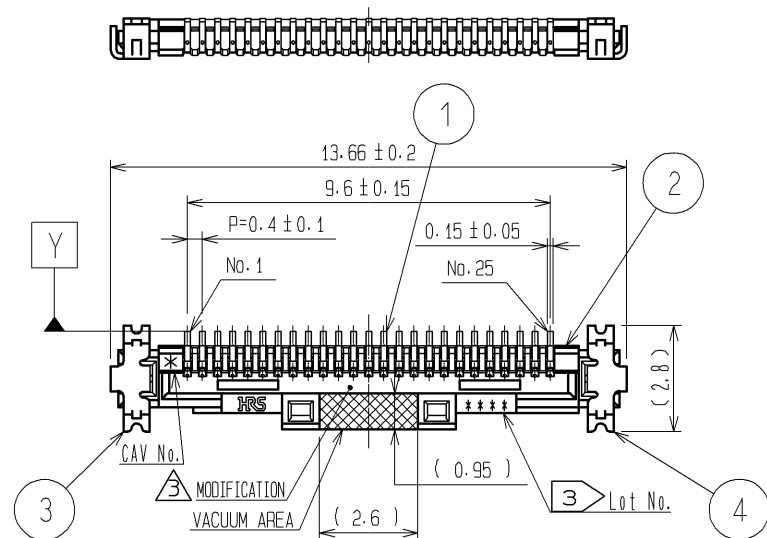


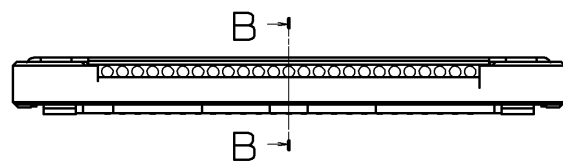


MATING FIGURE

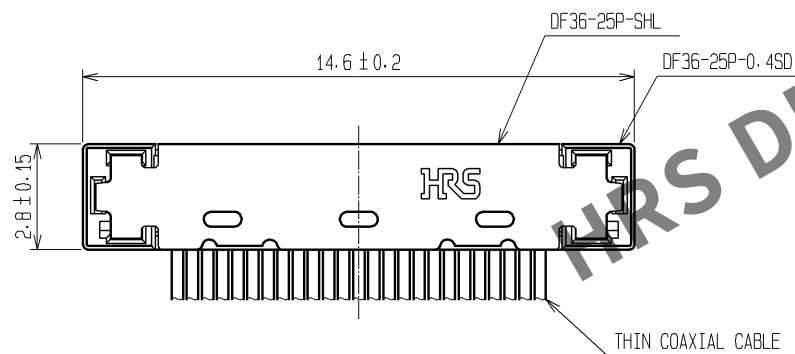


NOTES

1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. STIFFENER IS REQUIRED FOR MOUNTING ONTO FPC IN ORDER TO AVOID STRESS BY FPC SLACKING TO MOUNTED CONNECTOR.
3. LOT No. INFORMATION IS SHOWN IN THE TABLE.
EXAMPLE: 96FD
→YEAR:2009 MONTH:July DAY:15 LINE No.:4
4. UNMATING SHALL BE DONE WITH THE SPECIFIC EXTRACTION TOOL.

YEAR		MONTH		DAY						LINE No.	
YEAR	CODE	MONTH	CODE	DAY	CODE	DAY	CODE	DAY	CODE	LINE No.	CODE
10	0	Jan	A	1	1	11	B	21	M	1	A
11	1	Feb	B	2	2	12	C	22	N	2	B
12	2	Mar	C	3	3	13	D	23	P	3	C
13	3	Apr	D	4	4	14	E	24	Q	4	D
14	4	May	E	5	5	15	F	25	R	5	E
15	5	Jun	F	6	6	16	G	26	S	6	F
16	6	Jul	G	7	7	17	H	27	T	7	G
17	7	Aug	H	8	8	18	J	28	U	8	H
18	8	Sep	I	9	9	19	K	29	V	9	I
09	9	Oct	J	10	A	20	L	30	W	10	J
		Nov	K					31	X		
		Dec	L								

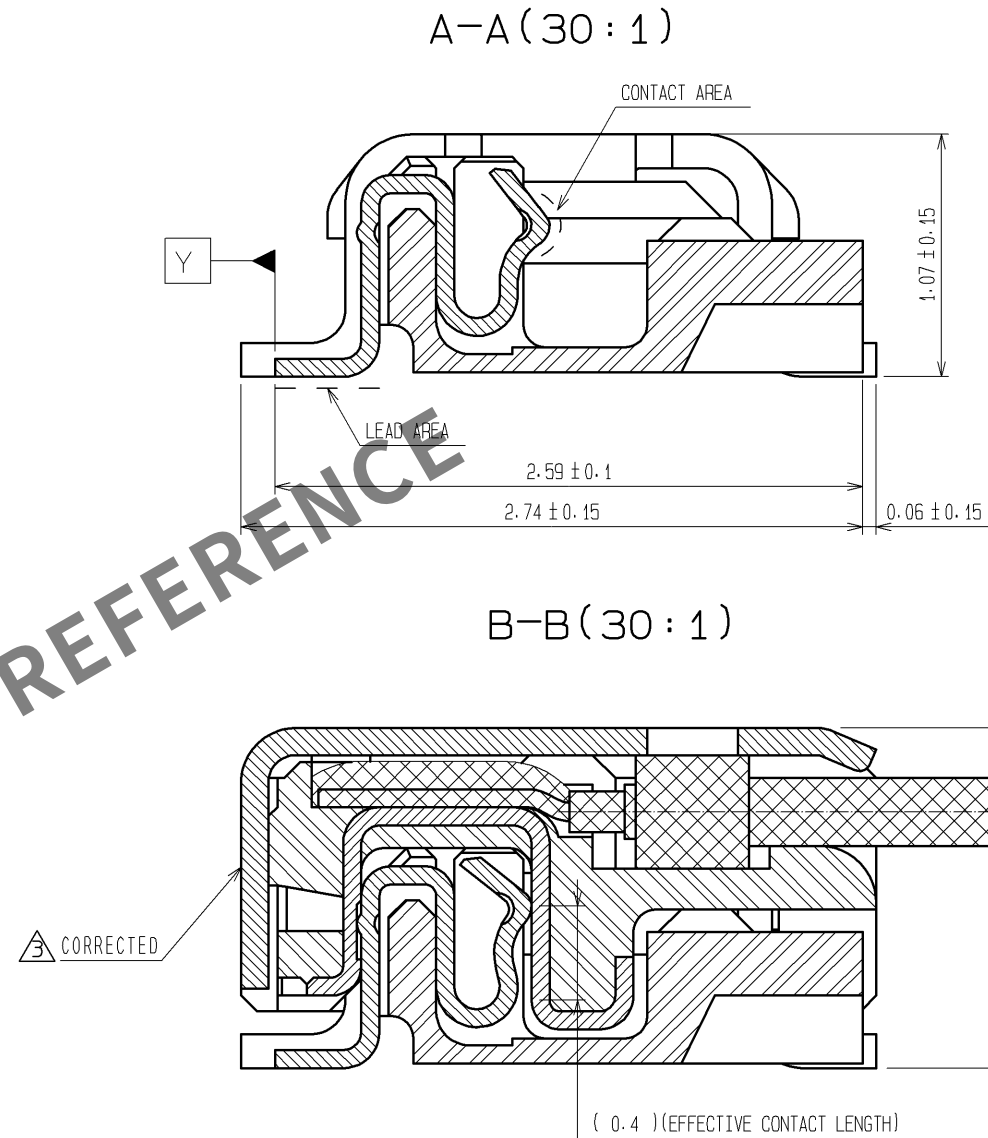

3	PHOSPHOR BRONZE	WHOLE AREA : Au PLATING 0.1μm min UNDER PLATING : Ni PLATING 2μm min	7	PS	BLACK
			6	POLYESTER	CLEAR
2	LCP	UL94V-0	5	PS	CLEAR
1	PHOSPHOR BRONZE	CONTACT AREA : Au PLATING 0.3μm min LEAD AREA : Au PLATING 0.1μm min UNDER PLATING : Ni PLATING 2μm min	4	PHOSPHOR BRONZE	WHOLE AREA : Au PLATING 0.1μm min UNDER PLATING : Ni PLATING 2μm min
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm		SCALE 5 : 1	COUNT 4	DESCRIPTION OF REVISIONS DIS-H-003739	
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : TY. OMA	07. 05. 18	DESIGNED HY. SHIOZAWA	CHECKED TS. FUKUSHIMA
		CHECED : TS. SAKATA	07. 05. 18	DATE 09. 03. 11	
		DESIGNED : MN. KENJO	07. 05. 17	DRAWING NO. EDC3-312852-01	
		DRAWN : HY. SHIOZAWA	07. 05. 15	PART NO. DF36-25S-0.4V(51)	
				CODE NO. CL662-4005-1-51	1/2



--	--

 3.1 ± 0.05  GROUND AREA

NO

D
P
C