
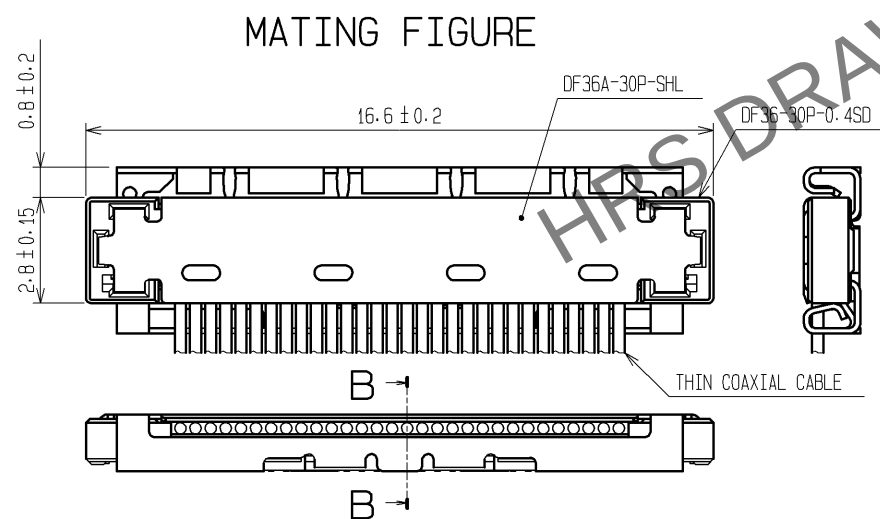
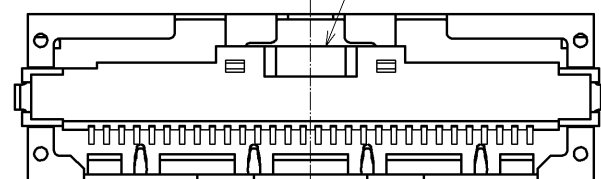



Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

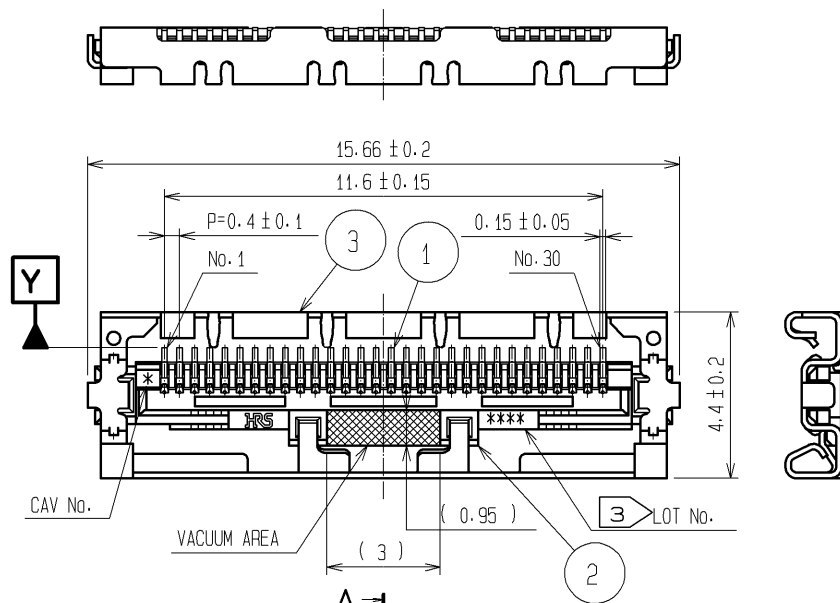


NOTES

1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. STIFFENER IS REQUIRED FOR MOUNTING ONTO FPC IN ORDER TO AVOID STRESS BY FPC SLACKING TO MOUNTED CONNECTOR.
- LOT No. INFORMATION IS SHOWN IN THE TABLE.
EXAMPLE: 8GFD
→YEAR:2008 MONTH:July DAY:15 LINE No.:4
4. UNMATING SHALL BE DONE WITH THE SPECIFIC EXTRACTION TOOL.
5. SOLDERING REWORK IS NOT POSSIBLE SINCE SOLDERING LEADS ARE COVERED BY METAL SHIELDING.


3

YEAR		MONTH		DAY				LINE No.	
YEAR	CODE	MONTH	CODE	DAY	CODE	DAY	CODE	DAY	CODE
10	0	Jan	A	1	1	11	B	21	M
11	1	Feb	B	2	2	12	C	22	N
12	2	Mar	C	3	3	13	D	23	P
13	3	Apr	D	4	4	14	E	24	Q
14	4	May	E	5	5	15	F	25	R
15	5	Jun	F	6	6	16	G	26	S
16	6	Jul	G	7	7	17	H	27	T
17	7	Aug	H	8	8	18	J	28	U
08	8	Sep	I	9	9	19	K	29	V
09	9	Oct	J	10	A	20	L	30	W
		Nov	K			31	X		
		Dec	L						

A-A(30:1) △

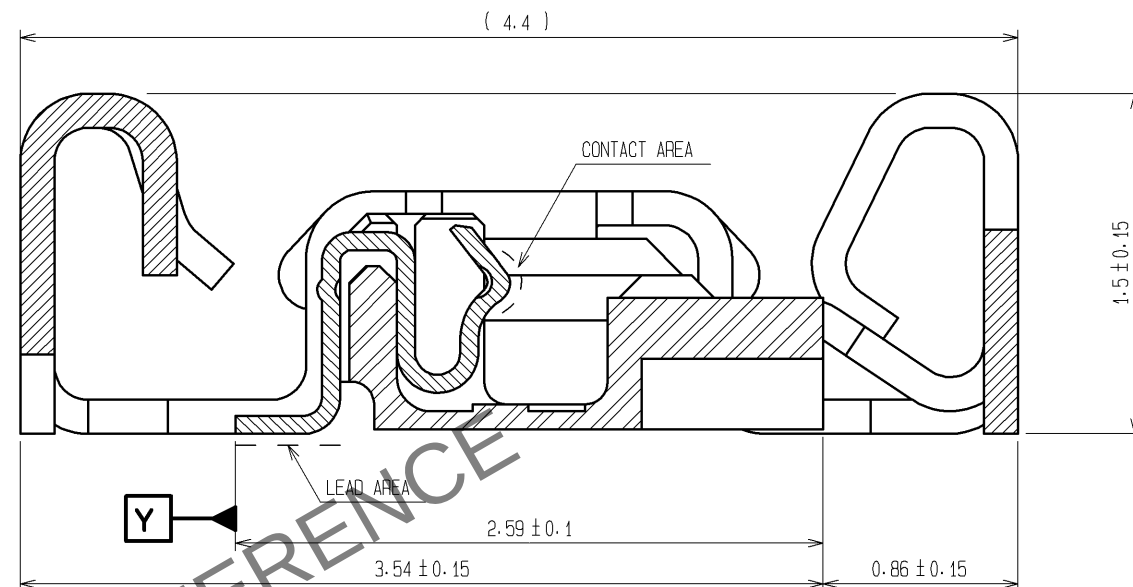

B-B(30:1) △

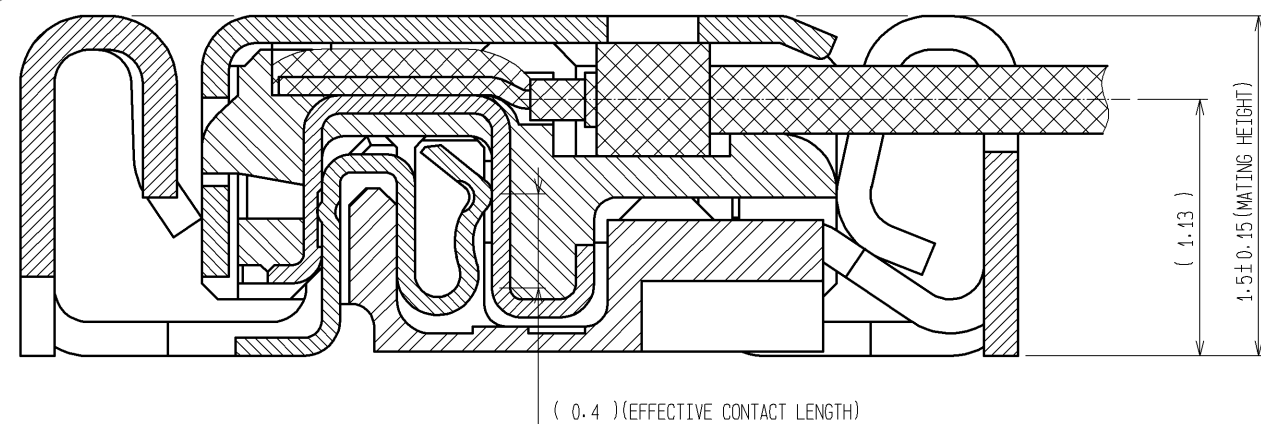

2	LCP	UL94V-0	6	PS	BLACK
1	PHOSPHOR BRONZE	CONTACT AREA : Au PLATING 0.3µm min LEAD AREA : Au PLATING 0.1µm min UNDER PLATING : Ni PLATING 2µm min	5	POLYESTER	CLEAR
			4	PS	CLEAR
NO.	MATERIAL	FINISH , REMARKS	3	PHOSPHOR BRONZE	WHOLE AREA : Sn PLATING 1µm min UNDER PLATING : Cu PLATING 0.2µm min
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
UNITS mm	SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-H-003181	DESIGNED SI. ISHII	CHECKED HK. UMEHARA
APPROVED : TY. OMA		07. 04. 06	DRAWING NO. EDC3-315346-01		
CHECED : TS. SAKATA		07. 04. 06	PART NO. DF36A-30S-0.4V(51)		
DESIGNED : MN. KENJO		07. 04. 05	CODE NO. CL662-4017-0-51		
DRAWN : MN. KENJO		07. 04. 05			

Apr.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

