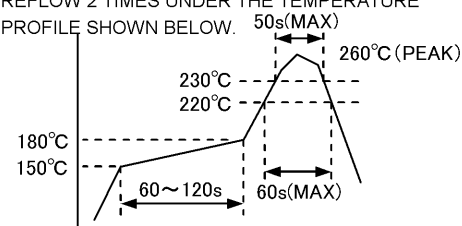


APPLICABLE STANDARD					
RATING	OPERATING TEMPERATURE RANGE	-55 °C TO 85 °C ^{(1) (2)}	STORAGE TEMPERATURE RANGE	-10 °C TO 60 °C ⁽³⁾	
	OPERATING HUMIDITY RANGE	RH 85 % MAX ^{(2) (4)}	STORAGE HUMIDITY RANGE	RH 70 % MAX ^{(3) (4)}	
	VOLTAGE	60 V AC	CURRENT	0.5 A	
SPECIFICATIONS					
ITEM		TEST METHOD	REQUIREMENTS	QT	AT
CONSTRUCTION					
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.	ACCORDING TO DRAWING.	×	×
MARKING		CONFIRMED VISUALLY.		×	×
ELECTRIC CHARACTERISTICS					
CONTACT RESISTANCE		20 mV MAX, 1 mA(DC OR 1000Hz)	80 mΩ MAX. ⁽⁵⁾	×	
INSULATION RESISTANCE		100 V DC.	500 MΩ MIN.	×	
VOLTAGE PROOF		200 V AC FOR 1 min.	NO FLASHOVER OR BREAKDOWN.	×	
MECHANICAL CHARACTERISTICS					
INSERTION AND WITHDRAWAL FORCES		MEASURED BY APPLICABLE CONNECTOR.	INSERTION FORCE: 20.5 N MAX. WITHDRAWAL FORCE: 2.05 N MIN.	×	
MECHANICAL OPERATION		50 TIMES INSERTIONS AND EXTRACTIONS.	① CONTACT RESISTANCE: NO VARIATION OF 20 mΩ OR MORE FROM INITIAL VALUE. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	×	
VIBRATION		FREQUENCY 10 TO 55 Hz, SINGL AMPLITUDE : 0.75 mm, FOR 2 h IN 3 DIRECTIONS.	① NO ELECTRICAL DISCONTINUITY OF 1 μs. ② NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	×	
SHOCK		490 m/s ² , DURATION OF PULSE 11 ms FOR 3 TIMES IN 3 DIRECTIONS.		×	
ENVIRONMENTAL CHARACTERISTICS					
DAMP HEAT (STEADY STATE)		EXPOSED AT 40±2 °C, 90 ~ 95 %, 96 h.	① CONTACT RESISTANCE: NO VARIATION OF 20 mΩ OR MORE FROM INITIAL VALUE.	×	
DRY HEAT		EXPOSED AT 85±2 °C, 96 h	② INSULATION RESISTANCE: 500 MΩ MIN.	×	
RAPID CHANGE OF TEMPERATURE		TEMPERATURE -55 → +5~+35 → +85 → +5~+35 °C TIME 30 → 5 MAX → 30 → 5 MAX min. UNDER 5 CYCLES.	③ NO DAMAGE, CRACK AND LOOSENESS OF PARTS.	×	
CORROSION SALT MIST		EXPOSED IN 5 % SALT WATER SPRAY FOR 48 h.	① CONTACT RESISTANCE: NO VARIATION OF 20 mΩ OR MORE FROM INITIAL VALUE.	×	
SULFUR DIOXIDE		EXPOSED IN 25 PPM FOR 96 h. (TEST STANDARD: JIS C 60068)	② NO DERECT SUCH AS CORROSION WHICH IMPAIRS THE FUNCTION OF CONNECTOR.	×	
AMMONIA RESISTANCE		HYDROGEN-ION CONCENTRATION(pH)=10 TEST TIME:72±4h TEMPERATURE:15~35°C.	CONTACT RESISTANCE: NO VARIATION OF 20mΩ OR MORE FROM INITIAL VALUE.	×	
RESISTANCE TO SOLDERING HEAT		1)REFLOW SOLDERING : REFLOW 2 TIMES UNDER THE TEMPERATURE PROFILE SHOWN BELOW.  2) SOLDERING IRONS : 360°C MAX. FOR 5 sec.	NO DEFORMATION OF CASE OF EXCESSIVE LOOSENESS OF THE TERMINAL.	×	
SOLDERABILITY		SOLDERED AT SOLDER TEMPERATURE 240±3°C FOR IMMERSION DURATION, 3 sec.	A NEW UNIFORM COATING OF SOLDER SHALL COVER A MINIMUM OF 95 % OF THE SURFACE BEING IMMERSED.	×	
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
△					
REMARKS			APPROVED	HS. OKAWA	10. 03. 09
(1) INCLUDE TEMPERATURE RISE CAUSED BY CURRENT-CARRYING.			CHECKED	HT. YAMAGUCHI	10. 03. 09
(2) OPERATING TEMPERATURE SHOULD BE -55 TO 40°C WHEN HUMIDITY EXCEEDS 80% RH.			DESIGNED	TP. MATSUMOTO	10. 03. 09
(3) "STORAGE" MEANS A LONG-TERM STORAGE STATE FOR THE UNUSED PRODUCT BEFORE ASSEMBLY TO PCB.			DRAWN	TP. MATSUMOTO	10. 03. 09
(4) THERE MUST NOT BE DEWFALL.					
(5) DON'T INCLUDE THE CONDUCTOR RESISTANCE OF THE CABLE OF THE COMBINATION CONNECTOR.					
Unless otherwise specified, refer to JIS-C-5402.					
Note QT:Qualification Test AT:Assurance Test X:Applicable Test			DRAWING NO.		ELC4-330389-00
HRS	SPECIFICATION SHEET		PART NO.	FX16M2-41S-0.5SV	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL575-3002-6-00	△ 1/1