
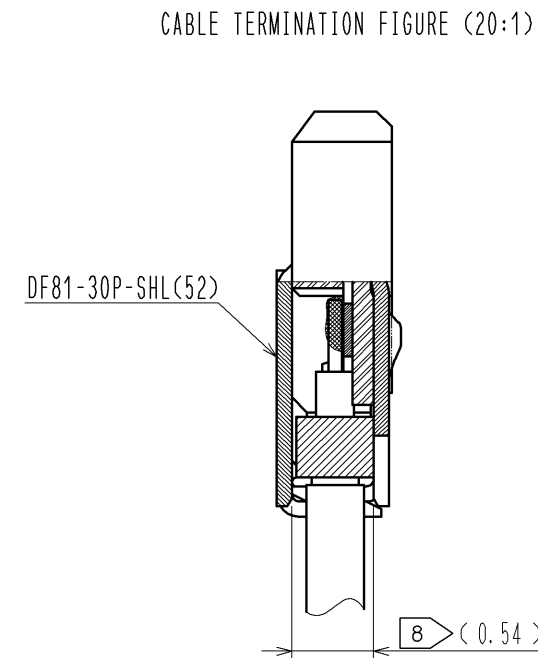
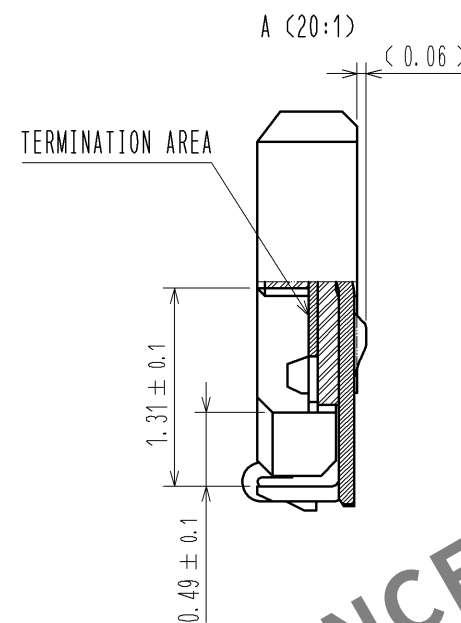
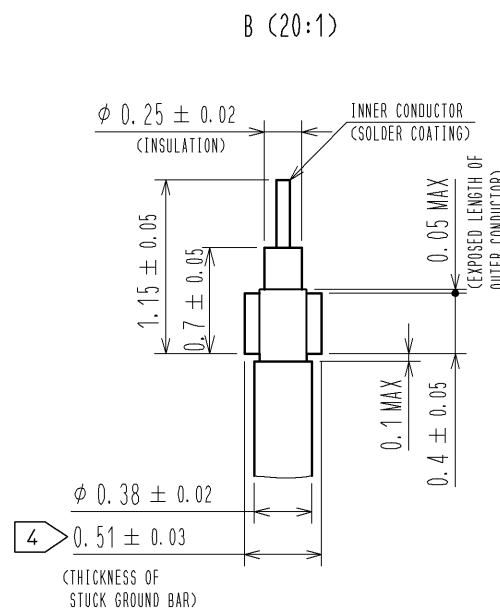

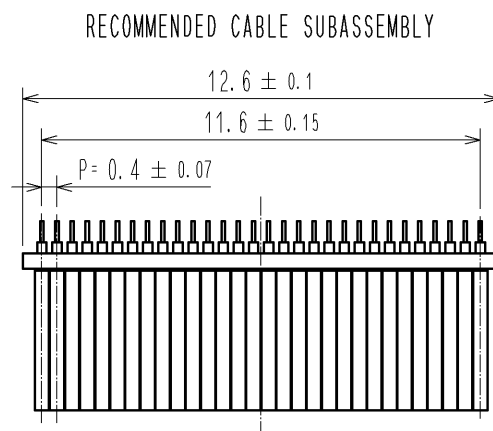
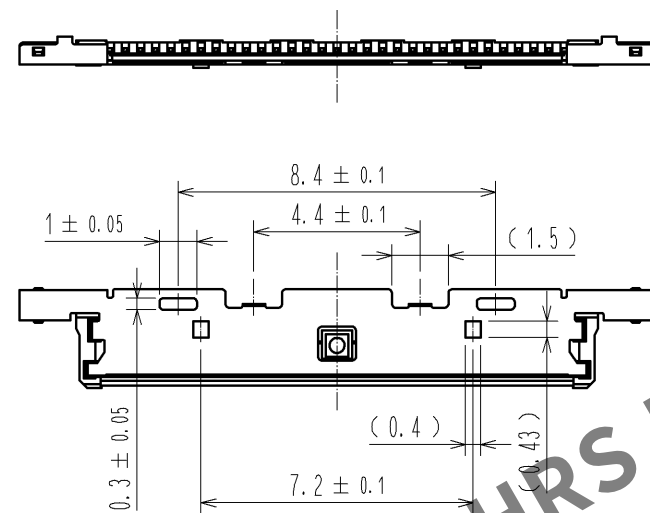
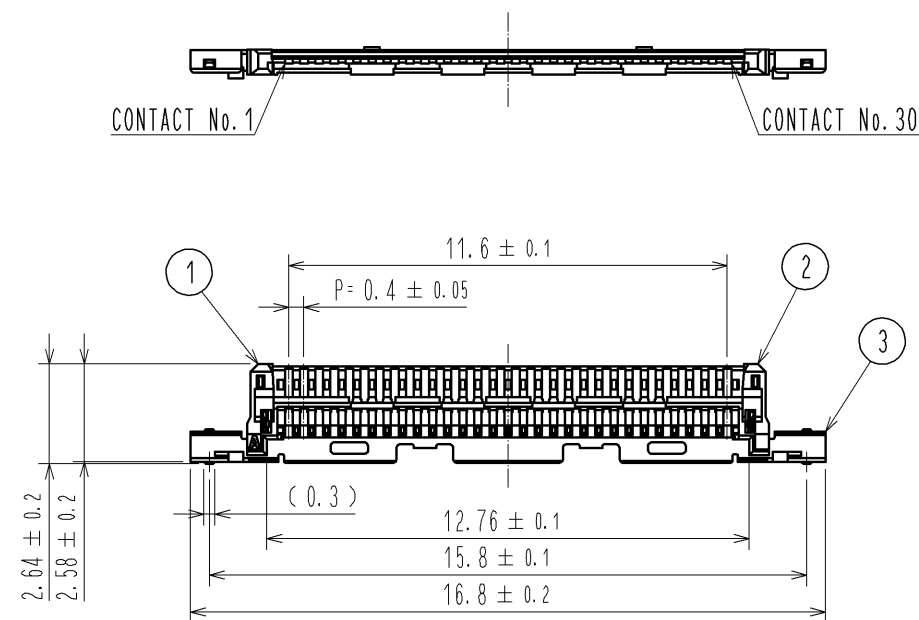






NOTES

1. APPLICABLE CABLE: MICRO COAXIAL CABLE(AWG#36~AWG#46)
2. THIS CONNECTOR IS NOT HOT PLUGGABLE. MATE AND UNMATE WHILE THE POWER IS OFF.
3. THE ASSEMBLY IS COMPLETED BY COMBINING THREE PARTS 'CONNECTOR UNIT, METAL SHIELDING' AND 'LATCH'. REFER TO THE TABLE FOR EACH ITEM No., PART NAME, PART No. AND CODE No.
4. SOLDER A GROUND BAR WITH AN EXTERNAL CONDUCTOR OF THE CABLE ABOUT STICKING A GROUND BAR TOGETHER.
5. PLEASE CONSULT ABOUT THE USE OF THE POTTING AND KAPTON TAPE SEPARATELY.
6. PLEASE ATTACH A LATCH BEFORE INCORPORATING SHELL. PLEASE REFER TO ASSEMBLY MANUAL FOR DETAILS.
7. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
8. TOTAL THICKNESS OF ENCLOSED MATERIALS : 0.54mm MAX. THICKNESS EXCEEDING THE DIMENSION DOES NOT ALLOW THE METAL SHIELDING TO BE COMPLETELY FIT IN TO THE CONNECTOR.

ITEM No.	PART NAME	PART No.	CODE No.
1. 2. 3	CONNECTOR UNIT	DF81D-30P-0.4SD(52)	CL662-8119-2-52
-	METAL SHIELDING	DF81-30P-SHL(52)	CL662-8106-0-52
-	LATCH	DF81-30P-LCH(52)	CL662-8107-3-52

			6	PS	BLACK					
			5	POLYESTER	CLEAR					
2	LCP	UL94V-0, BLACK	4	PS	CLEAR					
1	PHOSPHER BRONZE	CONTACT AREA : Au PLATING 0.1μm min TERMINATION AREA : Au PLATING 0.1μm min UNDER PLATING : Ni PLATING 1 μm min	3	SUS	CONTACT AREA : Au PLATING 0.05μm min SOLDERING AREA : Au PLATING 0.05μm min UNDER PLATING : Ni PLATING 0.2 μm min					
NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS					
UNITS mm			SCALE 5 : 1		COUNT	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
 HIROSE ELECTRIC CO., LTD.		APPROVED : MH. YAMANE		13.11.26		DRAWING NO. EDC3-351423-02				
		CHECKED : MH. TSUCHIDA		13.11.25		PART NO. DF81D-30P-0.4SD(52)				
		DESIGNED : AH. MIYAZAKI		13.11.12		CODE NO. CL662-8119-2-52				
		DRAWN : AH. MIYAZAKI		13.11.12		 1/2				

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

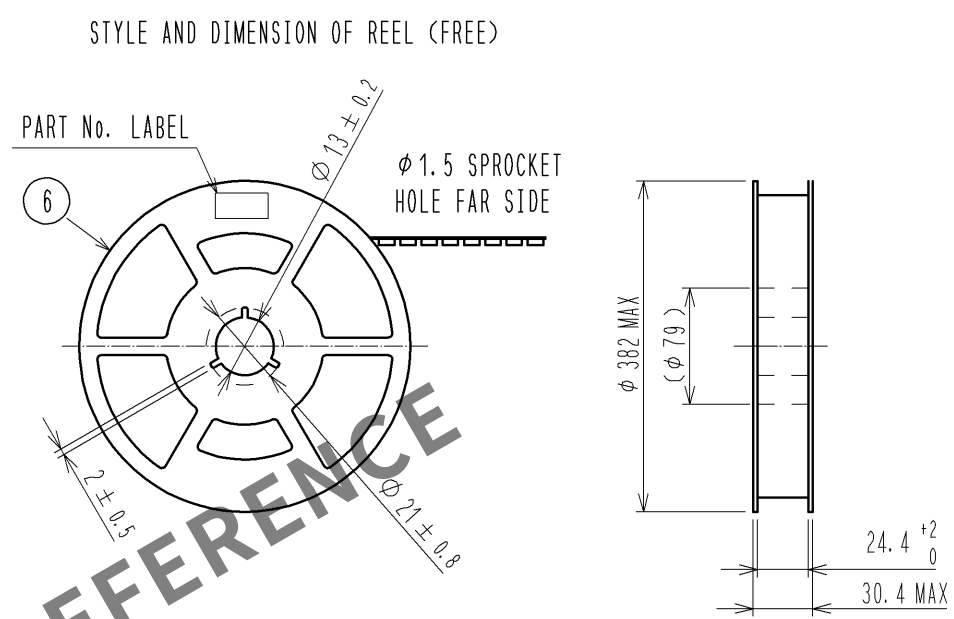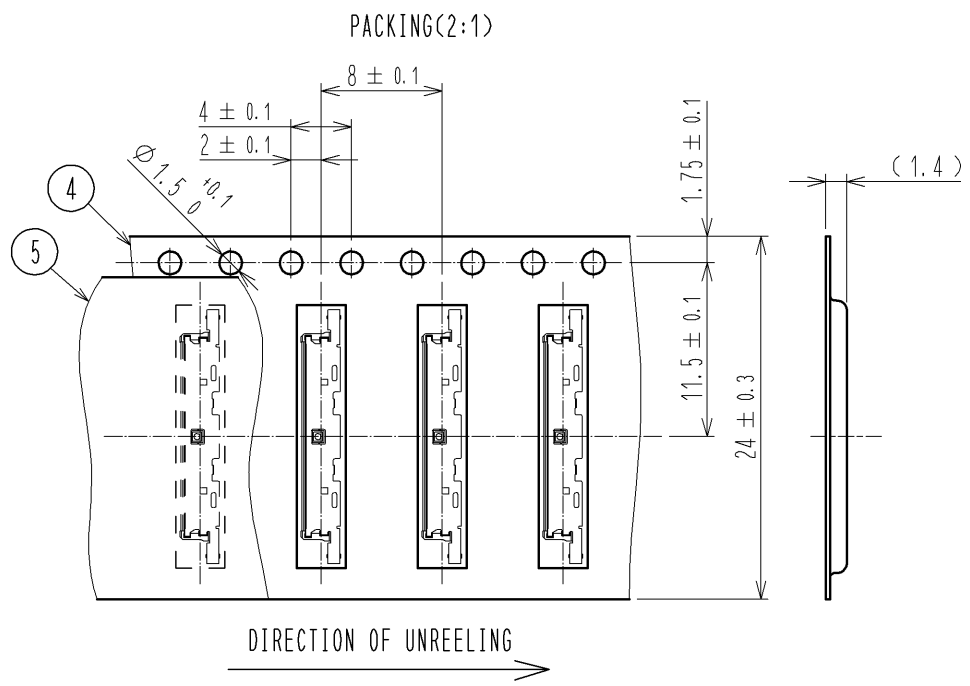

DETAIL OF PART No. LABEL (EXAMPLE)

生産月日	年 月 日
図番	CL662-8119-2-52
品名	DF81D-30P-0.4SD(52)
納入数量	500個
納入者	ヒロセ電機株式会社


SUPPLIER

QUANTITY

PART No.

CODE No.

DATE OF MANUFACTURED

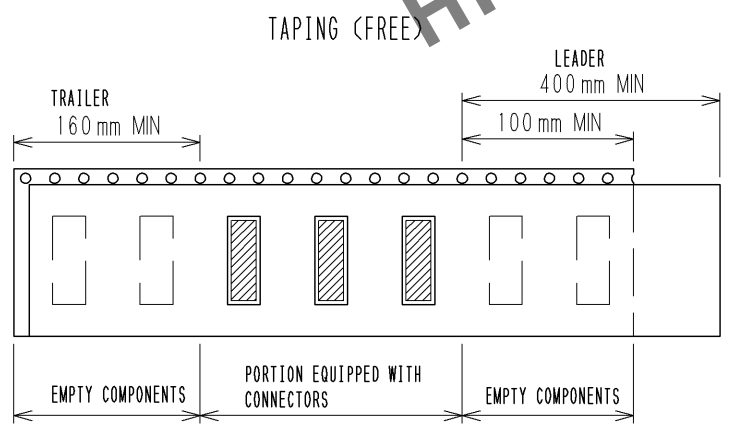

HRS	DRAWING NO.	EDC3-351423-02	
	PART NO.	DF81D-30P-0.4SD(52)	
	CODE NO.	CL662-8119-2-52	△ 2/2