

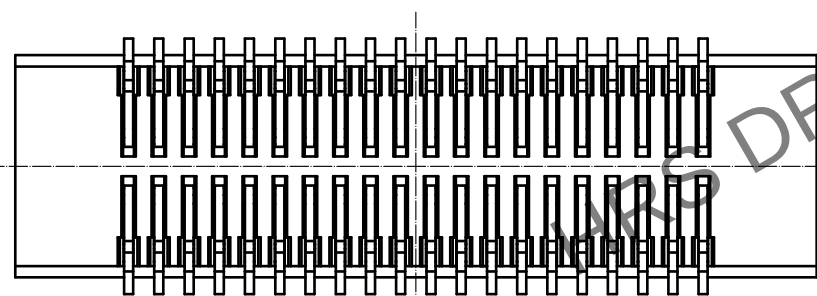
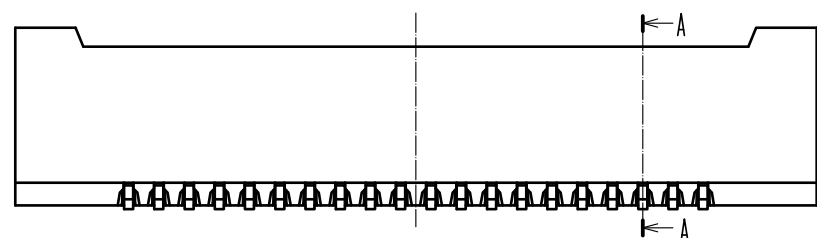




May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

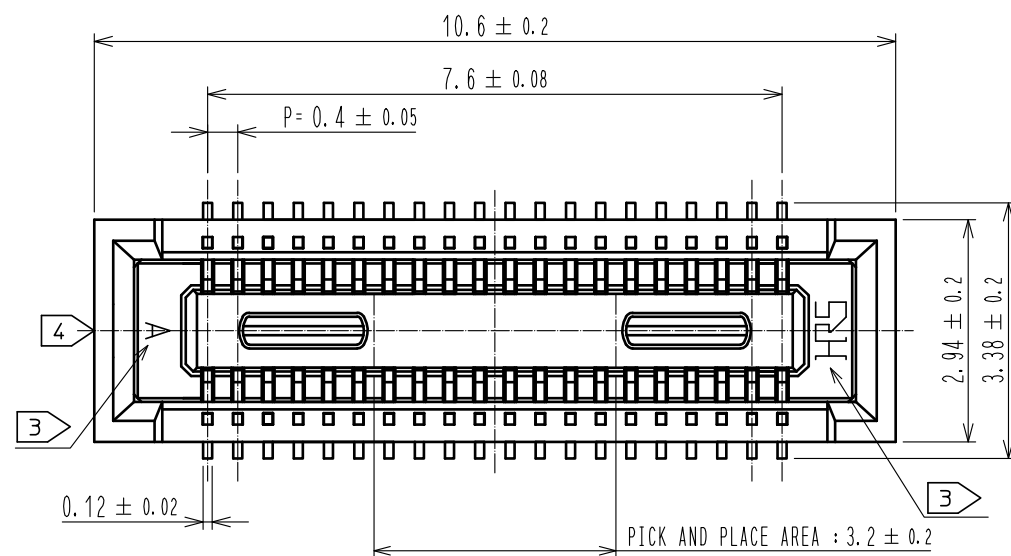


NOTE 1. ALL LEADS CO-PLANARITY SHALL BE 0.1 MAX.
2 IS NO PATTERN AREA OTHER THAN THE SAME CIRCUIT.
3 HRS MARK AND CAV NO. IS INDICATED IN APPROXI POSITION SHOWN.
4 GATE POSITION IS POSITIONED IN APPROXIMAL AREA SHOWN.

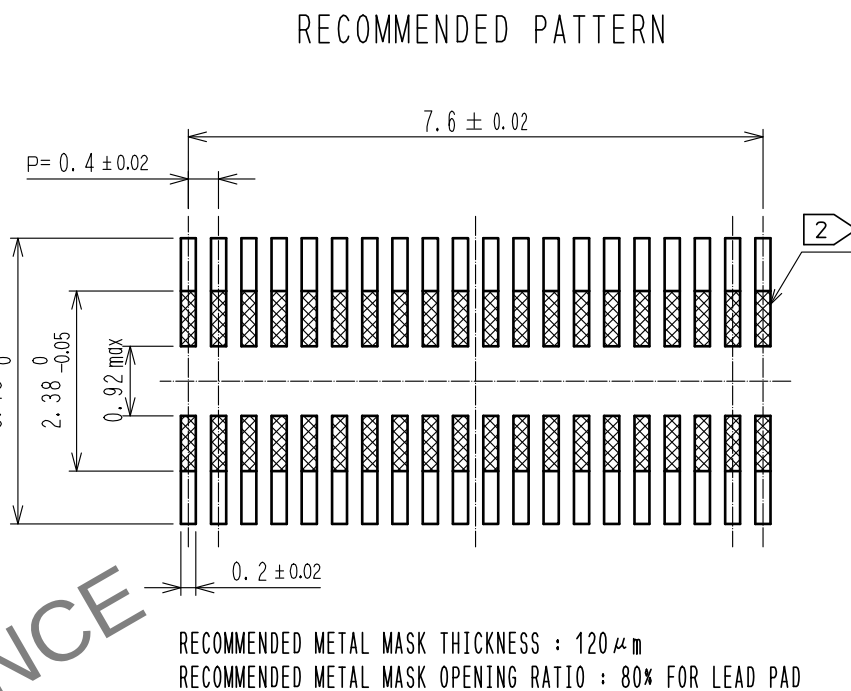

RECOMMENDED METAL MASK THICKNESS : $120 \mu\text{m}$
RECOMMENDED METAL MASK OPENING RATIO : 80% FOR LEAD PAD


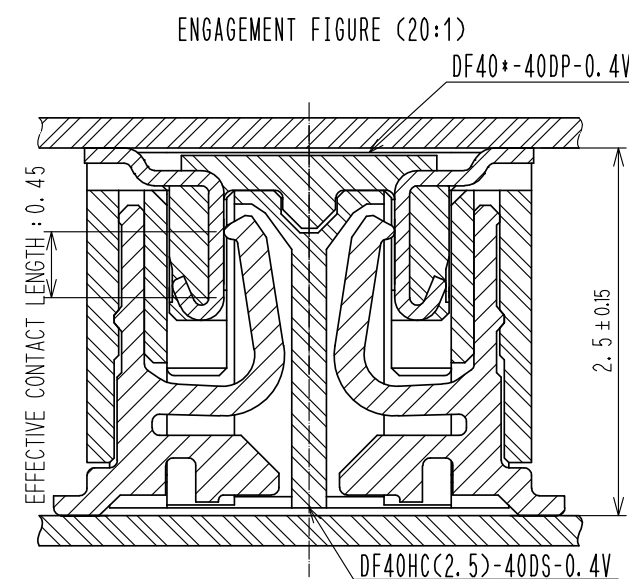
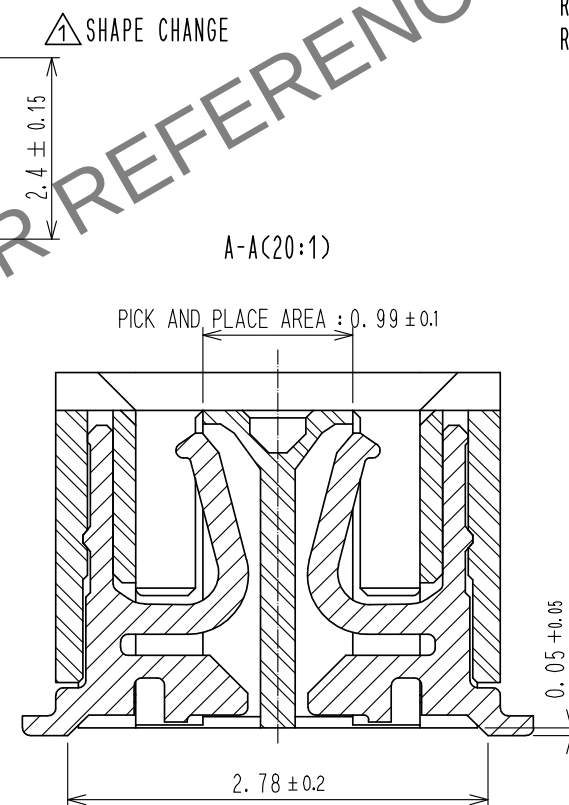


2	PHOSPHOR BRONZE	CONTACT AREA:GOLD 0.05μm MIN		6	PS	CLEAR, REINFORCEMENT COLLAR			
		SMT LEAD:GOLD 0.05μm MIN		5	PS	BLACK, PLASTIC REEL			
		UNDERPLATING:NICKEL 1μm MIN		4	POLYESTER	CLEAR, COVER TAPE			
1	LCP	BLACK, UL94V-0		3	PS	CLEAR, EMBOSSED CARRIER TAPE			
NO.	MATERIAL	FINISH , REMARKS			NO.	MATERIAL	FINISH , REMARKS		
UNITS mm		SCALE 10 : 1		COUNT 1	DESCRIPTION OF REVISIONS DIS-H-00007018		DESIGNED RH. KAGAMI	CHECKED YK. SATAKE	DATE 20201211
		APPROVED : KH. IKEDA		20111227		DRAWING NO. EDC3-319189-02			
 HIROSE ELECTRIC CO., LTD.		CHECKED : TS. MIYAZAKI		20111227		PART NO. DF40HC(2.5)-40DS-0.4V(51)			
		DESIGNED : TR. YUNOKI		20111227		CODE NO. CL0684-4112-9-51			
		DRAWN : TR. YUNOKI		20111227		 			


May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

EMBOSSED CARRIER TAPE PACKAGING (5:1)

STYLE AND DIMENSION OF REEL (FREE SIZE)

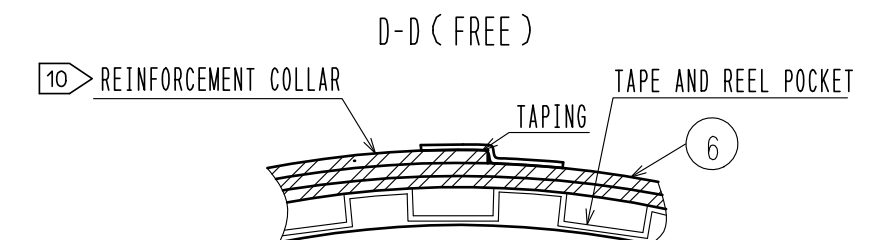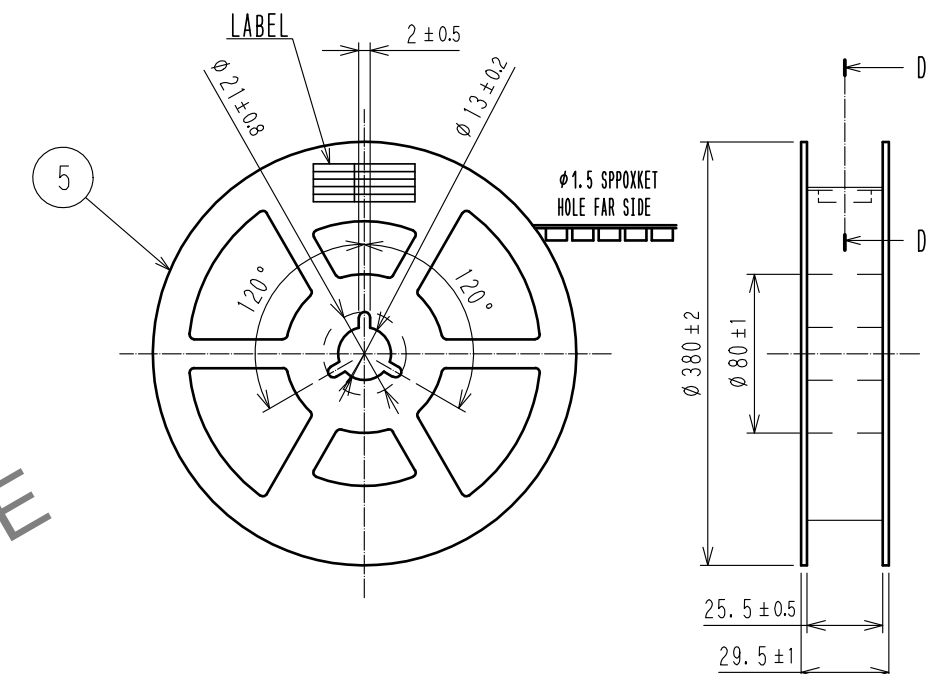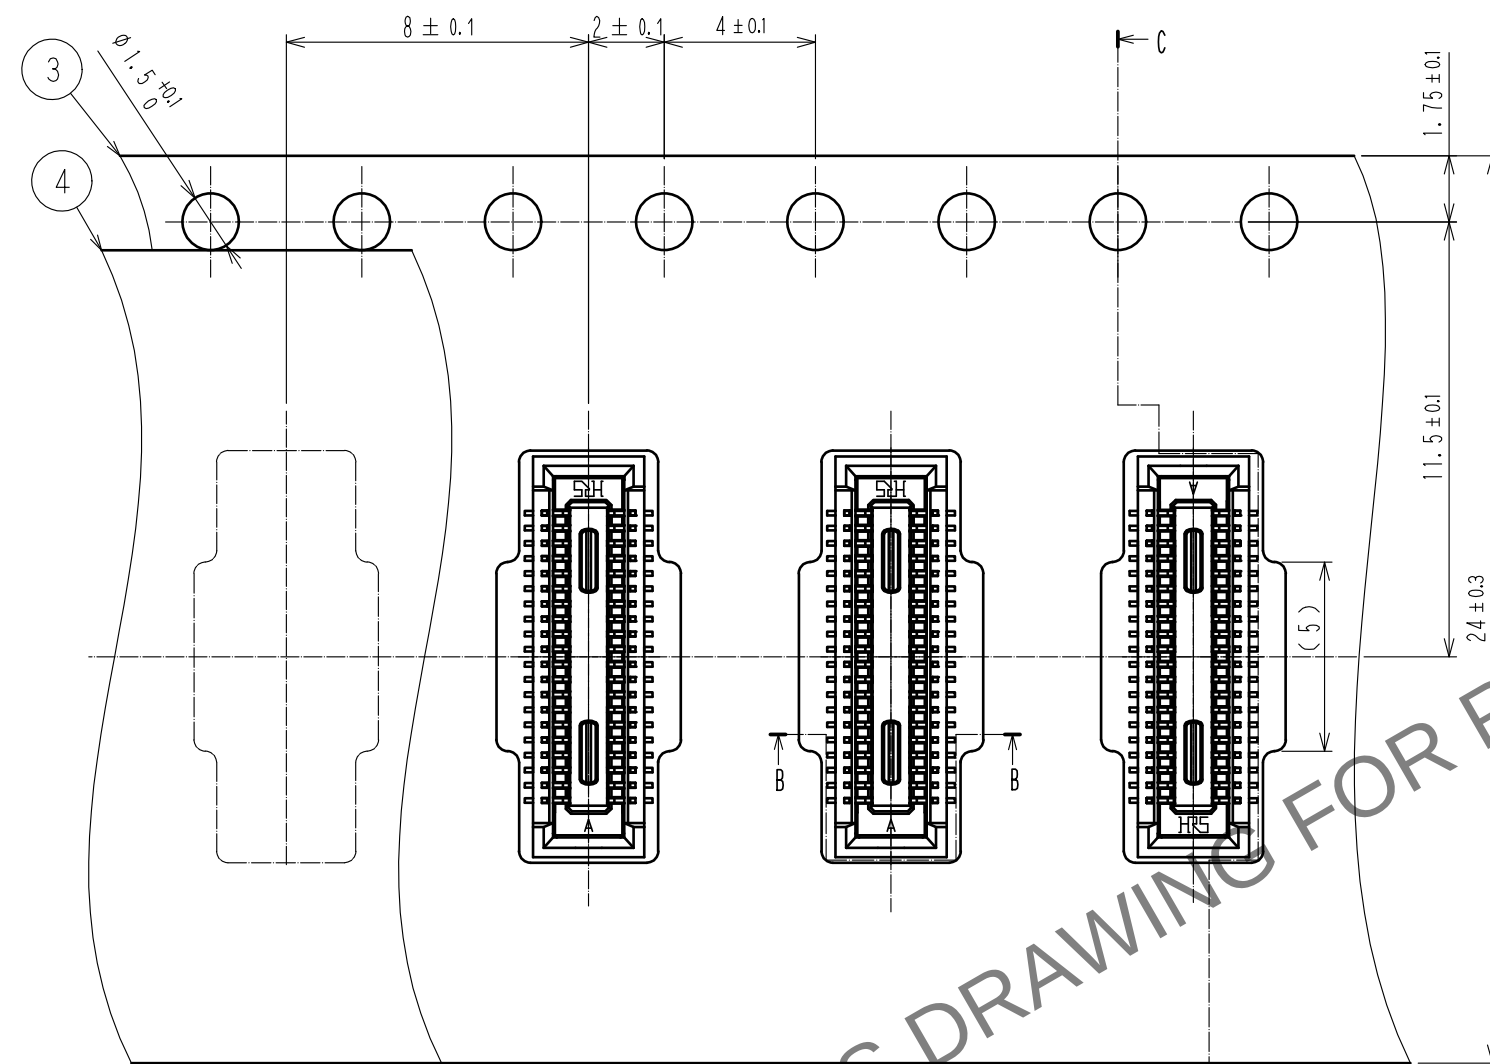

- NOTES)
- PER REEL 3000 CONNECTORS.
 - THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 - REFER TO JIS C 0806(PACKING OF COMPONENTS FOR AUTOMATIC HANDLING)
 - DETAIL OF PART NO. LABEL IS WRITTEN IN JAPANESE.
PRODUCTION DATE:
PRODUCT CODE: CL684-4112-9-51
PART NUMBER: DF40HC(2.5)-40DS-0.4V(51)
NUMBER OF PIECES: 3000 PIECES
SUPPLIER NAME: HIROSE ELECTRIC CO., LTD.
 - THE POCKET SHAPE IS DIFFERENT AT INTERVALS OF FOUR POKES TO AVOID OVERLAP.
 - AFTER PACKAGING, ROLL 2 METERS OF THE REINFORCEMENT COLLAR TO OUTER CIRCUMFERENCE OF TAPE AND REEL POCKET. AND TAPE DOWN AT THE END THE COLLAR.

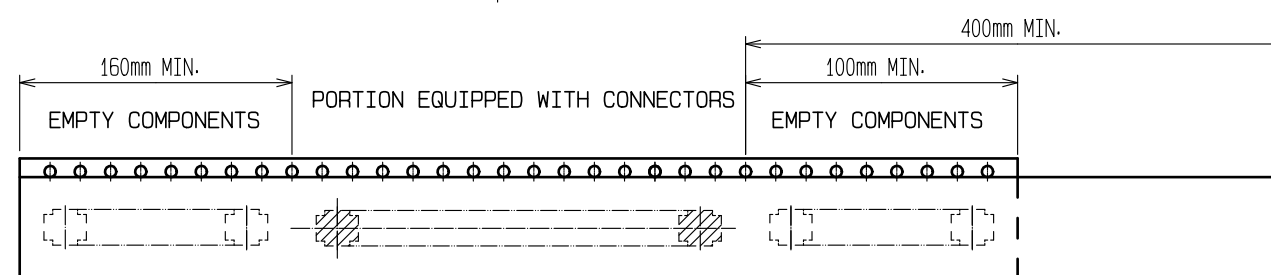

HRS

DRAWING NO.	EDC3-319189-02
PART NO.	DF40HC(2.5)-40DS-0.4V(51)
CODE NO.	CL0684-4112-9-51

2/2