
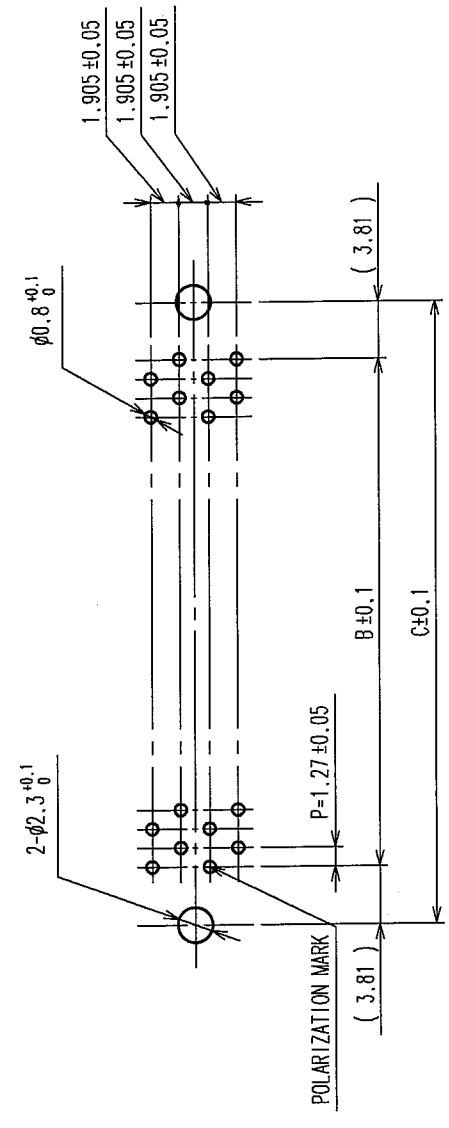
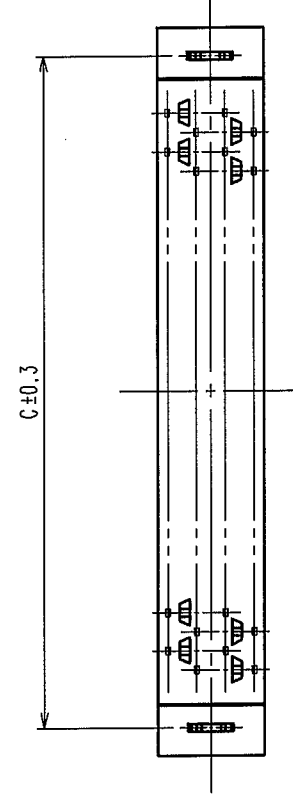
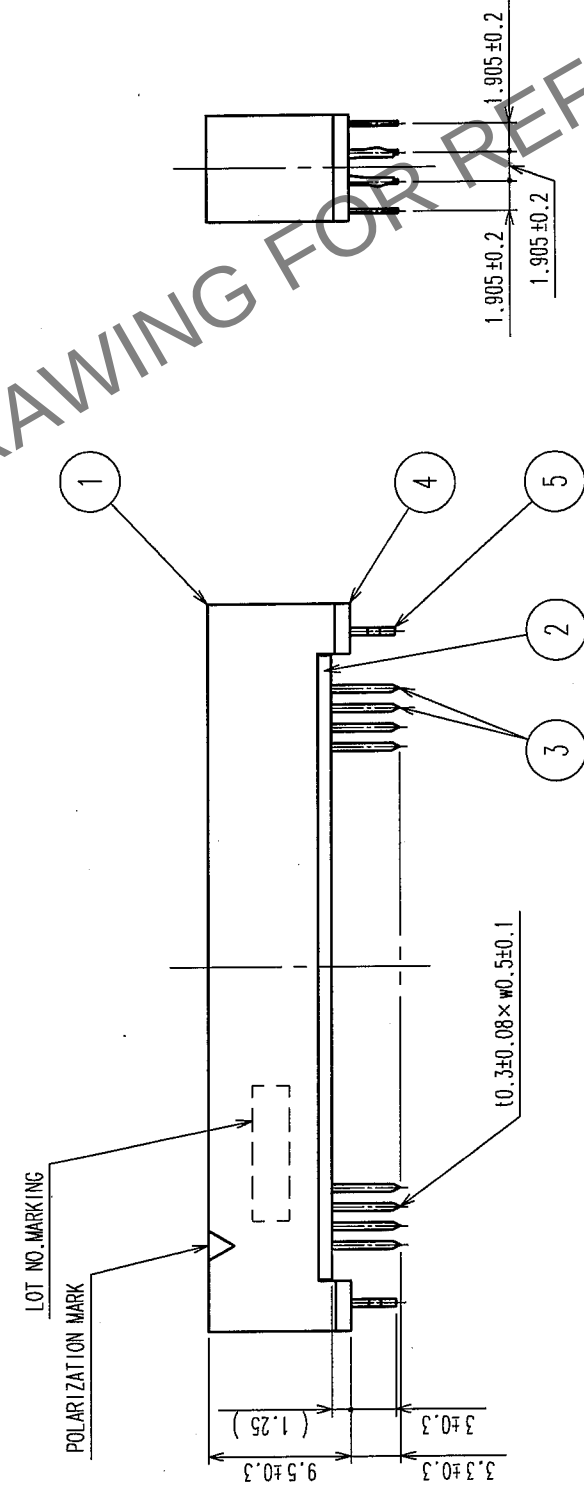


COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT		DESCRIPTION OF REVISIONS	BY	CHKD	DATE
	△						△				
	△						△				
	△						△				

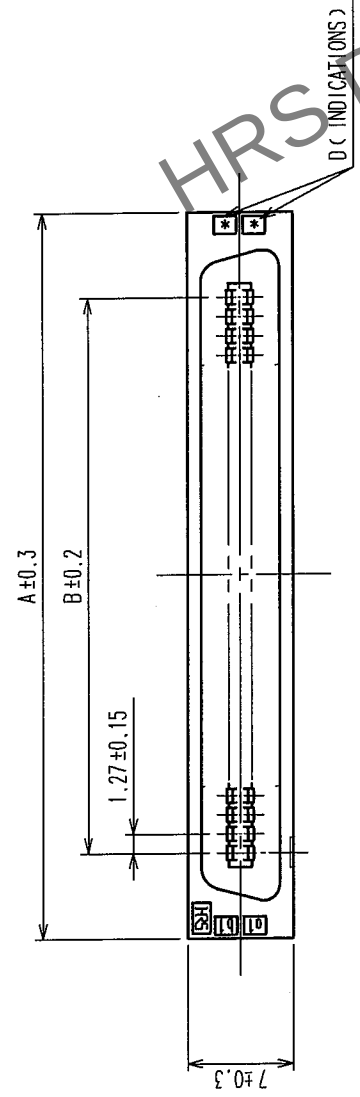

PART No.	CODE No.	2	A	B	C	D
FX2C1-20P-1, 27DSAL (71)	CL572-2261-0-71	20	22.75	11.43	19.05	10
FX2C1-32P-1, 27DSAL (71)	CL572-2262-2-71	32	30.37	19.05	26.67	16
FX2C1-40P-1, 27DSAL (71)	CL572-2263-5-71	40	35.45	24.13	31.75	20
FX2C1-52P-1, 27DSAL (71)	CL572-2264-8-71	52	43.07	31.75	39.37	26
FX2C1-60P-1, 27DSAL (71)	CL572-2265-0-71	60	48.15	36.83	44.45	30
FX2C1-68P-1, 27DSAL (71)	CL572-2266-3-71	68	53.23	41.91	49.53	34
FX2C1-80P-1, 27DSAL (71)	CL572-2267-6-71	80	60.85	49.53	57.15	40
FX2C1-100P-1, 27DSAL (71)	CL572-2268-9-71	100	73.55	62.23	69.85	50
FX2C1-120P-1, 27DSAL (71)	CL572-2269-1-71	120	86.25	74.93	82.55	60

NOTES 1. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.
 $\boxed{2}$ NUMBER OF PIN.

5	PHOSPHOR BRONZE	TIN-PLATING				CONTACT AREA: GOLD 0.2μm min	
4	POLYAMIDE	BLACK	UL94V-0	3		DIP AREA: TIN-PLATING 2μm min	
1,2	POLYAMIDE	BLACK	UL94V-0			UNDER PLATING: NICKEL 2μm min	
NO.	MATERIAL	FINISH, REMARKS		NO.	MATERIAL	FINISH, REMARKS	
CODE NO. (OLD)							
CL							
		DRAWN I. OKAYAMA		DESIGNED K. NAKAMURA		CHECKED H. OKAWA	
		04.06.02		04.06.02		04.06.09	
		PART NO.		FX2C1-**-P-1.27DSAL (71)			
		DRAWING NO.					
SCALE		EDC3-083048-21					
UNITS		HIROSE ELECTRIC CO., LTD		CODE NO.		CL572	
mm						1/1	

TO	PCK			
----	-----	--	--	--