


COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
3	RE-F-09671	K.N	H.Y	04.04.08					

RECOMMENDED LAND PATTERN DIMENSION OF P.C.B. (MOUNTING SIDE)

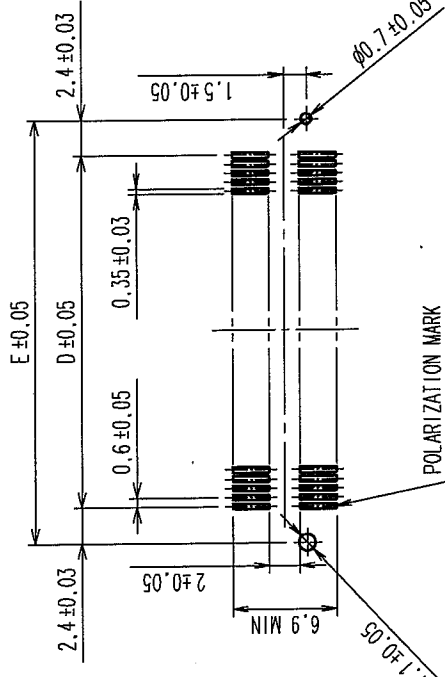

DIMENSION TABLE OF CONNECTOR AND P.C.B. LAND PATTERN.

PART No.	CODE No.	6	7	A	B	C	D	E
FX8C-60P-SV2(93)	CL578-0541-3-93	60	×	24.60	23.00	20.70	17.40	22.20
FX8C-80P-SV2(93)	CL578-0543-9-93	80	×	30.60	29.00	26.70	23.40	28.20
FX8C-100P-SV2(93)	CL578-0545-4-93	100	×	36.60	35.00	32.70	29.40	34.20
FX8C-120P-SV2(93)	CL578-0546-7-93	120	-	42.60	41.00	38.70	35.40	40.20
FX8C-140P-SV2(93)	CL578-0547-0-93	140	×	48.60	47.00	44.70	41.40	46.20

- NOTE 1. LEAD CO-PLANARITY SHALL BE 0.1mm MAX.
2. EMBOSSED CARRIER TAPE PACKAGING SHALL BE APPLIED TO THIS PRODUCT.
3. SEE NEXT PAGE FOR DETAILS.
4. THIS PRODUCT HAS TAPE FOR VACUUM PICKUP.
5. SEE NEXT PAGE FOR DETAIL OF STICKING POSITION, ETC.
6. FOR MODIFICATION, ETC., PREVENTIVE HOLE FOR SINK MARK MAY BE ADDED ACCORDING TO CIRCUMSTANCES.
7. THE DIMENSIONS IN PARENTHESES ARE FOR REFERENCE.

6 NUMBER OF CONTACTS.
7 EXISTENCE
X: PRODUCED, -: NO PRODUCED

1	PPS	LIGHT BROWN (UL94V-0)	2	PHOSPHOR BRONZE	CONTACT AREA: GOLD 0.1μm min LEAD AREA: TIN-PLATING 1μm min UNDER PLATING: NICKEL 1μm min
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS





CODE NO. (OLD) CL	DRAWN S. SUZUKI	DESIGNED K. NAKAMURA	CHECKED H. OKAWA	APPROVED Y. YOSHIMURA	RELEASED
	03.02.04	03.02.12	03.02.14	03.02.15	

DRAWING NO. EDC3-151088-23	PART NO. FX8C-**-P-SV2(93)
-------------------------------	-------------------------------

SCALE FREE	CODE NO.	CL578	1/2
UNITS mm			

May.1.2024 Copyright 2024 HIROSE ELECTRIC CO., LTD. All Rights Reserved.



	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE	COUNT	DESCRIPTION OF REVISIONS	BY	CHKD	DATE
✓						✓				
✓						✓				
✓						✓				

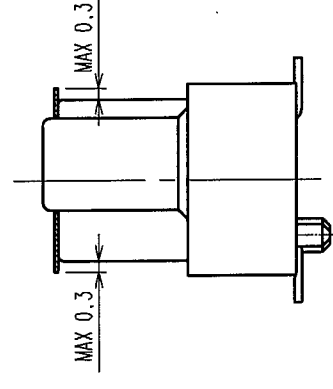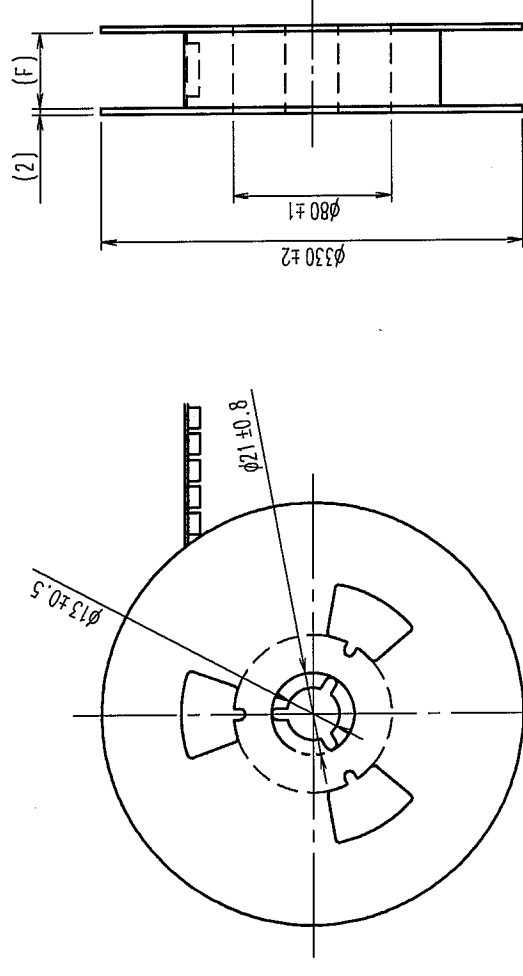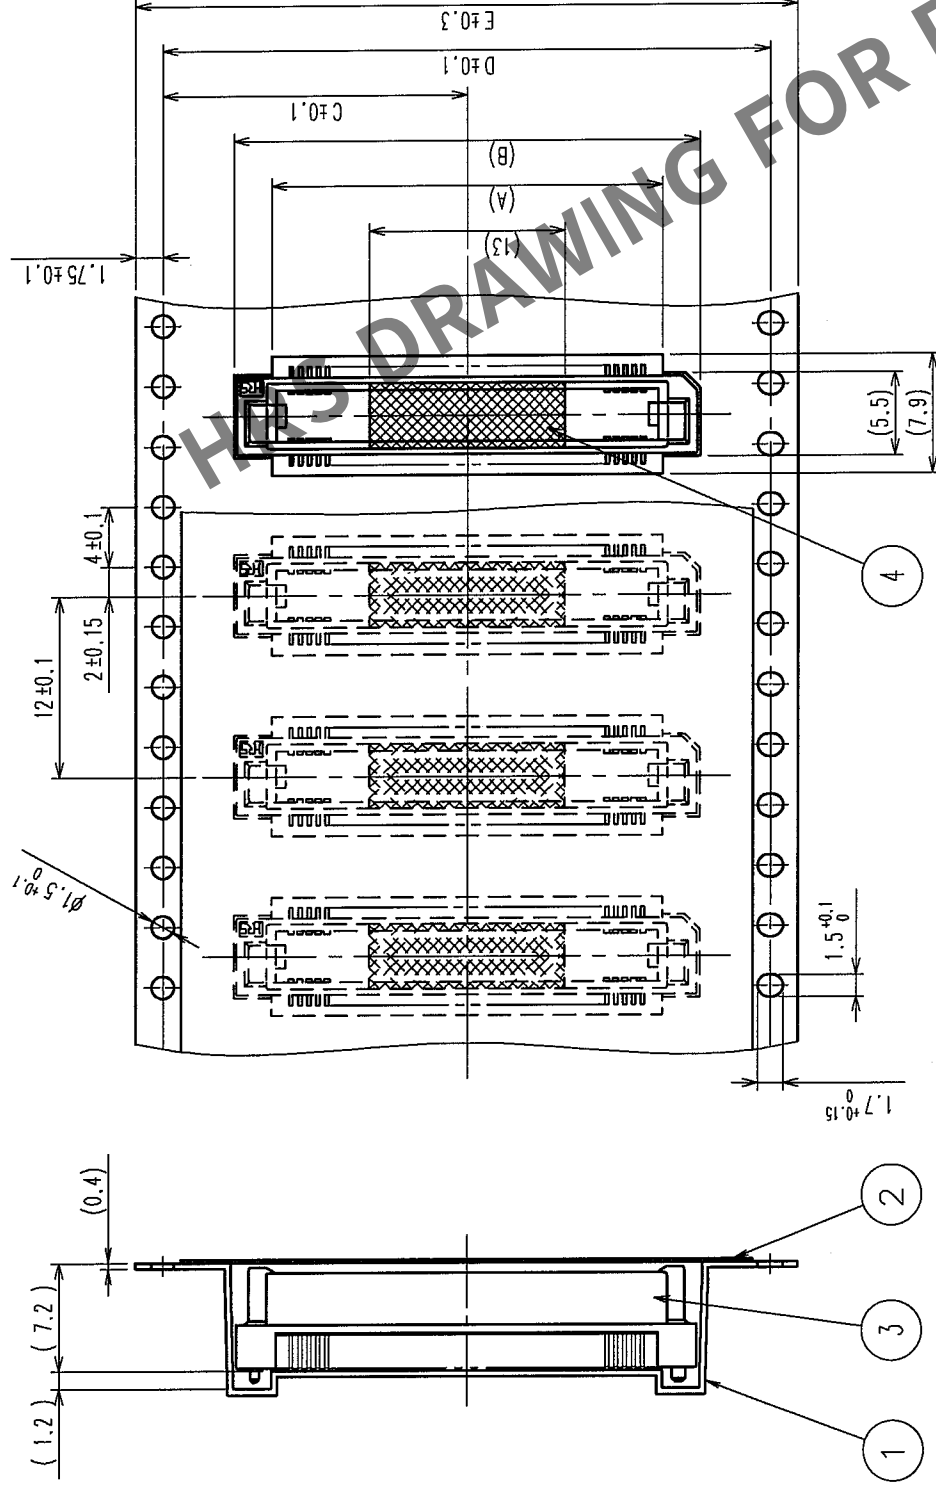

DETAIL OF TAPE FOR VACUUM PICKUP(5:1)

^ DIMENSION TABLE OF EMBOSSED CARRIER TAPE AND REEL.

PART No.	CODE No.			A	B	C	D	E	F
FX8C- 60P-SV2(93)	CL578-0541-3-93	60	×	20	25	20.2	40.4	44	44.4
FX8C- 80P-SV2(93)	CL578-0543-9-93	80	×	26	31	20.2	40.4	44	44.4
FX8C-100P-SV2(93)	CL578-0545-4-93	100	×	32	37	26.2	52.4	56	56.4
FX8C-120P-SV2(93)	CL578-0546-7-93	120	—	38	43	26.2	52.4	56	56.4
FX8C-140P-SV2(93)	CL578-0547-0-93	140	×	44	49	34.2	68.4	72	72.4

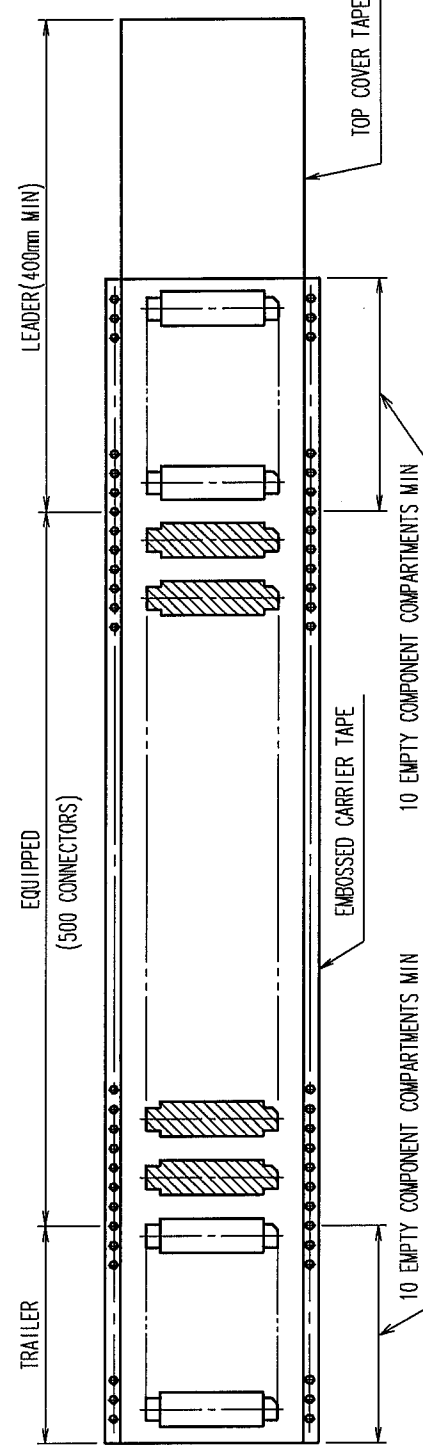

NOTE 1. 1 REEL : 500 CONNECTORS
 2. NUMBER OF CONTACTS
 3. EXISTENCE
 × :PRODUCED, --:NO PRODUCED

2	POLYESTER	(TOP COVER TAPE)	4	POLYIMIDE	(TAPE FOR VACUUM PICKUP)
1	PS 	(EMBOSSED CARRIER TAPE)	3		(CONNECTOR)
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
CODE NO. (OLD) CL DRAWING NO. EDC3-151088-23 					
			DRAWN S. SUZUKI	DESIGNED K. NAKAMURA	CHECKED H. OKAWA
			03.02.04	03.02.12	03.02.14
			PART NO. FX8C-**-P-SV2(93)		
SCALE			CODE NO.		
FREE			CL578		
UNITS			HIROSE ELECTRIC CO., LTD		
mm			2		

TO	PCK			
----	-----	--	--	--